ELLISSE PENDANT MINOR

Federico Palazzari

Realised in various versions through an innovative technology developed by Nemo for coupling extrusions, Ellisse guarantees diffused direct and indirect lighting with the LED housed within the structure while remaining unobtrusive. The design is linear and contemporary, while an elegant black marble base becomes a pedestal for the floor version.



UPLIGHT 2700K

LAMPING

Source	Linear LED
Total power	54W
Emission	diffused
Switching	dimmable
Tension	120V
Color temperature	2700K
Luminous flux	1780lm
Typ CRI	85
IP class	20
Dimensions	37.8' x 15.7' x 0.8'
Materials	Aluminum + PC
Notes	adjustable cable length 9.5’ max, 3500 and 4000K available on request, extra cable on request, integral driver dual capability TRIAC-ELV and 0-10V
Net lamp weight	11 lbs


Codes	*Structure*
ELP LW2 51	white
ELP LN2 51	black
ELP LO2 51	gold painted
ELP LL2 51	polished aluminum
ELP LGW 51	gold polished anodized

PACKAGE

Package 01	Dimension: 31.5 x 59.1 x 5.9 inches / Gross weight: 16.5 lbs

Certificazioni

Intertek

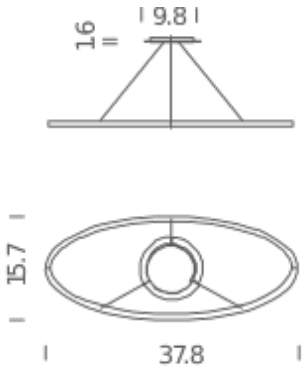

DOWNLIGHT 2700K

LAMPING

Source	Linear LED
Total power	54W
Emission	diffused
Switching	dimmable
Tension	120V
Color temperature	2700K
Luminous flux	1780lm
Typ CRI	85
IP class	20
Dimensions	37.8' x 15.7' x 0.8'
Materials	Aluminum + PC
Notes	adjustable cable length 9.5’ max, 3500 and 4000K available on request, extra cable on request (200USD per a minimum of 20’), integral driver dual capability TRIAC-ELV and 0-10V
Net lamp weight	11 lbs


Codes	*Structure*
ELP LW2 52	white
ELP LN2 52	black
ELP LO2 52	gold painted
ELP LL2 52	polished aluminum
ELP LGW 52	gold polished anodized

PACKAGE

Package 01	Dimension: 31.5 x 59.1 x 5.9 inches / Gross weight: 16.5 lbs

Certificazioni

Intertek

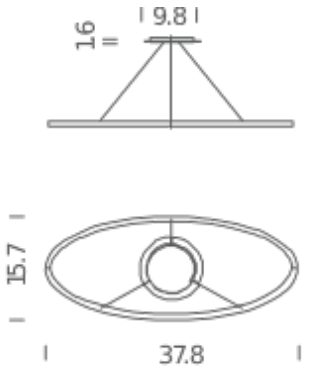

UPLIGHT 3000K

LAMPING

Source	Linear LED
Total power	54W
Emission	diffused
Switching	dimmable
Tension	120V
Color temperature	3000K
Luminous flux	1780lm
Typ CRI	85
IP class	20
Dimensions	37.8' x 15.7' x 0.8'
Materials	Aluminum + PC
Notes	adjustable cable length 9.5’ max, 3500 and 4000K available on request, extra cable on request (200USD per a minimum of 20’), integral driver dual capability TRIAC-ELV and 0-10V
Net lamp weight	11 lbs


Codes	*Structure*
ELP LWW 51	white
ELP LNW 51	black
ELP LOW 51	gold painted
ELP LLW 51	polished aluminum

PACKAGE

Package 01	Dimension: 31.5 x 59.1 x 5.9 inches / Gross weight: 16.5 lbs

Certificazioni

Intertek

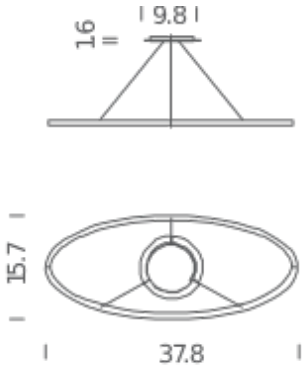

DOWNLIGHT 3000K

LAMPING

Source	Linear LED
Total power	54W
Emission	diffused
Switching	dimmable
Tension	120V
Color temperature	3000K
Luminous flux	1780lm
Typ CRI	85
IP class	20
Dimensions	37.8 x 15.7 x 0.8
Materials	Aluminum + PC
Notes	adjustable cable length 9.5’ max, 3500 and 4000K available on request, extra cable on request (200USD per a minimum of 20’), integral driver dual capability TRIAC-ELV and 0-10V
Net lamp weight	11 lbs

Codes	*Structure*
ELP LWW 52	white
ELP LNW 52	black
ELP LOW 52	gold painted
ELP LLW 52	polished aluminum

PACKAGE

Package 01	Dimension: 31.5 x 59.1 x 5.9 inches / Gross weight: 16.5 lbs

Certificazioni

Intertek

