
ELLISSE PENDANT MEGA

Federico Palazzari

Realised in various versions through an innovative technology developed by Nemo for coupling extrusions, Ellisse guarantees diffused direct and indirect lighting with the LED housed within the structure while remaining unobtrusive. The design is linear and contemporary, while an elegant black marble base becomes a pedestal for the floor version.

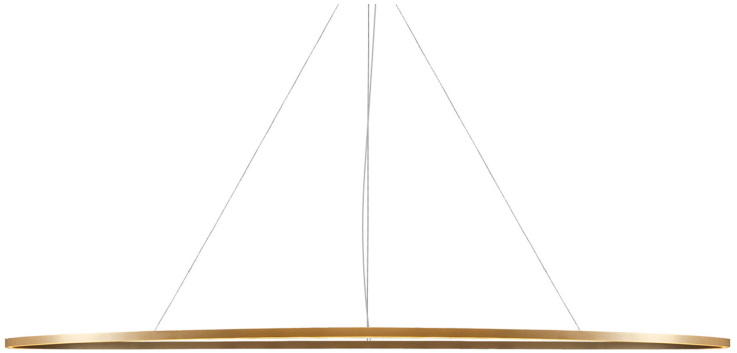

UPLIGHT 2700K

LAMPING

Source	Linear LED
Total power	85W
Emission	diffused
Switching	dimmable
Tension	120V
Color temperature	2700K
Luminous flux	4425lm
Typ CRI	85
IP class	20
Dimensions	73.2' x 37.4' x 8'
Materials	Aluminum + PC
Notes	adjustable cable length 8.2’ max, 3500K and 4000K available on request, extra cable on request integral driver dual capability TRIAC-ELV and 0-10V

Codes

ELP LW2 58
ELP LN2 58
ELP LO2 58

Structure

white
black
gold painted


PACKAGE

Package 01

Dimension: 5.5 x 39.8 x 79.1 inches / Gross weight: 16.5 lbs

Certificazioni



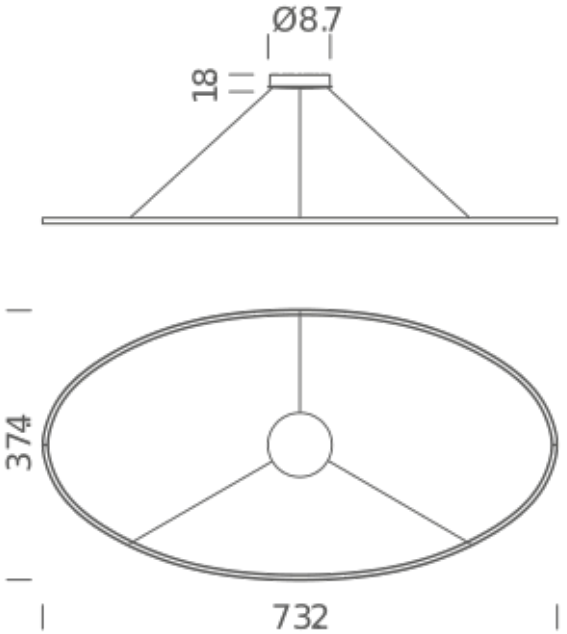

DOWNLIGHT 2700K

LAMPING

Source	Linear LED
Total power	85W
Emission	diffused
Switching	dimmable
Tension	120V
Color temperature	2700K
Luminous flux	4425lm
Typ CRI	85
IP class	20
Dimensions	73.2' x 37.4' x 8'
Materials	Aluminum + PC
Notes	adjustable cable length 8.2’ max, 3500K and 4000K available on request, extra cable on request, integral driver dual capability TRIAC-ELV and 0-10V


Codes	*Structure*
ELP LW2 59	white
ELP LN2 59	black
ELP LO2 59	gold painted

PACKAGE

Package 01	Dimension: 5.5 x 39.8 x 79.1 inches / Gross weight: 16.5 lbs

Certificazioni



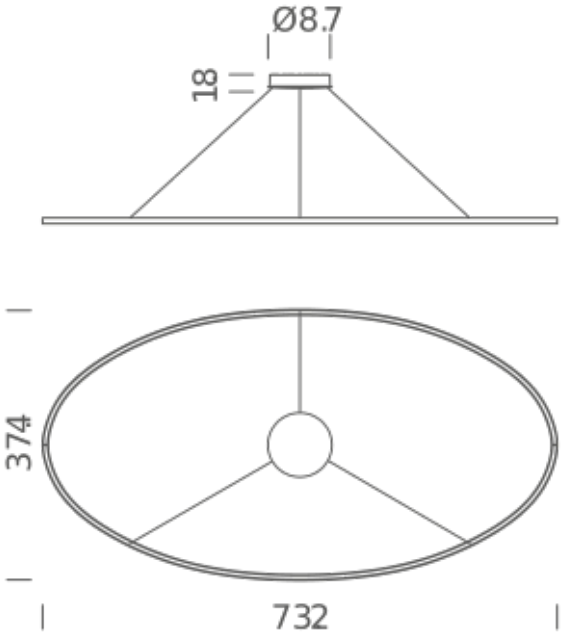

UPLIGHT 3000K

LAMPING

Source	linear LED
Total power	85W
Emission	diffused
Switching	dimmable
Tension	120V
Color temperature	3000K
Luminous flux	4425lm
Typ CRI	85
IP class	20
Dimensions	73.2' x 37.4' x 8'
Materials	Aluminum + PC
Notes	adjustable cable length 8.2’ max, 3500K and 4000K available on request, extra cable on request, integral driver dual capability TRIAC-ELV and 0-10V


Codes	*Structure*
ELP LWW 58	white
ELP LNW 58	black
ELP LOW 58	gold painted

PACKAGE

Package 01	Dimension: 5.5 x 39.8 x 79.1 inches / Gross weight: 16.5 lbs

Certificazioni



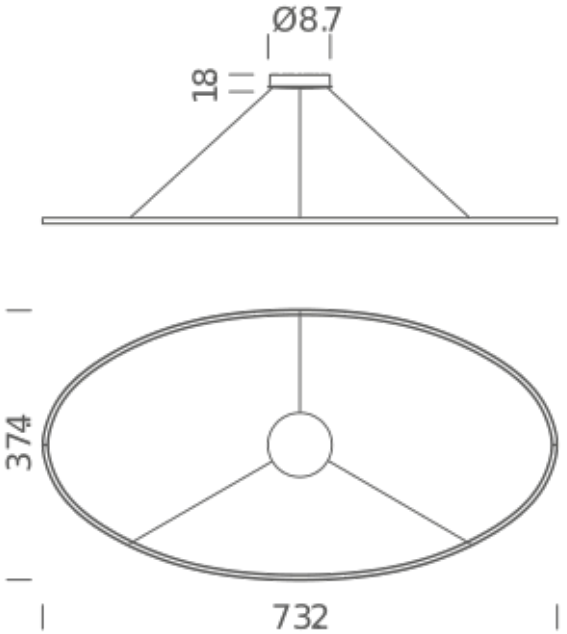

DOWNLIGHT 3000K

LAMPING

Source	Linear LED
Total power	85W
Emission	diffused
Switching	diffused
Tension	120V
Color temperature	3000K
Luminous flux	4425lm
Typ CRI	85
IP class	20
Dimensions	73.2' x 37.4' x 8'
Materials	Aluminum + PC
Notes	adjustable cable length 8.2’ max, 3500K and 4000K available on request, extra cable on request, integral driver dual capability TRIAC-ELV and 0-10V

Codes	*Structure*
ELP LWW 59	white
ELP LNW 59	black
ELP LOW 59	gold painted

PACKAGE

Package 01	Dimension: 5.5 x 39.8 x 79.1 inches / Gross weight: 16.5 lbs

Certificazioni



