

# SPIGOLO WALL CEILING

*Studiocharlie*

Designed to provide 360° directional lighting, the Spigolo collection features LED light sources housed within an extruded aluminium and tubular structure, connected by moulded polymer joints, which allow the profiles to rotate to produce direct or indirect lighting, shielded by a polycarbonate opal diffuser. The floor version is designed to provide a virtual room divider, while the ceiling and wall versions provide versatile and comfortable ambient lighting.



2700K

LAMPING

Source	linear LED
Total power	14W
Emission	diffused
Tension	120V
Color temperature	2700K
Luminous flux	560lm
Typ CRI	85
IP class	20
Dimensions	14.2 X 7.5 X 0.8
Materials	aluminium + PC + ABS
Notes	360° orientable diffuser, white RAL 9003, black RAL 9005, 3500K and 4000K available on request
Net lamp weight	3.3 lbs

Codes


SPI LW2 31  
SPI LN2 31

Structure

white  
black

PACKAGE

Package 01                      Dimension: 11.8 X 17.7 X 7.9 inches / Gross weight: 4.6 lbs

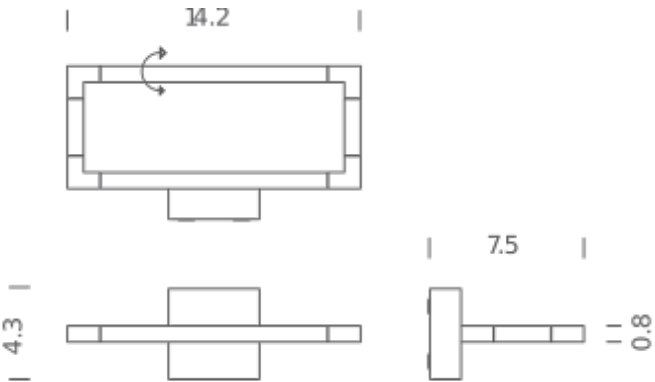

3000K

LAMPING

Source	linear LED
Total power	14W
Emission	diffused
Tension	120V
Color temperature	3000K
Luminous flux	560lm
Typ CRI	85
IP class	20
Dimensions	14.2 X 7.5 X 0.8
Materials	aluminium + PC + ABS
Notes	360° orientable diffuser, white RAL 9003, black RAL 9005, 3500K and 4000K available on request
Net lamp weight	3.3 lbs

Codes

SPI LWW 31  
SPI LNN 31

Structure

white  
black

PACKAGE

Package 01      Dimension: 11.8 X 17.7 X 7.9 inches / Gross weight: 4.6 lbs

