

UNTITLED MINI SPOT

A definitive synthesis of mechanics and lighting technology, this design is clean and essential, with miniaturized joints that allow for extreme flexibility of movement. The Linear version has been designed explicitly with optics to ensure maximum visual comfort in work environments.



2700K

LAMPING

Source	LED board
Total power	7W
Emission	direct
Switching	dimmable on board
Tension	120V
Color temperature	2700K
Luminous flux	485lm
Typ CRI	90
IP class	20
Dimensions	5.9'x22.4'
Materials	aluminum, technopolymer
Notes	cable length 6.6', 40° LED spot, 155° joint rotation, accessories sold separately, black RAL 9005
Accessories	Desk clamp, Table base, Wall fixing,


Codes

UNT LN2 16
UNT LW2 16
UNT LD2 16
UNT LG2 16

Structure

black
white
titan grey
gold

Certificazioni

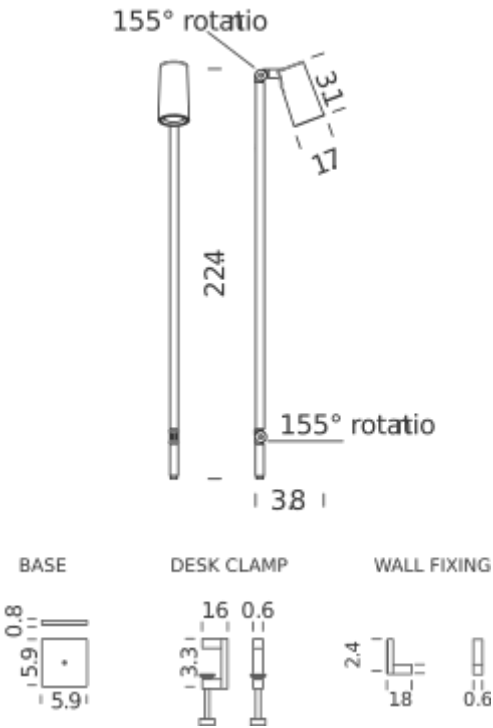

3000K

LAMPING

Source	LED board
Total power	7W
Emission	direct
Switching	dimmable on board
Tension	120V
Color temperature	3000K
Luminous flux	485lm
Typ CRI	90
IP class	20
Dimensions	5.9'x22.4'
Materials	aluminum, technopolymer
Notes	cable length 6.6', 40° LED spot, 155° joint rotation, accessories sold separately, black RAL 9005
Accessories	Desk clamp, Table base, Wall fixing,

Codes

UNT LNN 16
UNT LWW 16
UNT LDD 16
UNT LGG 16

Structure

black
white
titan grey
gold

Certificazioni

