

ELLISSE PENDANT MINOR

Federico Palazzari

Realised in various versions through an innovative technology developed by Nemo for coupling extrusions, Ellisse guarantees diffused direct and indirect lighting with the LED housed within the structure while remaining unobtrusive. The design is linear and contemporary, while an elegant black marble base becomes a pedestal for the floor version.



UPLIGHT 2700K

LAMPING

Source	Linear LED
Total power	54W
Emission	diffused
Switching	dimmable
Tension	120V
Color temperature led	2700K
Luminous flux led	1780lm
Typ CRI	85
Ip class	20
Dimensions	37.8' x 15.7' x 0.8'
Materials	Aluminum + PC
Notes	adjustable cable length 9.5' max, 3500 and 4000K available on request, extra cable on request, integral driver dual capability TRIAC-ELV and 0-10V
Net lamp weight	11 lbs

Codes

ELP LW2 51
ELP LN2 51
ELP LO2 51
ELP LL2 51
ELP LGW 51


Structure

white
black
gold painted
polished aluminum
gold polished anodized

PACKAGE

Package 01 Dimension: 31.5 x 59.1 x 5.9 inches / Gross weight: 16.5 lbs

Certificazioni

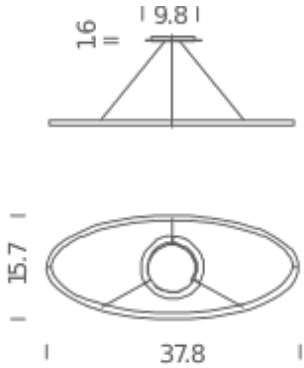

DOWNLIGHT 2700K

LAMPING

Source	Linear LED
Total power	54W
Emission	diffused
Switching	dimnable
Tension	120V
Color temperature led	2700K
Luminous flux led	1780lm
Typ CRI	85
Ip class	20
Dimensions	37.8' x 15.7' x 0.8'
Materials	Aluminum + PC
Notes	adjustable cable length 9.5' max, 3500 and 4000K available on request, extra cable on request (200USD per a minimum of 20'), integral driver dual capability TRIAC- ELV and 0-10V
Net lamp weight	11 lbs

Codes

ELP LW2 52
ELP LN2 52
ELP LO2 52
ELP LL2 52
ELP LGW 52


Structure

white
black
gold painted
polished aluminum
gold polished anodized

PACKAGE

Package 01 Dimension: 31.5 x 59.1 x 5.9 inches / Gross weight: 16.5 lbs

Certificazioni

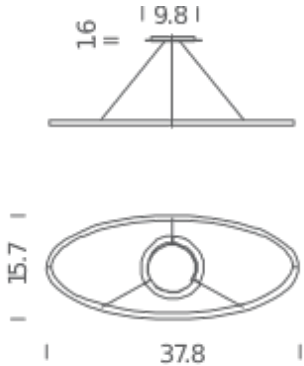

UPLIGHT 3000K

LAMPING

Source	Linear LED
Total power	54W
Emission	diffused
Switching	dimmable
Tension	120V
Color temperature led	3000K
Luminous flux led	1780lm
Typ CRI	85
Ip class	20
Dimensions	37.8' x 15.7' x 0.8'
Materials	Aluminum + PC
Notes	adjustable cable length 9.5' max, 3500 and 4000K available on request, extra cable on request (200USD per a minimum of 20'), integral driver dual capability TRIAC- ELV and 0-10V
Net lamp weight	11 lbs

Codes

- ELP LWW 51
- ELP LNW 51
- ELP LOW 51
- ELP LLW 51


Structure

- white
- black
- gold painted
- polished aluminum

PACKAGE

Package 01	Dimension: 31.5 x 59.1 x 5.9 inches / Gross weight: 16.5 lbs
------------	--------------------------------------------------------------

Certificazioni

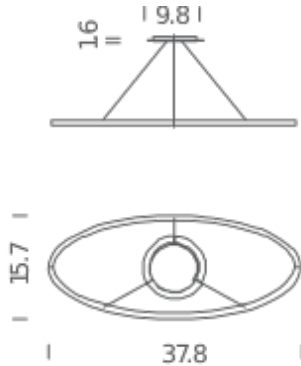

DOWNLIGHT 3000K

LAMPING

Source	Linear LED
Total power	54W
Emission	diffused
Switching	dimmable
Tension	120V
Color temperature led	3000K
Luminous flux led	1780lm
Typ CRI	85
Ip class	20
Dimensions	37.8 x 15.7 x 0.8
Materials	Aluminum + PC
Notes	adjustable cable length 9.5' max, 3500 and 4000K available on request, extra cable on request (200USD per a minimum of 20'), integral driver dual capability TRIAC- ELV and 0-10V
Net lamp weight	11 lbs

Codes

ELP LWW 52
ELP LNW 52
ELP LOW 52
ELP LLW 52

Structure

white
black
gold painted
polished aluminum

PACKAGE

Package 01 Dimension: 31.5 x 59.1 x 5.9 inches / Gross weight: 16.5 lbs

Certificazioni

