SPIGOLO WALL CEILING

Studiocharlie

Designed to provide 360° directional lighting, the Spigolo collection features LED light sources housed within an extruded aluminium and tubular structure, connected by moulded polymer joints, which allow the profiles to rotate to produce direct or indirect lighting, shielded by a polycarbonate opal diffuser. The floor version is designed to provide a virtual room divider, while the ceiling and wall versions provide versatile and comfortable ambient lighting.



2700K

LAMPING

linear LED Source 14W Total power Emission diffused Tension 120V Color temperature led 2700K Luminous flux led 560lm Typ CRI 85 Ip class 20

Dimensions 14.2 X 7.5 X 0.8

Materials aluminium + PC + ABS

Notes 360° orientable diffuser, white RAL 9003, black RAL


9005, 3500K and 4000K available on request

Net lamp weight 3.3 lbs

Codes Structure
SPI LW2 31 white
SPI LN2 31 black

PACKAGE

Package 01 Dimension: 11.8 X 17.7 X 7.9 inches / Gross weight: 4.6 lbs

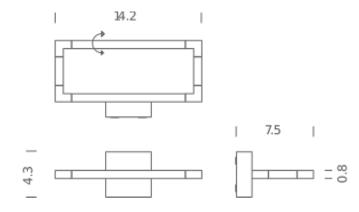

3000K

LAMPING

linear LED Source 14W Total power Emission diffused Tension 120V Color temperature led 3000K Luminous flux led 560lm Typ CRI 85 Ip class 20

Dimensions 14.2 X 7.5 X 0.8

Materials aluminium + PC + ABS

Notes 360° orientable diffuser, white RAL 9003, black RAL

9005, 3500K and 4000K available on request

Net lamp weight 3.3 lbs

Codes Structure
SPI LWW 31 white
SPI LNN 31 black

PACKAGE

Package 01 Dimension: 11.8 X 17.7 X 7.9 inches / Gross weight: 4.6 lbs

