UNTITLED MINI SPOT

A definitive synthesis of mechanics and lighting technology, this design is clean and essential, with miniaturized joints that allow for extreme flexibility of movement. The Linear version has been designed explicitly with optics to ensure maximum visual comfort in work environments.





2700K

LAMPING

Source LED board Total power 7W

Emission direct

Switching dimmable on board

Tension 120V
Color temperature led 2700K
Luminous flux led 485lm
Typ CRI 90
Ip class 20

Dimensions 5.9'x22.4'

Materials aluminum, technopolymer

Notes cable length 6.6', 40° LED spot, 155° joint rotation,

accessories sold separately, black RAL 9005

Desk clamp, | Table base, | Wall fixing,


Codes Structure

UNT LN2 16 black
UNT LW2 16 white
UNT LD2 16 titan grey
UNT LG2 16 gold

Certificazioni

Accessories



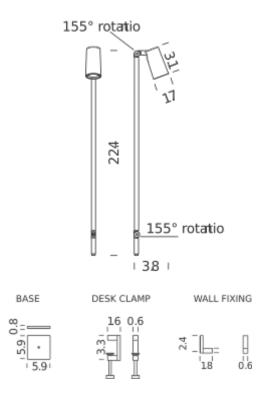

3000K

LAMPING

Source LED board Total power 7W

Emission direct

Switching dimmable on board

Tension 120V
Color temperature led 3000K
Luminous flux led 485lm
Typ CRI 90
Ip class 20

Dimensions 5.9'x22.4'

Materials aluminum, technopolymer

Notes cable length 6.6', 40° LED spot, 155° joint rotation,

accessories sold separately, black RAL 9005

Accessories Desk clamp, | Table base, | Wall fixing,

Codes Structure

UNT LNN 16 black
UNT LWW 16 white
UNT LDD 16 titan grey
UNT LGG 16 gold

Certificazioni



