


ZIRKOL – C

ZIRKOL – C is a family of circular suspension lamps suitable for general and decorative lighting. Anodized aluminium body and opal screen for homogeneous lighting.

Available as single direct light emission version with high flux and different colour temperatures. Driver and dimmer interface included

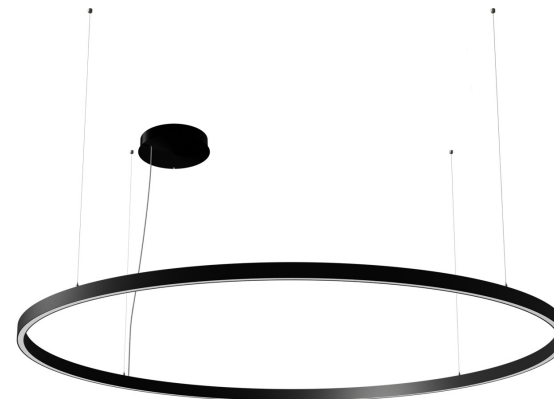

HOME 33.5" | DOWNLIGHT - 2700K

LAMPING

Source	linear LED
Total power	35W
Emission	diffused
Switching	dimmable 0-10V
Tension	110-277V
Color temperature led	2700K
Luminous flux led	2000lm
Typ CRI	90
Ip class	IP40
Dimensions	ø33,5"x1,9"
Materials	aluminium
Notes	RAL 9005 black RAL 9016 white shipped assembled Suspension 3 points at 120° 1 electrical cable 13' 3 adjustable metal cables length 9.8'
Net lamp weight	77 lbs

Codes

UZRC1608G15DBO
UZRC1608G15DNE
UZRC1608G15DOR


Structure

white
black
gold


PACKAGE

Package 01	Dimension: 43x43x4.3 inches
------------	-----------------------------


CIRCLE HOME 39.4"



CIRCLE HOME 59"

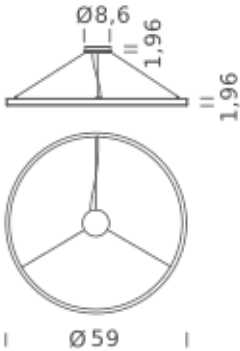

CIRCLE 78.7

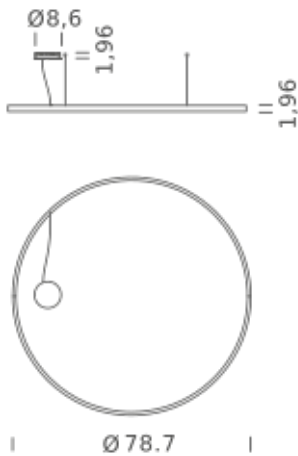

HOME 33.5" | DOWNLIGHT - 3000K

LAMPING

Source	linear LED
Total power	35W
Emission	diffused
Switching	dimnable 0-10V
Tension	110-277V
Color temperature led	3000K
Luminous flux led	2200lm
Typ CRI	90
Ip class	IP40
Dimensions	ø33,5"x1,9"
Materials	aluminium
Notes	RAL 9005 black RAL 9016 white shipped assembled Suspension 3 points at 120° 1 electrical cable 13' 3 adjustable metal cables length 9.8'
Net lamp weight	77 lbs

Codes

UZRC1608G15WBO
UZRC1608G15WNE
UZRC1608G15WOR


Structure

white
black
gold


PACKAGE

Package 01	Dimension: 43x43x4.3 inches
------------	-----------------------------


CIRCLE HOME 39.4"



CIRCLE HOME 59"

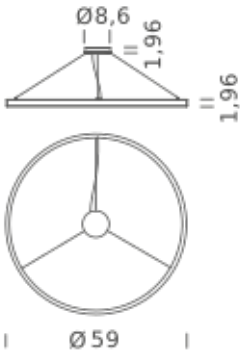

CIRCLE 78.7

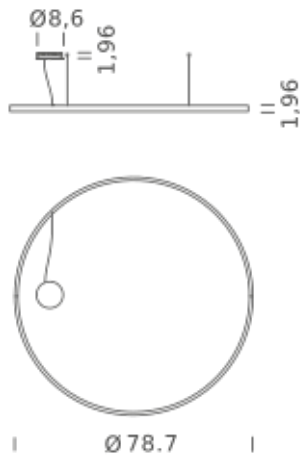

HOME 33.5" | DOWNLIGHT - 4000K

LAMPING

Source	linear LED
Total power	35W
Emission	diffused
Switching	dimmable 0-10V
Tension	110-277V
Color temperature led	4000K
Luminous flux led	2360lm
Typ CRI	90
Ip class	IP40
Dimensions	ø33,5"x1,9"
Materials	aluminium
Notes	RAL 9005 black RAL 9016 white shipped assembled Suspension 3 points at 120° 1 electrical cable 13' 3 adjustable metal cables length 9.8'
Net lamp weight	77 lbs

Codes

UZRC1608G15NBO
UZRC1608G15NNE
UZRC1608G15NOR


Structure

white
black
gold


PACKAGE

Package 01	Dimension: 43x43x4.3 inches
------------	-----------------------------


CIRCLE HOME 39.4"



CIRCLE HOME 59"

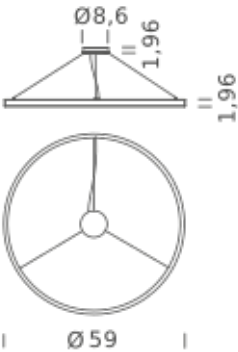

CIRCLE 78.7

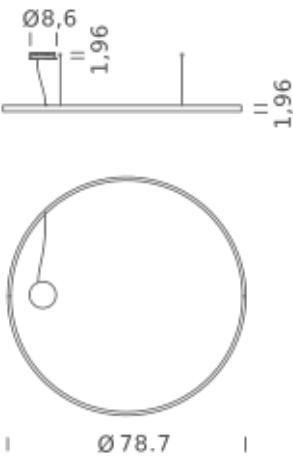

HOME 33.5" | UP-DOWNLIGHT - 2700K

LAMPING

Source	linear LED
Total power	70W
Emission	diffused
Switching	dimmable 0-10V
Tension	110-277V
Color temperature led	2700K
Luminous flux led	4000lm
Typ CRI	90
Ip class	IP40
Dimensions	ø33,5"x1,9"
Materials	aluminium
Notes	RAL 9005 black RAL 9016 white shipped assembled Suspension 3 points at 120° 1 electrical cable 13' 3 adjustable metal cables length 9.8'


Codes

UZRC1708G15DBO
UZRC1708G15DNE
UZRC1708G15DOR


Structure

white
black
gold


CIRCLE HOME 39.4"



CIRCLE HOME 59"

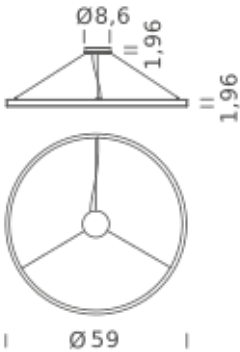

CIRCLE 78.7

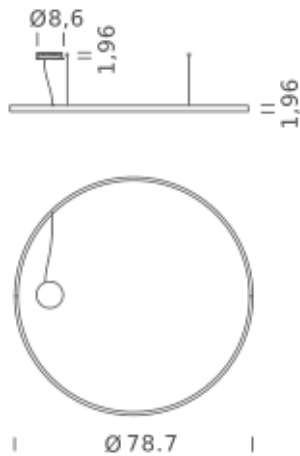

HOME 33.5" | UP-DOWNLIGHT - 3000K

LAMPING

Source	linear LED
Total power	70W
Emission	diffused
Switching	dimnable 0-10V
Tension	110-277V
Color temperature led	3000K
Luminous flux led	4400lm
Typ CRI	90
Ip class	IP40
Dimensions	ø33,5"x1,9"
Materials	aluminium
Notes	RAL 9005 black RAL 9016 white shipped assembled Suspension 3 points at 120° 1 electrical cable 13' 3 adjustable metal cables length 9.8'


Codes

UZRC1708G15WBO
UZRC1708G15WNE
UZRC1708G15WOR


Structure

white
black
gold


CIRCLE HOME 39.4"



CIRCLE HOME 59"

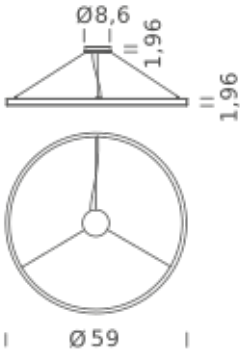

CIRCLE 78.7

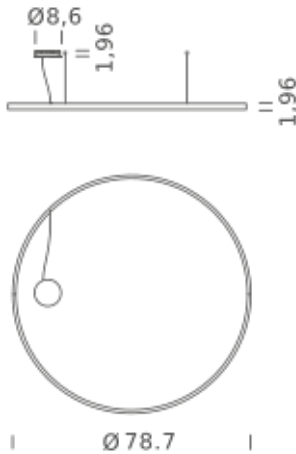

HOME 33.5" | UP-DOWNLIGHT - 4000K

LAMPING

Source	linear LED
Total power	70W
Emission	diffused
Switching	dimmable 0-10V
Tension	110-277V
Color temperature led	4000K
Luminous flux led	4720lm
Typ CRI	90
Ip class	IP40
Dimensions	ø33,5"x1,9"
Materials	aluminium
Notes	RAL 9005 black RAL 9016 white shipped assembled Suspension 3 points at 120° 1 electrical cable 13' 3 adjustable metal cables length 9.8'


Codes

UZRC1708G15NBO
UZRC1708G15NNE
UZRC1708G15NOR


Structure

white
black
gold


CIRCLE HOME 39.4"



CIRCLE HOME 59"

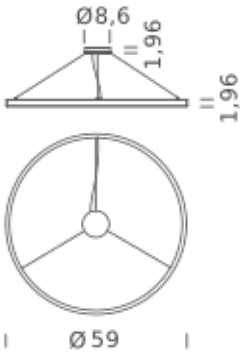

CIRCLE 78.7

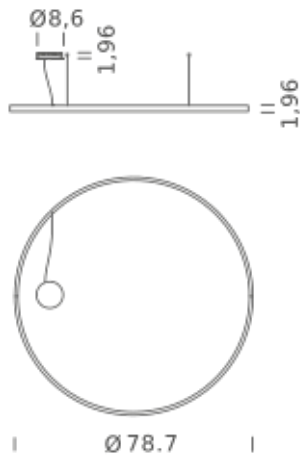

HOME 39.4" | DOWNLIGHT - 2700K

LAMPING

Source	linear LED
Total power	45W
Emission	diffused
Switching	dimmable 0-10V
Tension	110/277V
Color temperature led	2700K
Luminous flux led	2616lm
Typ CRI	90
Ip class	IP40
Dimensions	ø39.4"x1.9"
Materials	aluminum
Notes	RAL 9005 black RAL 9016 white shipped assembled round canopy with 1 x driver WALIMLED100/24 1 x dimmer interface WDIMDALIHP Suspension 3 points at 120° 1 electrical cable 13' 3 adjustable metal cables length 9.8'

Codes

UZRC1610G15DBO
UZRC1610G15DNE
UZRC1610G15DOR


Structure

white
black
gold


Certificazioni




CIRCLE HOME 39.4"



CIRCLE HOME 59"

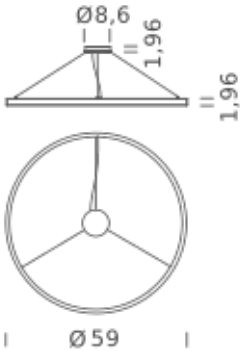

CIRCLE 78.7

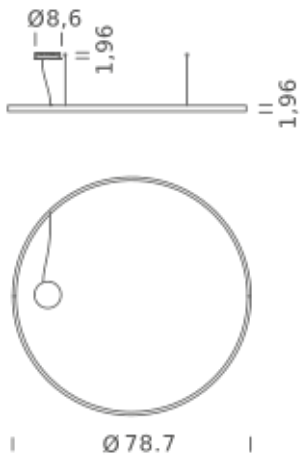

HOME 39.4" | DOWNLIGHT - 3000K

LAMPING

Source	linear LED
Total power	45W
Emission	diffused
Switching	dimmable 0-10V
Tension	110/277V
Color temperature led	3000K
Luminous flux led	2769lm
Typ CRI	90
Ip class	40
Dimensions	ø39.4"x1.9"
Materials	aluminum
Notes	RAL 9005 black RAL 9016 white shipped assembled round canopy with 1 x driver WALIMLED100/24 1 x dimmer interface WDIMDALIHP Suspension 3 points at 120° 1 electrical cable 13' 3 adjustable metal cables length 9.8'

Codes

UZRC1610G15WBO
UZRC1610G15WNE
UZRC1610G15WOR


Structure

white
black
gold


Certificazioni




CIRCLE HOME 39.4"



CIRCLE HOME 59"

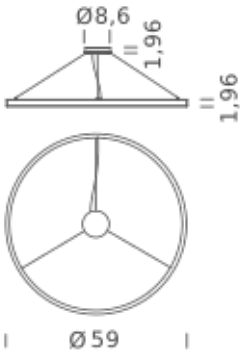

CIRCLE 78.7

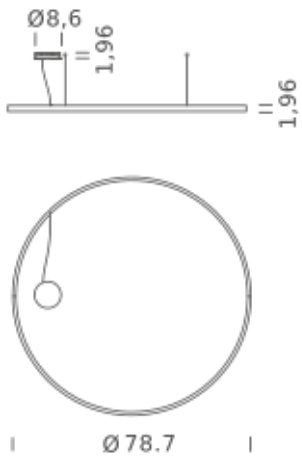

HOME 39.4" | DOWNLIGHT - 4000K

LAMPING

Source	linear LED
Total power	45W
Emission	diffused
Switching	dimmable 0-10V
Tension	110/277V
Color temperature led	4000K
Luminous flux led	3077lm
Typ CRI	90
Ip class	IP40
Dimensions	ø39.4"x1.9"
Materials	aluminum
Notes	RAL 9005 black RAL 9016 white shipped assembled round canopy with 1 x driver WALIMLED100/24 1 x dimmer interface WDIMDALIHP Suspension 3 points at 120° 1 electrical cable 13' 3 adjustable metal cables length 9.8'

Codes

UZRC1610G15NBO
UZRC1610G15NNE
UZRC1610G15NOR


Structure

white
black
gold


Certificazioni




CIRCLE HOME 39.4"



CIRCLE HOME 59"

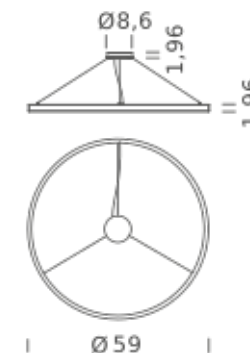

CIRCLE 78.7

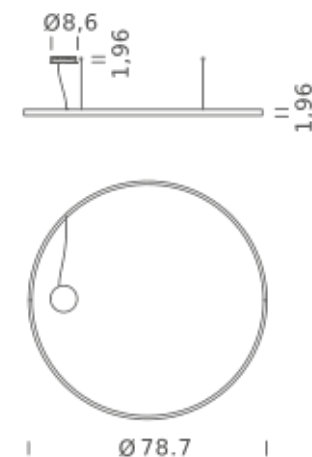

HOME 39.4" | UP-DOWNLIGHT - 2700K

LAMPING

Source	linear LED
Total power	90W
Emission	diffused
Switching	dimmable 0-10V
Tension	110/277V
Color temperature led	2700K
Luminous flux led	5231lm
Typ CRI	90
Ip class	IP40
Dimensions	ø39.4"x1.9"
Materials	aluminum
Notes	RAL 9005 black RAL 9016 white shipped assembled round canopy with 1 x driver WALIMLED100/24 1 x dimmer interface WDIMDALIHP Suspension 3 points at 120° 1 electrical cable 13' 3 adjustable metal cables length 9.8'

Codes

UZRC1710G15DBO
UZRC1710G15DNE
UZRC1710G15DOR


Structure

white
black
gold


Certificazioni




CIRCLE HOME 39.4"



CIRCLE HOME 59"

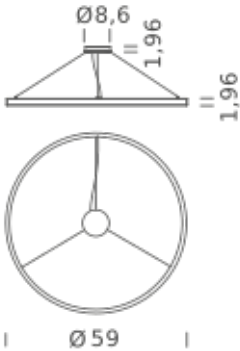

CIRCLE 78.7

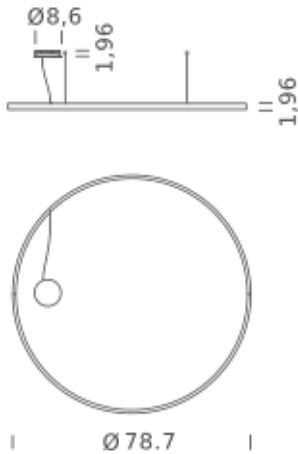

HOME 39.4" | UP-DOWNLIGHT - 3000K

LAMPING

Source	linear LED
Total power	90W
Emission	diffused
Switching	dimmable 0-10V
Tension	110/277V
Color temperature led	3000K
Luminous flux led	5539lm
Typ CRI	90
Ip class	IP40
Dimensions	ø39.4"x1.9"
Materials	aluminum
Notes	RAL 9005 black RAL 9016 white shipped assembled round canopy with 1 x driver WALIMLED100/24 1 x dimmer interface WDIMDALIHP Suspension 3 points at 120° 1 electrical cable 13' 3 adjustable metal cables length 9.8'

Codes

UZRC1710G15WBO
UZRC1710G15WNE
UZRC1710G15WOR


Structure

white
black
gold


Certificazioni




CIRCLE HOME 39.4"



CIRCLE HOME 59"

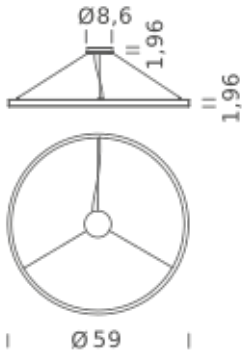

CIRCLE 78.7

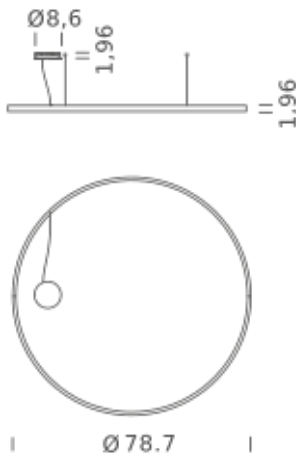

HOME 39.4" | UP-DOWNLIGHT - 4000K

LAMPING

Source	linear LED
Total power	90W
Emission	diffused
Switching	dimmable 0-10V
Tension	110/277V
Color temperature led	4000K
Luminous flux led	6154lm
Typ CRI	90
Ip class	IP40
Dimensions	ø39.4"x1.9"
Materials	aluminum
Notes	RAL 9005 black RAL 9016 white shipped assembled round canopy with 1 x driver WALIMLED100/24 1 x dimmer interface WDIMDALIHP Suspension 3 points at 120° 1 electrical cable 13' 3 adjustable metal cables length 9.8'

Codes

UZRC1710G15NBO
UZRC1710G15NNE
UZRC1710G15NOR


Structure

white
black
gold


Certificazioni




CIRCLE HOME 39.4"



CIRCLE HOME 59"

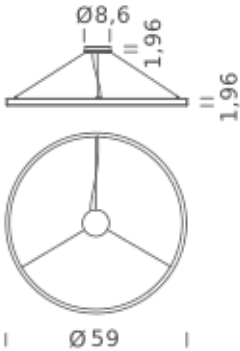

CIRCLE 78.7

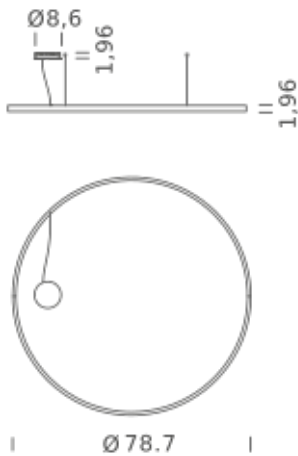

HOME 59" | DOWNLIGHT - 2700K

LAMPING

Source	linear LED
Total power	68W
Emission	diffused
Switching	dimmable 0-10V
Tension	110/277V
Color temperature led	2700K
Luminous flux led	3923lm
Typ CRI	90
Ip class	IP40
Dimensions	ø59"x1.9"
Materials	aluminum
Notes	RAL 9005 black RAL 9016 white shipped assembled round canopy with 1 x driver WALIMLED100/24 1 x dimmer interface WDIMDALIHP Suspension 3 points at 120° 1 electrical cable 13' 3 adjustable metal cables length 9.8'

Codes

UZRC1615G15DBO
UZRC1615G15DNE
UZRC1615G15DOR


Structure

white
black
gold


Certificazioni




CIRCLE HOME 39.4"



CIRCLE HOME 59"

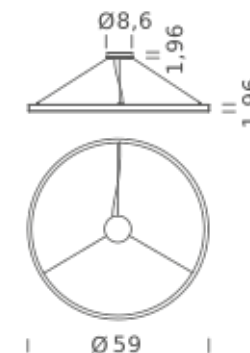

CIRCLE 78.7

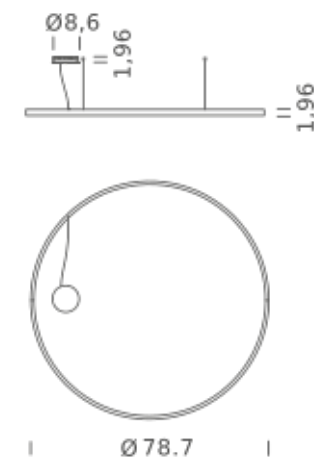

HOME 59" | DOWNLIGHT - 3000K

LAMPING

Source	linear LED
Total power	68W
Emission	diffused
Switching	dimmable 0-10V
Tension	110/277V
Color temperature led	3000K
Luminous flux led	4154lm
Typ CRI	90
Ip class	IP40
Dimensions	ø59"x1.9"
Materials	aluminum
Notes	RAL 9005 black RAL 9016 white shipped assembled round canopy with 1 x driver WALIMLED100/24 1 x dimmer interface WDIMDALIHP Suspension 3 points at 120° 1 electrical cable 13' 3 adjustable metal cables length 9.8'

Codes

UZRC1615G15WBO
UZRC1615G15WNE
UZRC1615G15WOR

Structure

white
black
gold


Certificazioni




CIRCLE HOME 39.4"



CIRCLE HOME 59"

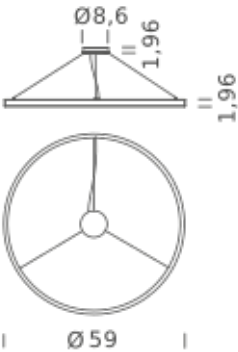

CIRCLE 78.7

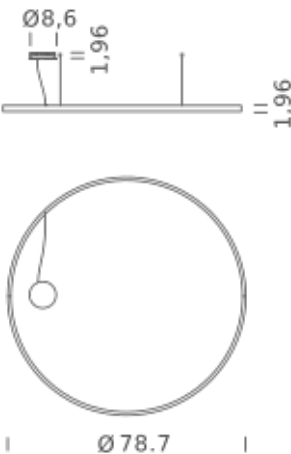

HOME 59" | DOWNLIGHT - 4000K

LAMPING

Source	linear LED
Total power	68W
Emission	diffused
Switching	dimmable 0-10V
Tension	110/277V
Color temperature led	4000K
Luminous flux led	4616lm
Typ CRI	90
Ip class	IP40
Dimensions	ø59"x1.9"
Materials	aluminum
Notes	RAL 9005 black RAL 9016 white shipped assembled round canopy with 1 x driver WALIMLED100/24 1 x dimmer interface WDIMDALIHP Suspension 3 points at 120° 1 electrical cable 13' 3 adjustable metal cables length 9.8'

Codes

UZRC1615G15NBO
UZRC1615G15NNE
UZRC1615G15NOR


Structure

white
black
gold


Certificazioni




CIRCLE HOME 39.4"



CIRCLE HOME 59"

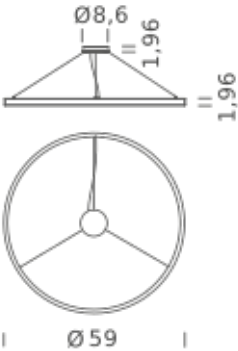

CIRCLE 78.7

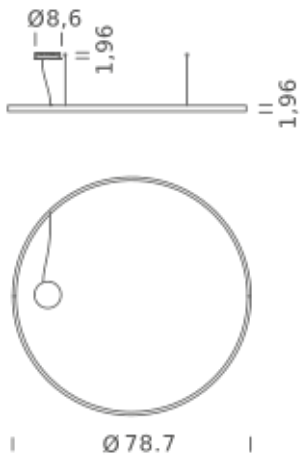

HOME 78.7" | DOWNLIGHT - 2700K

LAMPING

Source	linear LED
Total power	90W
Emission	diffused
Switching	dimmable 0-10V
Tension	110/277V
Color temperature led	2700K
Luminous flux led	5260lm
Typ CRI	90
Ip class	IP40
Dimensions	ø78.7"x1.9"
Materials	aluminum
Notes	Remote driver RAL 9005 black RAL 9016 white shipped in 2 pieces round canopy with 1 x driver WALIMLED100/24 1 x dimmer interface WDIMDALIHP 1 x electrical cable 16.4' 4 x adjustable metal cable length 9.8' (including ceiling attachment)

Codes

UZRC1620G15DBO
UZRC1620G15DNE
UZRC1620G15DOR


Structure

white
black
gold


Certificazioni




CIRCLE HOME 39.4"



CIRCLE HOME 59"

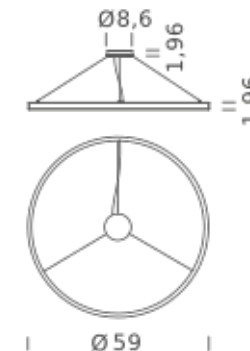

CIRCLE 78.7

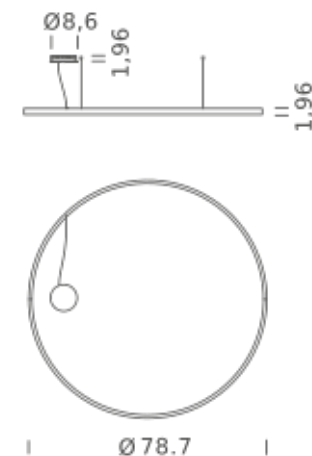

HOME 78.7" | DOWNLIGHT - 3000K

LAMPING

Source	linear LED
Total power	90W
Emission	diffused
Switching	dimmable 0-10V
Tension	110/277V
Color temperature led	3000K
Luminous flux led	5539lm
Typ CRI	90
Ip class	IP40
Dimensions	ø78.7"x1.9"
Materials	aluminum
Notes	Remote driver RAL 9005 black RAL 9016 white shipped in 2 pieces round canopy with 1 x driver WALIMLED100/24 1 x dimmer interface WDIMDALIHP 1 x electrical cable 16.4' 4 x adjustable metal cable length 9.8' (including ceiling attachment)

Codes

UZRC1620G15WBO
UZRC1620G15WNE
UZRC1620G15WOR


Structure

white
black
gold


Certificazioni




CIRCLE HOME 39.4"



CIRCLE HOME 59"

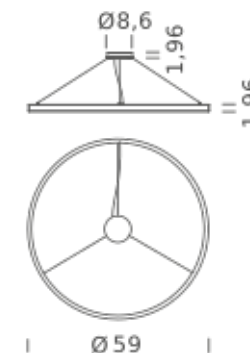

CIRCLE 78.7

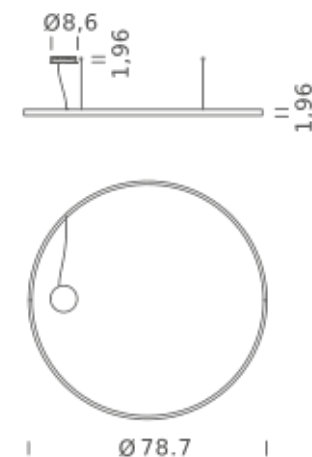

HOME 78.7" | DOWNLIGHT - 4000K

LAMPING

Source	linear LED
Total power	90W
Emission	diffused
Switching	dimmable 0-10V
Tension	110/277V
Color temperature led	4000K
Luminous flux led	6154lm
Typ CRI	90
Ip class	IP40
Dimensions	ø78.7"x1.9"
Materials	aluminum
Notes	Remote driver RAL 9005 black RAL 9016 white shipped in 2 pieces round canopy with 1 x driver WALIMLED100/24 1 x dimmer interface WDIMDALIHP 1 x electrical cable 16.4' 4 x adjustable metal cable length 9.8' (including ceiling attachment)

Codes

UZRC1620G15NBO

UZRC1620G15NNE

UZRC1620G15NOR

Structure

white


black

gold


Certificazioni



CIRCLE HOME 39.4"



CIRCLE HOME 59"

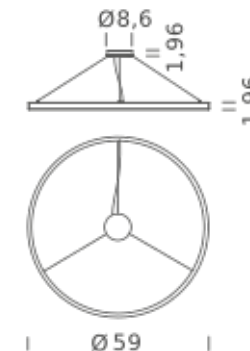

CIRCLE 78.7

