


ZIRKOL – S

ZIRKOL-S is a family of polygonal suspension lamps suitable for general and decorative lighting. Anodized aluminium body and opal screen for a homogeneous lighting.

Available as single direct light emission version with high flux and different colour temperatures. Driver and dimmer interface included.

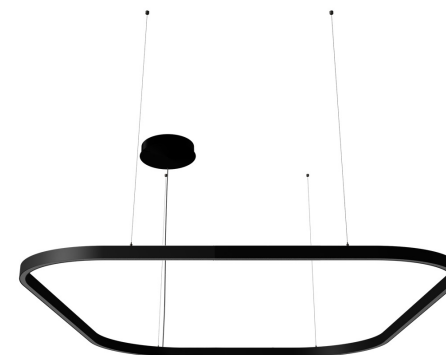

SQUARE 59"X59" | DOWNLIGHT - 2700K

LAMPING

Source	linear LED
Total power	77W
Emission	diffused
Switching	dimmable 0-10V
Tension	110/277V
Color temperature led	2700K
Luminous flux led	4432lm
Typ CRI	90
Ip class	IP40
Dimensions	59"x59"x1.9"
Materials	aluminum
Notes	RAL 9005 black RAL 9016 white shipped assembled round canopy with 1 x driver WALIMLED100/24 1 x dimmer interface WDIMDALIHP 1 x electrical cable 16.4' 4 x adjustable metal cable length 9.8' (including ceiling attachments)


Codes

UZRQ1606G15DBO
UZRQ1606G15DNE
UZRQ1606G15DOR

Structure

white
black
gold

Certificazioni

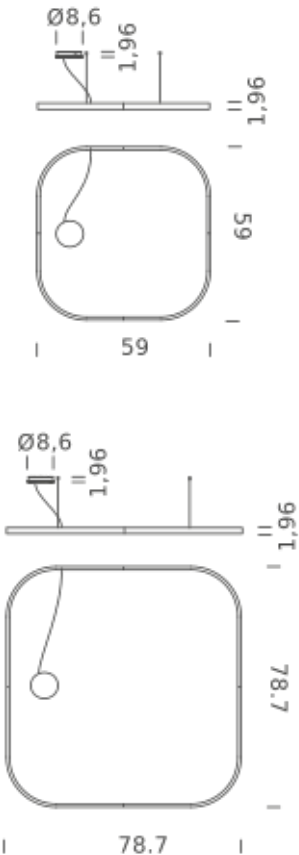

SQUARE 59"X59" | DOWNLIGHT - 3000K

LAMPING

Source	linear LED
Total power	77W
Emission	diffused
Switching	dimmable 0-10V
Tension	110/277V
Color temperature led	3000K
Luminous flux led	4692lm
Typ CRI	90
Ip class	IP40
Dimensions	59"x59"x1.9"
Materials	aluminum
Notes	RAL 9005 black RAL 9016 white shipped assembled round canopy with 1 x driver WALIMLED100/24 1 x dimmer interface WDIMDALIHP 1 x electrical cable 16.4' 4 x adjustable metal cable length 9.8' (including ceiling attachments)


Codes

UZRQ1606G15WBO
UZRQ1606G15WNE
UZRQ1606G15WOR

Structure

white
black
gold

Certificazioni

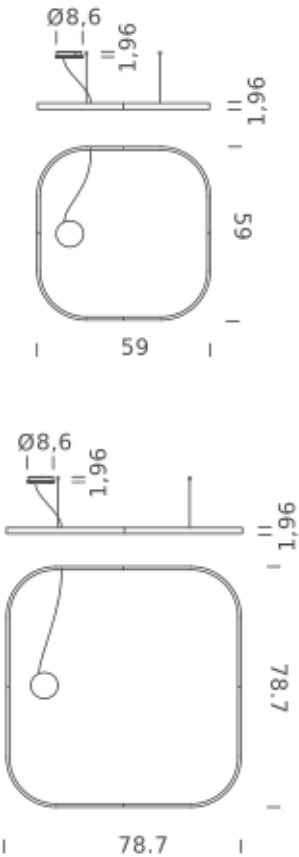

SQUARE 59"X59" | DOWNLIGHT - 4000K

LAMPING

Source	linear LED
Total power	77W
Emission	diffused
Switching	dimmable 0-10V
Tension	110/277V
Color temperature led	4000K
Luminous flux led	5214lm
Typ CRI	90
Ip class	IP40
Dimensions	59"x59"x1.9"
Materials	aluminum
Notes	RAL 9005 black RAL 9016 white shipped assembled round canopy with 1 x driver WALIMLED100/24 1 x dimmer interface WDIMDALIHP 1 x electrical cable 16.4' 4 x adjustable metal cable length 9.8' (including ceiling attachments)


Codes

UZRQ1606G15NBO
UZRQ1606G15NNE
UZRQ1606G15NOR

Structure

white
black
gold

Certificazioni

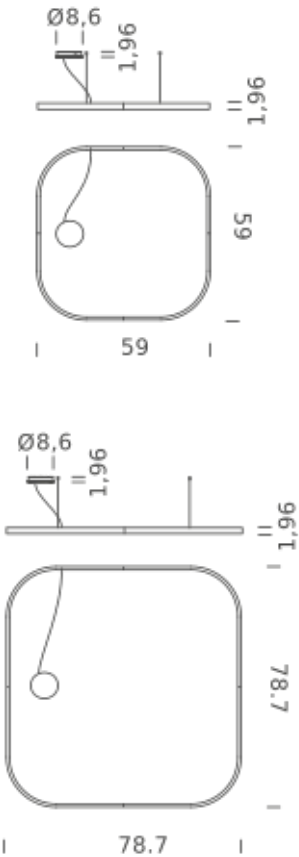

SQUARE 78.7"X78.7" | DOWNLIGHT - 2700K

LAMPING

Source	linear LED
Total power	100W
Emission	diffused
Switching	dimmable 0-10V
Tension	110/277V
Color temperature led	2700K
Luminous flux led	6098lm
Typ CRI	90
Ip class	IP40
Dimensions	78.7"x78.7"x1.9"
Materials	aluminum
Notes	RAL 9005 black RAL 9016 white shipped in 2 pieces round canopy with 1 x driver WALIMLED100/24 1 x dimmer interface WDIMDALIHP 1 x electrical cable 16.4' 4 x adjustable metal cable length 9.8' (including ceiling attachments)


Codes

UZRQ1608G15DBO
UZRQ1608G15DNE
UZRQ1608G15DOR

Structure

white
black
gold

Certificazioni

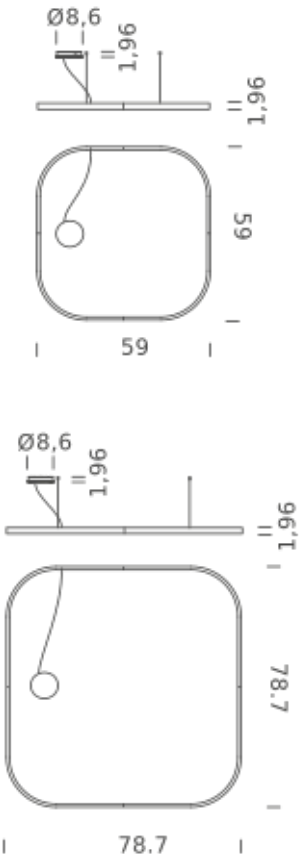

SQUARE 78.7"X78.7" | DOWNLIGHT - 3000K

LAMPING

Source	linear LED
Total power	100W
Emission	diffused
Switching	dimmable 0-10V
Tension	110/277V
Color temperature led	3000K
Luminous flux led	6456lm
Typ CRI	90
Ip class	IP40
Dimensions	78.7"x78.7"x1.9"
Materials	aluminum
Notes	RAL 9005 black RAL 9016 white shipped in 2 pieces round canopy with 1 x driver WALIMLED100/24 1 x dimmer interface WDIMDALIHP 1 x electrical cable 16.4' 4 x adjustable metal cable length 9.8' (including ceiling attachments)


Codes

UZRQ1608G15WBO
UZRQ1608G15WNE
UZRQ1608G15WOR

Structure

white
black
gold

Certificazioni

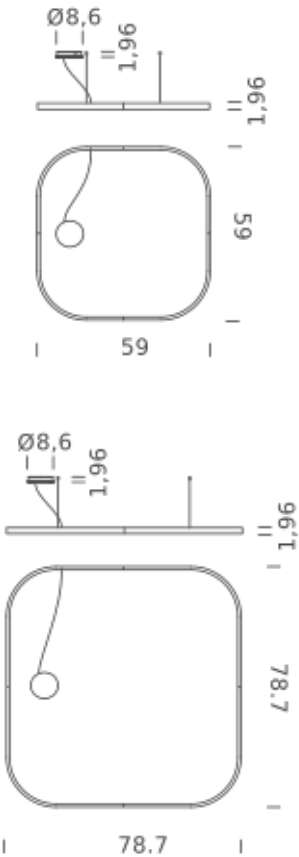

SQUARE 78.7"X78.7" | DOWNLIGHT - 4000K

LAMPING

Source	linear LED
Total power	100W
Emission	diffused
Switching	dimmable 0-10V
Tension	110/277V
Color temperature led	4000K
Luminous flux led	7174lm
Typ CRI	90
Ip class	IP40
Dimensions	78.7"x78.7"x1.9"
Materials	aluminum
Notes	RAL 9005 black RAL 9016 white shipped in 2 pieces round canopy with 1 x driver WALIMLED100/24 1 x dimmer interface WDIMDALIHP 1 x electrical cable 16.4' 4 x adjustable metal cable length 9.8' (including ceiling attachments)

Codes

UZRQ1608G15NBO
UZRQ1608G15NNE
UZRQ1608G15NOR

Structure

white
black
gold

Certificazioni

