


# UNTITLED READING CONE

*Bernhard Osann*

Eine definitive Synthese aus Mechanik und Lichttechnik, ein klares und essentielles Design mit miniaturisierten Gelenken, die eine extreme Bewegungsvermögen ermöglichen. Die Linear-Version wurde explizit mit Optik entworfen, um maximalen Sehkomfort in Arbeitsumgebungen zu gewährleisten.

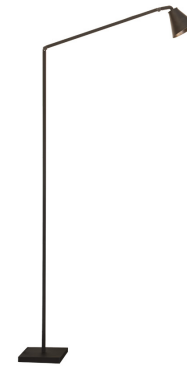

2700K

## LAMPING

|                   |                                                 |
|-------------------|-------------------------------------------------|
| Source            | LED spot                                        |
| Total power       | 6,5W                                            |
| Emission          | direct                                          |
| Switching         | dimmable on board                               |
| Tension           | 110-240V                                        |
| Color temperature | 2700K                                           |
| Luminous flux     | 395lm                                           |
| Typ CRI           | 90                                              |
| IP class          | 20                                              |
| Materials         | aluminum, technopolymer                         |
| Notes             | Cable length 2m, 40° optic, 155° joint rotation |
| Net lamp weight   | 5 kg                                            |

## Codes

UNT LN2 2C  
UNT LN2 2D


## Structure/Diffuser

black/gold  
black/black

## PACKAGE

|            |                                                |
|------------|------------------------------------------------|
| Package 01 | Dimension: 206x15x11 cm / Gross weight: 4,5 kg |
| Package 02 | Dimension: 24x20x8 cm / Gross weight: 1,5 kg   |

## Certificazioni

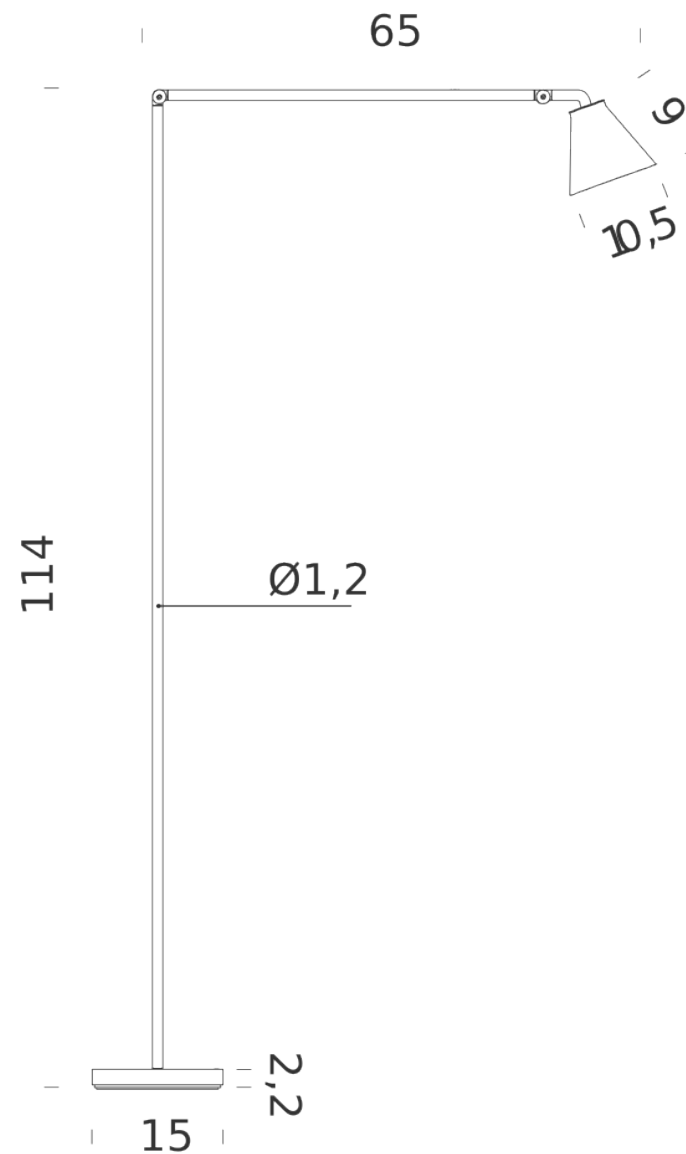

3000K

#### LAMPING

|                   |                                                 |
|-------------------|-------------------------------------------------|
| Source            | LED spot                                        |
| Total power       | 6,5W                                            |
| Emission          | direct                                          |
| Switching         | dimmable on board                               |
| Tension           | 110-240V                                        |
| Color temperature | 3000K                                           |
| Luminous flux     | 395lm                                           |
| Typ CRI           | 90                                              |
| IP class          | 20                                              |
| Materials         | aluminum, technopolymer                         |
| Notes             | Cable length 2m, 40° optic, 155° joint rotation |
| Net lamp weight   | 5 kg                                            |

#### Codes

UNT LNN 2C  
UNT LNN 2D

#### Structure/Diffuser

black/gold  
black/black

#### PACKAGE

|            |                                                |
|------------|------------------------------------------------|
| Package 01 | Dimension: 206x15x11 cm / Gross weight: 4,5 kg |
| Package 02 | Dimension: 24x20x8 cm / Gross weight: 1,5 kg   |

#### Certificazioni

