

# ZIRKOL CIRCLE

ZIRKOL C ist eine Familie von kreisförmigen Hängeleuchten, die sich ideal für die allgemeine und dekorative Beleuchtung von Räumen eignen.

Gehäuse aus eloxiertem Aluminium und Opalschutz für homogene Beleuchtung.

Direkte oder doppelte Lichtemission mit hohem Lichtstrom und mit drei verschiedenen Farbtemperaturen.

Fernnetzgerät und dimmer-Modul im Lieferumfang enthalten.



HOME Ø 0,85M | DOWNLIGHT - 2700K

LAMPING

|                       |                                                                                                                                                                                                                                                                                |
|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | linear LED                                                                                                                                                                                                                                                                     |
| Total power           | 35W                                                                                                                                                                                                                                                                            |
| Emission              | diffused orientable                                                                                                                                                                                                                                                            |
| Switching             | DALI 1-100%                                                                                                                                                                                                                                                                    |
| Tension               | 110-240V                                                                                                                                                                                                                                                                       |
| Color temperature     | 2700K                                                                                                                                                                                                                                                                          |
| Luminous flux         | 2000lm                                                                                                                                                                                                                                                                         |
| Typ CRI               | 90                                                                                                                                                                                                                                                                             |
| Energy class          | E                                                                                                                                                                                                                                                                              |
| IP class              | 40                                                                                                                                                                                                                                                                             |
| Dimensions            | ø85x5cm                                                                                                                                                                                                                                                                        |
| Materials             | Aluminium                                                                                                                                                                                                                                                                      |
| Notes                 | included: round canopy with 1 driver WALIMLED075/24,<br>1x dimmer interface WDIMDALIHP, 1 electrical cable 4m,<br>3x adjustable metal cables (length from 3m to 0,5m).<br>Shipped assembled   RAL 9005 black, RAL 9016 white<br>optional accessories and customizable features |
| Customization options |                                                                                                                                                                                                                                                                                |
| Accessories           | Canopy, for concrete ceiling                                                                                                                                                                                                                                                   |
| Net lamp weight       | 3 kg                                                                                                                                                                                                                                                                           |

Codes

BZRC1608G15DBO  
BZRC1608G15DNE  
BZRC1608G15DOR

Structure

white  
black  
matte gold


PACKAGE

Package 01      Dimension: 110x110x10,30 cm / Gross weight: 5,5 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

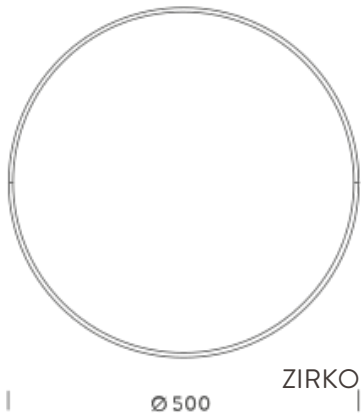

HOME Ø 0,85M | UP-DOWNLIGHT - 2700K

LAMPING

|                   |                                                                                                                                                                                                                              |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source            | linear LED                                                                                                                                                                                                                   |
| Total power       | 70W                                                                                                                                                                                                                          |
| Emission          | diffused orientable                                                                                                                                                                                                          |
| Switching         | DALI 1-100%                                                                                                                                                                                                                  |
| Tension           | 110-240V                                                                                                                                                                                                                     |
| Color temperature | 2700K                                                                                                                                                                                                                        |
| Luminous flux     | 4000K                                                                                                                                                                                                                        |
| Typ CRI           | 90                                                                                                                                                                                                                           |
| Energy class      | E                                                                                                                                                                                                                            |
| IP class          | 40                                                                                                                                                                                                                           |
| Dimensions        | ø85x5cm                                                                                                                                                                                                                      |
| Materials         | Aluminium                                                                                                                                                                                                                    |
| Notes             | included: round canopy with 1 driver WALIMLED075/24,<br>1x dimmer interface WDIMDALIHP, 1 electrical cable 4m,<br>3x adjustable metal cables (length from 3m to 0,5m).<br>Shipped assembled   RAL 9005 black, RAL 9016 white |
| Accessories       | Canopy, for concrete ceiling                                                                                                                                                                                                 |
| Net lamp weight   | 3 kg                                                                                                                                                                                                                         |

Codes

BZRC1708G15DBO  
BZRC1708G15DNE  
BZRC1708G15DOR

Structure

white  
black


PACKAGE

Package 01      Dimension: 110x110x10,30 cm / Gross weight: 5,5 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

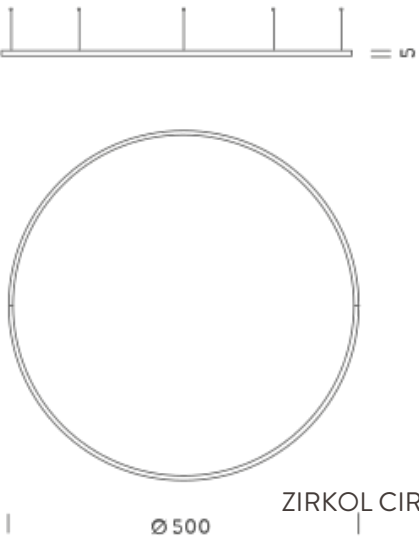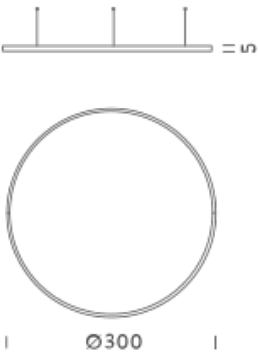

HOME Ø 0,85M | DOWNLIGHT - 3000K

LAMPING

|                   |                                                                                                                                                                                                                              |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source            | linear LED                                                                                                                                                                                                                   |
| Total power       | 35W                                                                                                                                                                                                                          |
| Emission          | diffused orientable                                                                                                                                                                                                          |
| Switching         | DALI 1-100%                                                                                                                                                                                                                  |
| Tension           | 110-240V                                                                                                                                                                                                                     |
| Color temperature | 3000K                                                                                                                                                                                                                        |
| Luminous flux     | 2200lm                                                                                                                                                                                                                       |
| Typ CRI           | 90                                                                                                                                                                                                                           |
| Energy class      | E                                                                                                                                                                                                                            |
| IP class          | 40                                                                                                                                                                                                                           |
| Dimensions        | ø85x5cm                                                                                                                                                                                                                      |
| Materials         | Aluminium                                                                                                                                                                                                                    |
| Notes             | included: round canopy with 1 driver WALIMLED075/24,<br>1x dimmer interface WDIMDALIHP, 1 electrical cable 4m,<br>3x adjustable metal cables (length from 3m to 0,5m).<br>Shipped assembled   RAL 9005 black, RAL 9016 white |
| Accessories       | Canopy, for concrete ceiling                                                                                                                                                                                                 |
| Net lamp weight   | 3 kg                                                                                                                                                                                                                         |

Codes

BZRC1608G15WBO  
BZRC1608G15WNE  
BZRC1608G15WOR

Structure

white  
black  
matte gold


PACKAGE

Package 01      Dimension: 110x110x10,30 cm / Gross weight: 5,5 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

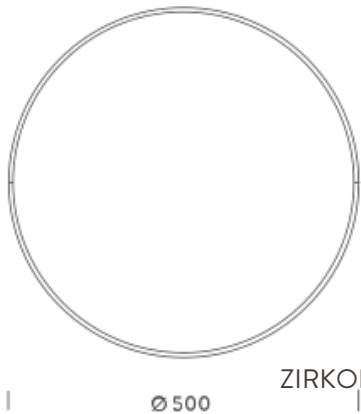

HOME Ø 0,85M | UP-DOWNLIGHT - 3000K

LAMPING

|                   |                                                                                                                                                                                                                              |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source            | linear LED                                                                                                                                                                                                                   |
| Total power       | 70W                                                                                                                                                                                                                          |
| Emission          | diffused orientable                                                                                                                                                                                                          |
| Switching         | DALI 1-100%                                                                                                                                                                                                                  |
| Tension           | 110-240V                                                                                                                                                                                                                     |
| Color temperature | 3000K                                                                                                                                                                                                                        |
| Luminous flux     | 4400lm                                                                                                                                                                                                                       |
| Typ CRI           | 90                                                                                                                                                                                                                           |
| Energy class      | E                                                                                                                                                                                                                            |
| IP class          | 40                                                                                                                                                                                                                           |
| Dimensions        | ø85x5cm                                                                                                                                                                                                                      |
| Materials         | Aluminium                                                                                                                                                                                                                    |
| Notes             | included: round canopy with 1 driver WALIMLED075/24,<br>1x dimmer interface WDIMDALIHP, 1 electrical cable 4m,<br>3x adjustable metal cables (length from 3m to 0,5m).<br>Shipped assembled   RAL 9005 black, RAL 9016 white |
| Accessories       | Canopy, for concrete ceiling                                                                                                                                                                                                 |
| Net lamp weight   | 3 kg                                                                                                                                                                                                                         |

Codes

BZRC1708G15WBO  
BZRC1708G15WNE  
BZRC1708G15WOR

Structure

white  
black  
matte gold


PACKAGE

Package 01      Dimension: 110x110x10,30 cm / Gross weight: 5,5 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

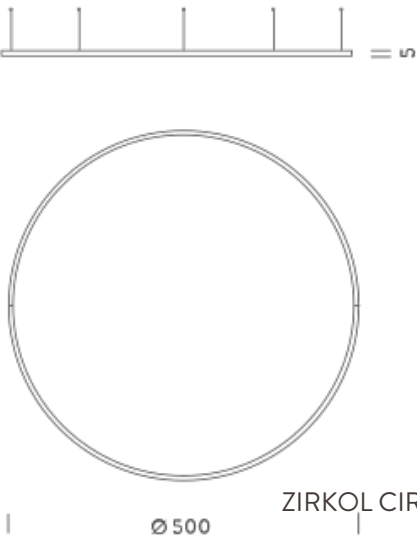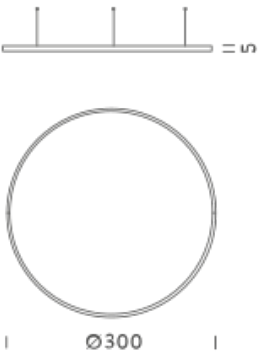

HOME Ø 0,85M | DOWNLIGHT - 4000K

LAMPING

|                   |                                                                                                                                                                                                                              |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source            | linear LED                                                                                                                                                                                                                   |
| Total power       | 35W                                                                                                                                                                                                                          |
| Emission          | diffused orientable                                                                                                                                                                                                          |
| Switching         | DALI 1-100%                                                                                                                                                                                                                  |
| Tension           | 110-240V                                                                                                                                                                                                                     |
| Color temperature | 4000K                                                                                                                                                                                                                        |
| Luminous flux     | 2360lm                                                                                                                                                                                                                       |
| Typ CRI           | 90                                                                                                                                                                                                                           |
| Energy class      | D                                                                                                                                                                                                                            |
| IP class          | 40                                                                                                                                                                                                                           |
| Dimensions        | ø85x5cm                                                                                                                                                                                                                      |
| Materials         | Aluminium                                                                                                                                                                                                                    |
| Notes             | included: round canopy with 1 driver WALIMLED075/24,<br>1x dimmer interface WDIMDALIHP, 1 electrical cable 4m,<br>3x adjustable metal cables (length from 3m to 0,5m).<br>Shipped assembled   RAL 9005 black, RAL 9016 white |
| Accessories       | Canopy, for concrete ceiling                                                                                                                                                                                                 |
| Net lamp weight   | 3 kg                                                                                                                                                                                                                         |

Codes

BZRC1608G15NBO  
BZRC1608G15NNE  
BZRC1608G15NOR

Structure

white  
black  
matte gold


PACKAGE

Package 01      Dimension: 110x110x10,30 cm / Gross weight: 5,5 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

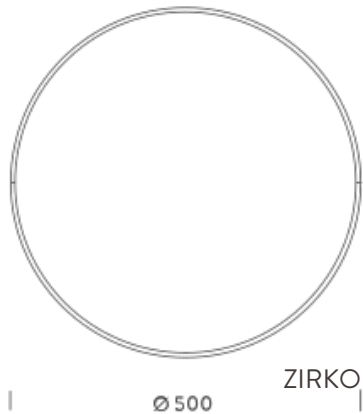

HOME Ø 0,85M | UP-DOWNLIGHT - 4000K

LAMPING

|                   |                                                                                                                                                                                                                              |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source            | linear LED                                                                                                                                                                                                                   |
| Total power       | 70W                                                                                                                                                                                                                          |
| Emission          | diffused orientable                                                                                                                                                                                                          |
| Switching         | DALI 1-100%                                                                                                                                                                                                                  |
| Tension           | 110-240V                                                                                                                                                                                                                     |
| Color temperature | 4000K                                                                                                                                                                                                                        |
| Luminous flux     | 4720lm                                                                                                                                                                                                                       |
| Typ CRI           | 90                                                                                                                                                                                                                           |
| Energy class      | D                                                                                                                                                                                                                            |
| IP class          | 40                                                                                                                                                                                                                           |
| Dimensions        | ø85x5cm                                                                                                                                                                                                                      |
| Materials         | Aluminium                                                                                                                                                                                                                    |
| Notes             | included: round canopy with 1 driver WALIMLED075/24,<br>1x dimmer interface WDIMDALIHP, 1 electrical cable 4m,<br>3x adjustable metal cables (length from 3m to 0,5m).<br>Shipped assembled   RAL 9005 black, RAL 9016 white |
| Accessories       | Canopy, for concrete ceiling                                                                                                                                                                                                 |
| Net lamp weight   | 3 kg                                                                                                                                                                                                                         |

Codes

BZRC1708G15NBO  
BZRC1708G15NNE  
BZRC1708G15NOR

Structure

white  
black  
matte gold


PACKAGE

Package 01      Dimension: 110x110x10,30 cm / Gross weight: 5,5 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

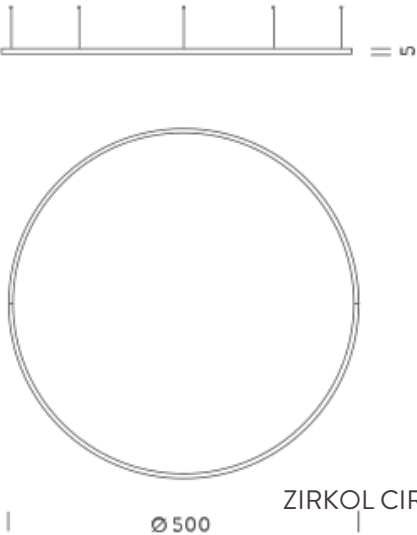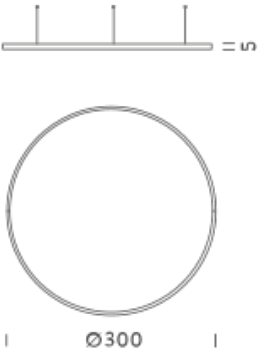

HOME Ø 1M | DOWNLIGHT - 2700K

LAMPING

|                       |                                                                                                                                                                                             |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                                  |
| Total power           | 45W                                                                                                                                                                                         |
| Emission              | Diffused orientable                                                                                                                                                                         |
| Switching             | DALI 1-100%                                                                                                                                                                                 |
| Tension               | 110/240V                                                                                                                                                                                    |
| Color temperature     | 2700K                                                                                                                                                                                       |
| Luminous flux         | 2616lm                                                                                                                                                                                      |
| Typ CRI               | 90                                                                                                                                                                                          |
| Energy class          | E                                                                                                                                                                                           |
| IP class              | 40                                                                                                                                                                                          |
| Dimensions            | ø100x5cm                                                                                                                                                                                    |
| Materials             | Aluminium                                                                                                                                                                                   |
| Notes                 | included: round canopy with 1 driver WALIMLED100/24,<br>1x dimmer interface WDIMDALIHP, 1 electrical cable 4m,<br>3x adjustable metal cables (length from 3m to 0,5m).<br>Shipped assembled |
| Customization options | Shapes, sizes                                                                                                                                                                               |
| Accessories           | Canopy, for concrete ceiling   Ceiling attachment, for<br>metal cable   Ceiling plate, for false ceiling                                                                                    |
| Net lamp weight       | 4 kg                                                                                                                                                                                        |

Codes

BZRC1610G15DBO  
BZRC1610G15DNE  
BZRC1610G15DOR

PACKAGE

Package 01

Certificazioni




NEMO

Structure




white  
black  
matte gold

Dimension: 110x110x15 cm / Gross weight: 6,5 kg

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

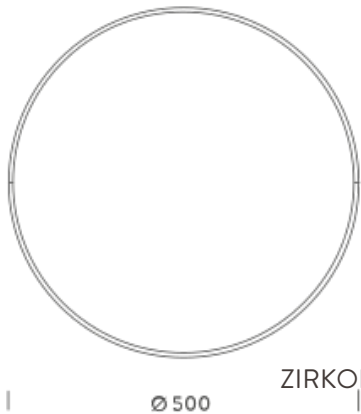



HOME Ø 1M | UP - DOWNLIGHT - 2700K

LAMPING

|                       |                                                                                                                                                                                             |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                                  |
| Total power           | 90W                                                                                                                                                                                         |
| Emission              | Diffused orientable                                                                                                                                                                         |
| Switching             | DALI 1-100%                                                                                                                                                                                 |
| Tension               | 110/240V                                                                                                                                                                                    |
| Color temperature     | 2700K                                                                                                                                                                                       |
| Luminous flux         | 5231lm                                                                                                                                                                                      |
| Typ CRI               | 90                                                                                                                                                                                          |
| Energy class          | E                                                                                                                                                                                           |
| IP class              | 40                                                                                                                                                                                          |
| Dimensions            | ø100x5cm                                                                                                                                                                                    |
| Materials             | Aluminium                                                                                                                                                                                   |
| Notes                 | included: round canopy with 1 driver WALIMLED100/24,<br>1x dimmer interface WDIMDALIHP, 1 electrical cable 4m,<br>3x adjustable metal cables (length from 3m to 0,5m).<br>Shipped assembled |
| Customization options | Shapes, sizes                                                                                                                                                                               |
| Accessories           | Canopy, for concrete ceiling   Ceiling attachment, for<br>metal cable   Ceiling plate, for false ceiling                                                                                    |
| Net lamp weight       | 4 kg                                                                                                                                                                                        |

Codes

BZRC1710G15DBO  
BZRC1710G15DNE  
BZRC1710G15DOR

PACKAGE

Package 01

Certificazioni




NEMO

Structure




white  
black  
matte gold

Dimension: 110x110x15 cm / Gross weight: 6,5 kg

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

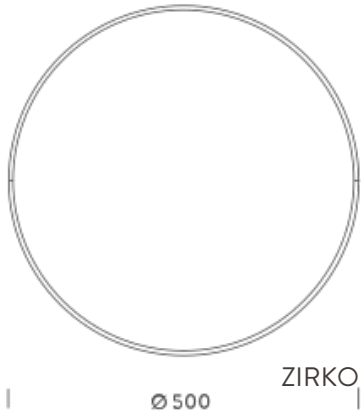

# HOME Ø 1M | DOWNLIGHT - 3000K

## LAMPING

|                       |                                                                                                                                                                                             |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                                  |
| Total power           | 45W                                                                                                                                                                                         |
| Emission              | Diffused orientable                                                                                                                                                                         |
| Switching             | DALI 1-100%                                                                                                                                                                                 |
| Tension               | 110/240V                                                                                                                                                                                    |
| Color temperature     | 3000K                                                                                                                                                                                       |
| Luminous flux         | 2769lm                                                                                                                                                                                      |
| Typ CRI               | 90                                                                                                                                                                                          |
| Energy class          | E                                                                                                                                                                                           |
| IP class              | 40                                                                                                                                                                                          |
| Dimensions            | ø100x5cm                                                                                                                                                                                    |
| Materials             | Aluminium                                                                                                                                                                                   |
| Notes                 | included: round canopy with 1 driver WALIMLED100/24,<br>1x dimmer interface WDIMDALIHP, 1 electrical cable 4m,<br>3x adjustable metal cables (length from 3m to 0,5m).<br>Shipped assembled |
| Customization options | Shapes, sizes                                                                                                                                                                               |
| Accessories           | Canopy, for concrete ceiling   Ceiling attachment, for<br>metal cable   Ceiling plate, for false ceiling                                                                                    |
| Net lamp weight       | 4 kg                                                                                                                                                                                        |

## Codes

BZRC1610G15WBO  
BZRC1610G15WNE  
BZRC1610G15WOR

## PACKAGE

Package 01

## Certificazioni




NEMO

## Structure




white  
black  
matte gold

Dimension: 110x110x15 cm / Gross weight: 6,5 kg

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

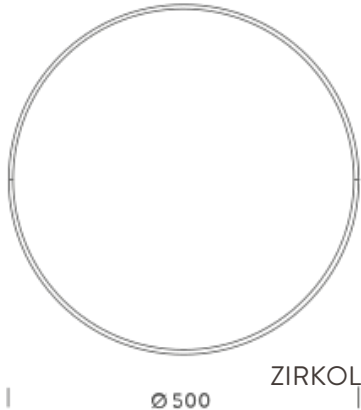

# HOME Ø 1M | UP - DOWNLIGHT - 3000K

## LAMPING

|                       |                                                                                                                                                                                             |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                                  |
| Total power           | 90W                                                                                                                                                                                         |
| Emission              | Diffused orientable                                                                                                                                                                         |
| Switching             | DALI 1-100%                                                                                                                                                                                 |
| Tension               | 110/240V                                                                                                                                                                                    |
| Color temperature     | 3000K                                                                                                                                                                                       |
| Luminous flux         | 5539lm                                                                                                                                                                                      |
| Typ CRI               | 90                                                                                                                                                                                          |
| Energy class          | E                                                                                                                                                                                           |
| IP class              | 40                                                                                                                                                                                          |
| Dimensions            | ø100x5cm                                                                                                                                                                                    |
| Materials             | Aluminium                                                                                                                                                                                   |
| Notes                 | included: round canopy with 1 driver WALIMLED100/24,<br>1x dimmer interface WDIMDALIHP, 1 electrical cable 4m,<br>3x adjustable metal cables (length from 3m to 0,5m).<br>Shipped assembled |
| Customization options | Shapes, sizes                                                                                                                                                                               |
| Accessories           | Canopy, for concrete ceiling   Ceiling attachment, for<br>metal cable   Ceiling plate, for false ceiling                                                                                    |
| Net lamp weight       | 4 kg                                                                                                                                                                                        |

## Codes

BZRC1710G15WBO  
BZRC1710G15WNE  
BZRC1710G15WOR

## PACKAGE

Package 01

## Certificazioni




NEMO

## Structure




white  
black  
matte gold

Dimension: 110x110x15 cm / Gross weight: 6,5 kg

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

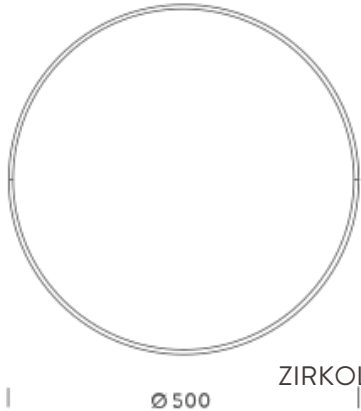

HOME Ø 1M | DOWNLIGHT - 4000K

LAMPING

|                       |                                                                                                                                                                                             |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                                  |
| Total power           | 45W                                                                                                                                                                                         |
| Emission              | Diffused orientable                                                                                                                                                                         |
| Switching             | DALI 1-100%                                                                                                                                                                                 |
| Tension               | 110/240V                                                                                                                                                                                    |
| Color temperature     | 4000K                                                                                                                                                                                       |
| Luminous flux         | 3077lm                                                                                                                                                                                      |
| Typ CRI               | 90                                                                                                                                                                                          |
| Energy class          | D                                                                                                                                                                                           |
| IP class              | 40                                                                                                                                                                                          |
| Dimensions            | ø100x5cm                                                                                                                                                                                    |
| Materials             | Aluminium                                                                                                                                                                                   |
| Notes                 | included: round canopy with 1 driver WALIMLED100/24,<br>1x dimmer interface WDIMDALIHP, 1 electrical cable 4m,<br>3x adjustable metal cables (length from 3m to 0,5m).<br>Shipped assembled |
| Customization options | Shapes, sizes                                                                                                                                                                               |
| Accessories           | Canopy, for concrete ceiling   Ceiling attachment, for<br>metal cable   Ceiling plate, for false ceiling                                                                                    |
| Net lamp weight       | 4 kg                                                                                                                                                                                        |

Codes  
BZRC1610G15NBO  
BZRC1610G15NNE  
BZRC1610G15NOR


PACKAGE

Package 01  
Dimension: 110x110x15 cm / Gross weight: 6,5 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

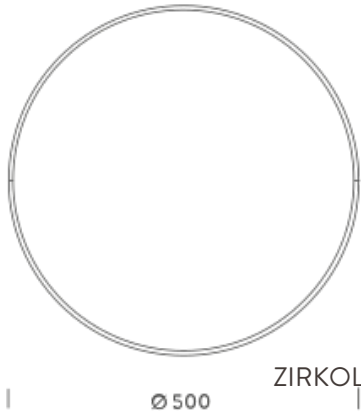

HOME Ø 1M | UP - DOWNLIGHT - 4000K

LAMPING

|                       |                                                                                                                                                                                             |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                                  |
| Total power           | 90W                                                                                                                                                                                         |
| Emission              | Diffused orientable                                                                                                                                                                         |
| Switching             | DALI 1-100%                                                                                                                                                                                 |
| Tension               | 110/240V                                                                                                                                                                                    |
| Color temperature     | 4000K                                                                                                                                                                                       |
| Luminous flux         | 6154lm                                                                                                                                                                                      |
| Typ CRI               | 90                                                                                                                                                                                          |
| Energy class          | D                                                                                                                                                                                           |
| IP class              | 40                                                                                                                                                                                          |
| Dimensions            | ø100x5cm                                                                                                                                                                                    |
| Materials             | Aluminium                                                                                                                                                                                   |
| Notes                 | included: round canopy with 1 driver WALIMLED100/24,<br>1x dimmer interface WDIMDALIHP, 1 electrical cable 4m,<br>3x adjustable metal cables (length from 3m to 0,5m).<br>Shipped assembled |
| Customization options | Shapes, sizes                                                                                                                                                                               |
| Accessories           | Canopy, for concrete ceiling   Ceiling attachment, for<br>metal cable   Ceiling plate, for false ceiling                                                                                    |
| Net lamp weight       | 4 kg                                                                                                                                                                                        |

Codes

BZRC1710G15NBO  
BZRC1710G15NNE  
BZRC1710G15NOR

Structure

white  
black  
matte gold


PACKAGE

Package 01  
Dimension: 110x110x15 cm / Gross weight: 6,5 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

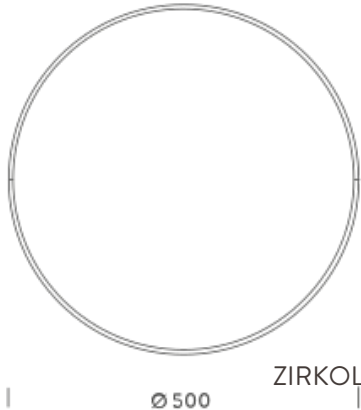

# HOME Ø 1,5M | DOWNLIGHT - 2700K

## LAMPING

|                       |                                                                                                                                                                                             |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                                  |
| Total power           | 68W                                                                                                                                                                                         |
| Emission              | Diffused orientable                                                                                                                                                                         |
| Switching             | DALI 1-100%                                                                                                                                                                                 |
| Tension               | 110/240V                                                                                                                                                                                    |
| Color temperature     | 2700K                                                                                                                                                                                       |
| Luminous flux         | 3923lm                                                                                                                                                                                      |
| Typ CRI               | 90                                                                                                                                                                                          |
| Energy class          | E                                                                                                                                                                                           |
| IP class              | 40                                                                                                                                                                                          |
| Dimensions            | ø150x5cm                                                                                                                                                                                    |
| Materials             | Aluminium                                                                                                                                                                                   |
| Notes                 | included: round canopy with 1 driver WALIMLED100/24,<br>1x dimmer interface WDIMDALIHP, 1 electrical cable 4m,<br>3x adjustable metal cables (length from 3m to 0,5m).<br>Shipped assembled |
| Customization options | Shapes, sizes                                                                                                                                                                               |
| Accessories           | Canopy, for concrete ceiling   Ceiling attachment, for<br>metal cable   Ceiling plate, for false ceiling                                                                                    |
| Net lamp weight       | 4 kg                                                                                                                                                                                        |

## Codes

BZRC1615G15DBO  
BZRC1615G15DNE  
BZRC1615G15DOR

## PACKAGE

Package 01

## Certificazioni




NEMO

## Structure




white  
black  
matte gold

Dimension: 160x160x15 cm / Gross weight: 6,5 kg

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

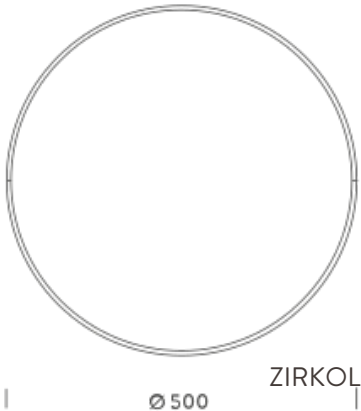

HOME Ø 1,5M | UP - DOWNLIGHT - 2700K

LAMPING

|                       |                                                                                                                                                                                             |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                                  |
| Total power           | 136W                                                                                                                                                                                        |
| Emission              | Diffused orientable                                                                                                                                                                         |
| Switching             | DALI 1-100%                                                                                                                                                                                 |
| Tension               | 220/240V                                                                                                                                                                                    |
| Color temperature     | 2700K                                                                                                                                                                                       |
| Luminous flux         | 7847lm                                                                                                                                                                                      |
| Typ CRI               | 90                                                                                                                                                                                          |
| Energy class          | E                                                                                                                                                                                           |
| IP class              | 40                                                                                                                                                                                          |
| Dimensions            | ø150x5cm                                                                                                                                                                                    |
| Materials             | Aluminium                                                                                                                                                                                   |
| Notes                 | included: round canopy with 1 driver WALIM150/24VIN,<br>1x dimmer interface WDIMDALIHP, 1 electrical cable 4m,<br>3x adjustable metal cables (length from 3m to 0,5m).<br>Shipped assembled |
| Customization options | Shapes, sizes                                                                                                                                                                               |
| Accessories           | Canopy, for concrete ceiling   Ceiling attachment, for<br>metal cable   Ceiling plate, for false ceiling                                                                                    |
| Net lamp weight       | 5,4 kg                                                                                                                                                                                      |

Codes

BZRC1715G15DBO  
BZRC1715G15DNE  
BZRC1715G15DOR

PACKAGE

Package 01

Certificazioni




NEMO

Structure




white  
black  
matte gold

Dimension: 160x160x15 cm / Gross weight: 8,9 kg

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

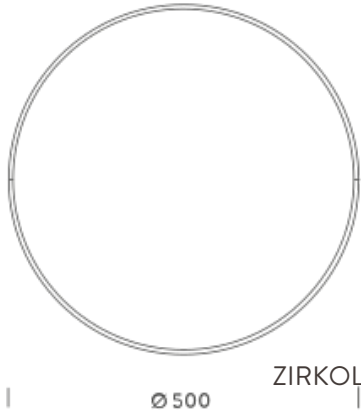

HOME Ø 1,5M | DOWNLIGHT - 3000K

LAMPING

|                       |                                                                                                                                                                                             |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                                  |
| Total power           | 68W                                                                                                                                                                                         |
| Emission              | Diffused orientable                                                                                                                                                                         |
| Switching             | DALI 1-100%                                                                                                                                                                                 |
| Tension               | 110/240V                                                                                                                                                                                    |
| Color temperature     | 3000K                                                                                                                                                                                       |
| Luminous flux         | 4154lm                                                                                                                                                                                      |
| Typ CRI               | 90                                                                                                                                                                                          |
| Energy class          | E                                                                                                                                                                                           |
| IP class              | 40                                                                                                                                                                                          |
| Dimensions            | ø150x5cm                                                                                                                                                                                    |
| Materials             | Aluminium                                                                                                                                                                                   |
| Notes                 | included: round canopy with 1 driver WALIMLED100/24,<br>1x dimmer interface WDIMDALIHP, 1 electrical cable 4m,<br>3x adjustable metal cables (length from 3m to 0,5m).<br>Shipped assembled |
| Customization options | Shapes, sizes                                                                                                                                                                               |
| Accessories           | Canopy, for concrete ceiling   Ceiling attachment, for<br>metal cable   Ceiling plate, for false ceiling                                                                                    |
| Net lamp weight       | 5,4 kg                                                                                                                                                                                      |

Codes  
BZRC1615G15WBO  
BZRC1615G15WNE  
BZRC1615G15WOR


PACKAGE

Package 01  
Dimension: 160x160x15 cm / Gross weight: 8,9 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

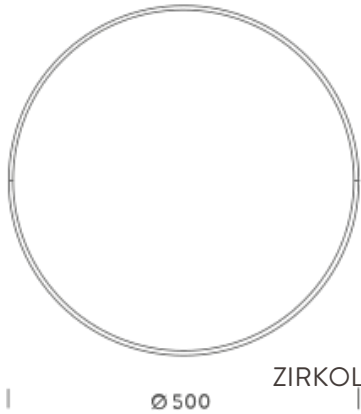



# HOME Ø 1,5M | UP - DOWNLIGHT - 3000K

## LAMPING

|                       |                                                                                                                                                                                             |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                                  |
| Total power           | 136W                                                                                                                                                                                        |
| Emission              | Diffused orientable                                                                                                                                                                         |
| Switching             | DALI 1-100%                                                                                                                                                                                 |
| Tension               | 220/240V                                                                                                                                                                                    |
| Color temperature     | 3000K                                                                                                                                                                                       |
| Luminous flux         | 8308lm                                                                                                                                                                                      |
| Typ CRI               | 90                                                                                                                                                                                          |
| Energy class          | E                                                                                                                                                                                           |
| IP class              | 40                                                                                                                                                                                          |
| Dimensions            | ø150x5cm                                                                                                                                                                                    |
| Materials             | Aluminium                                                                                                                                                                                   |
| Notes                 | included: round canopy with 1 driver WALIM150/24VIN,<br>1x dimmer interface WDIMDALIHP, 1 electrical cable 4m,<br>3x adjustable metal cables (length from 3m to 0,5m).<br>Shipped assembled |
| Customization options | Shapes, sizes                                                                                                                                                                               |
| Accessories           | Canopy, for concrete ceiling   Ceiling attachment, for<br>metal cable   Ceiling plate, for false ceiling                                                                                    |
| Net lamp weight       | 5,4 kg                                                                                                                                                                                      |

## Codes

BZRC1715G15WBO  
BZRC1715G15WNE  
BZRC1715G15WOR

## Structure

white  
black  
matte gold

## PACKAGE


Package 01  
Dimension: 160x160x15 cm / Gross weight: 8,9 kg

## Certificazioni






NEMO

## CIRCLE HOME 0,85-1-1,5m



## CIRCLE 2-3-5m

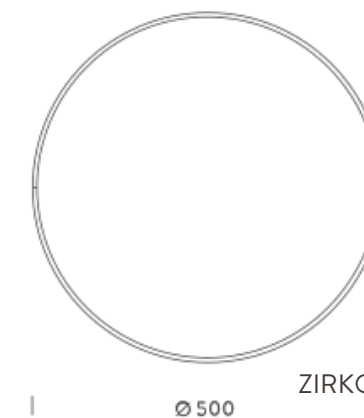

# HOME Ø 1,5M | DOWNLIGHT - 4000K

## LAMPING

|                       |                                                                                                                                                                                             |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                                  |
| Total power           | 68W                                                                                                                                                                                         |
| Emission              | Diffused orientable                                                                                                                                                                         |
| Switching             | DALI 1-100%                                                                                                                                                                                 |
| Tension               | 110/240V                                                                                                                                                                                    |
| Color temperature     | 4000K                                                                                                                                                                                       |
| Luminous flux         | 4616lm                                                                                                                                                                                      |
| Typ CRI               | 90                                                                                                                                                                                          |
| Energy class          | D                                                                                                                                                                                           |
| IP class              | 40                                                                                                                                                                                          |
| Dimensions            | ø150x5cm                                                                                                                                                                                    |
| Materials             | Aluminium                                                                                                                                                                                   |
| Notes                 | included: round canopy with 1 driver WALIMLED100/24,<br>1x dimmer interface WDIMDALIHP, 1 electrical cable 4m,<br>3x adjustable metal cables (length from 3m to 0,5m).<br>Shipped assembled |
| Customization options | Shapes, sizes                                                                                                                                                                               |
| Accessories           | Canopy, for concrete ceiling   Ceiling attachment, for<br>metal cable   Ceiling plate, for false ceiling                                                                                    |
| Net lamp weight       | 5,4 kg                                                                                                                                                                                      |

## Codes

BZRC1615G15NBO  
BZRC1615G15NNE  
BZRC1615G15NOR

## Structure

white  
black  
matte gold

## PACKAGE


Package 01  
Dimension: 160x160x15 cm / Gross weight: 8,9 kg

## Certificazioni






NEMO

## CIRCLE HOME 0,85-1-1,5m



## CIRCLE 2-3-5m

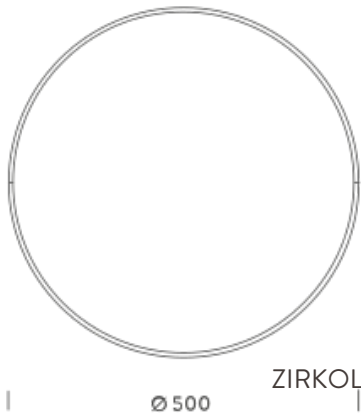

HOME Ø 1,5M | UP - DOWNLIGHT - 4000K

LAMPING

|                       |                                                                                                                                                                                             |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                                  |
| Total power           | 136W                                                                                                                                                                                        |
| Emission              | Diffused orientable                                                                                                                                                                         |
| Switching             | DALI 1-100%                                                                                                                                                                                 |
| Tension               | 220/240V                                                                                                                                                                                    |
| Color temperature     | 4000K                                                                                                                                                                                       |
| Luminous flux         | 9232lm                                                                                                                                                                                      |
| Typ CRI               | 90                                                                                                                                                                                          |
| Energy class          | D                                                                                                                                                                                           |
| IP class              | 40                                                                                                                                                                                          |
| Dimensions            | ø150x5cm                                                                                                                                                                                    |
| Materials             | Aluminium                                                                                                                                                                                   |
| Notes                 | included: round canopy with 1 driver WALIM150/24VIN,<br>1x dimmer interface WDIMDALIHP, 1 electrical cable 4m,<br>3x adjustable metal cables (length from 3m to 0,5m).<br>Shipped assembled |
| Customization options | Shapes, sizes                                                                                                                                                                               |
| Accessories           | Canopy, for concrete ceiling   Ceiling attachment, for<br>metal cable   Ceiling plate, for false ceiling                                                                                    |
| Net lamp weight       | 5,4 kg                                                                                                                                                                                      |

Codes

BZRC1715G15NBO  
BZRC1715G15NNE  
BZRC1715G15NOR

Structure

white  
black  
matte gold

PACKAGE


Package 01  
Dimension: 160x160x15 cm / Gross weight: 8,9 kg

Certificazioni






NEMO

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

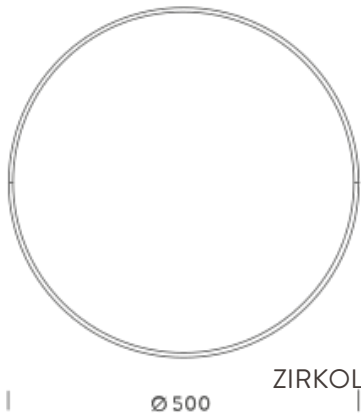

Ø 2M | DOWNLIGHT - 2700K

LAMPING

|                       |                                                                                                                                                                             |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                  |
| Total power           | 90W                                                                                                                                                                         |
| Emission              | Diffused orientable                                                                                                                                                         |
| Switching             | DALI 1-100%                                                                                                                                                                 |
| Tension               | 100/240V                                                                                                                                                                    |
| Color temperature     | 2700K                                                                                                                                                                       |
| Luminous flux         | 5260lm                                                                                                                                                                      |
| Typ CRI               | 90                                                                                                                                                                          |
| Energy class          | E                                                                                                                                                                           |
| IP class              | 40                                                                                                                                                                          |
| Dimensions            | ø200x5cm                                                                                                                                                                    |
| Materials             | Aluminium                                                                                                                                                                   |
| Notes                 | included: 1 driver WALIMLED100/24, 1x dimmer interface WDIMDALIHP, 1x electrical cable 5m, 4x adjustable metal cables length 3m (including attachment). Shipped in 2 pieces |
| Customization options | Shapes, sizes                                                                                                                                                               |
| Accessories           | Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling                                                                  |
| Net lamp weight       | 7 kg                                                                                                                                                                        |

Codes

BZRC1620G15DBO  
BZRC1620G15DNE  
BZRC1620G15DOR

Structure

white  
black  
matte gold

PACKAGE


Package 01  
Dimension: 210x110x15 cm / Gross weight: 12,4 kg

Certificazioni






NEMO

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

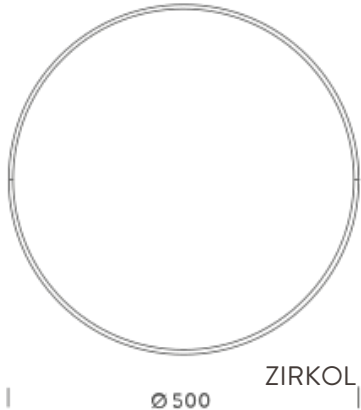

## Ø 2M | UP - DOWNLIGHT - 2700K

### LAMPING

|                       |                                                                                                                                                                                 |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                      |
| Total power           | 180W                                                                                                                                                                            |
| Emission              | Diffused orientable                                                                                                                                                             |
| Switching             | DALI 1-100%                                                                                                                                                                     |
| Tension               | 220/240V                                                                                                                                                                        |
| Color temperature     | 2700K                                                                                                                                                                           |
| Luminous flux         | 10500lm                                                                                                                                                                         |
| Typ CRI               | 90                                                                                                                                                                              |
| Energy class          | E                                                                                                                                                                               |
| IP class              | 40                                                                                                                                                                              |
| Dimensions            | ø200x5cm                                                                                                                                                                        |
| Materials             | Aluminium                                                                                                                                                                       |
| Notes                 | included: 1 driver WALIM250W24VIN, 1x dimmer interface WDIMDALIHP, 2x electrical cables 5m, 4x adjustable metal cables length 3m (including attachment).<br>Shipped in 2 pieces |
| Customization options | Shapes, sizes                                                                                                                                                                   |
| Accessories           | Canopy, for concrete ceiling   Canopy box, 1 driver, 2 electrical cables   Ceiling plate, for false ceiling                                                                     |
| Net lamp weight       | 7,2 kg                                                                                                                                                                          |

### Codes

BZRC1720G15DBO  
BZRC1720G15DNE  
BZRC1720G15DOR

### Structure

white  
black  
matte gold

### PACKAGE


Package 01  
Dimension: 210x110x15 cm / Gross weight: 12,6 kg

### Certificazioni






NEMO

### CIRCLE HOME 0,85-1-1,5m



### CIRCLE 2-3-5m

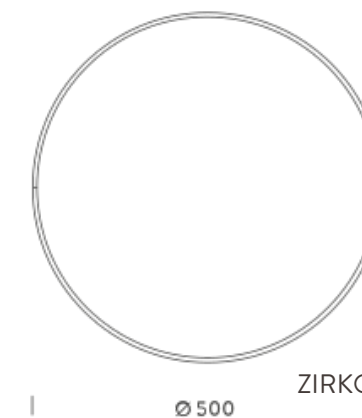

# Ø 2M | DOWNLIGHT - 3000K

## LAMPING

|                       |                                                                                                                                                                                    |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                         |
| Total power           | 90W                                                                                                                                                                                |
| Emission              | Diffused orientable                                                                                                                                                                |
| Switching             | DALI 1-100%                                                                                                                                                                        |
| Tension               | 110/240V                                                                                                                                                                           |
| Color temperature     | 3000K                                                                                                                                                                              |
| Luminous flux         | 5539lm                                                                                                                                                                             |
| Typ CRI               | 90                                                                                                                                                                                 |
| Energy class          | E                                                                                                                                                                                  |
| IP class              | 40                                                                                                                                                                                 |
| Dimensions            | ø200x5cm                                                                                                                                                                           |
| Materials             | Aluminium                                                                                                                                                                          |
| Notes                 | included: 1 driver WALIMLED100/24, 1x dimmer interface WDIMDALIHP, 1 electrical cable 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces |
| Customization options | Shapes, sizes                                                                                                                                                                      |
| Accessories           | Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling                                                                         |
| Net lamp weight       | 7 kg                                                                                                                                                                               |

## Codes

BZRC1620G15WBO  
BZRC1620G15WNE  
BZRC1620G15WOR

## Structure

white  
black  
matte gold

## PACKAGE


Package 01  
Dimension: 210x110x15 cm / Gross weight: 12,4 kg

## Certificazioni






NEMO

## CIRCLE HOME 0,85-1-1,5m



## CIRCLE 2-3-5m

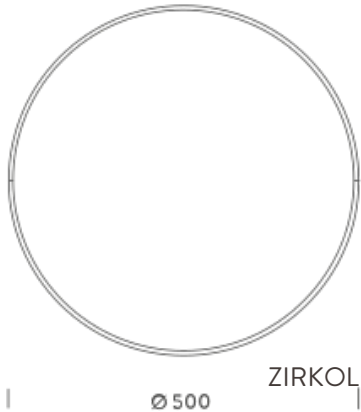

# Ø 2M | UP - DOWNLIGHT - 3000K

## LAMPING

|                       |                                                                                                                                                                                     |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                          |
| Total power           | 180W                                                                                                                                                                                |
| Emission              | Diffused orientable                                                                                                                                                                 |
| Switching             | DALI 1-100%                                                                                                                                                                         |
| Tension               | 220/240V                                                                                                                                                                            |
| Color temperature     | 3000K                                                                                                                                                                               |
| Luminous flux         | 11078lm                                                                                                                                                                             |
| Typ CRI               | 90                                                                                                                                                                                  |
| Energy class          | E                                                                                                                                                                                   |
| IP class              | 40                                                                                                                                                                                  |
| Dimensions            | ø200x5cm                                                                                                                                                                            |
| Materials             | Aluminium                                                                                                                                                                           |
| Notes                 | included: 1 driver WALIM250W24VIN, 1x dimmer interface WDIMDALIHP, 2 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces |
| Customization options | Shapes, sizes                                                                                                                                                                       |
| Accessories           | Canopy, for concrete ceiling   Canopy box, 1 driver, 2 electrical cables   Ceiling plate, for false ceiling                                                                         |
| Net lamp weight       | 7,2 kg                                                                                                                                                                              |

## Codes

BZRC1720G15WBO  
BZRC1720G15WNE  
BZRC1720G15WOR

## Structure

white  
black  
matte gold

## PACKAGE


Package 01      Dimension: 210x110x15 cm / Gross weight: 12,6 kg

## Certificazioni






NEMO

## CIRCLE HOME 0,85-1-1,5m



## CIRCLE 2-3-5m

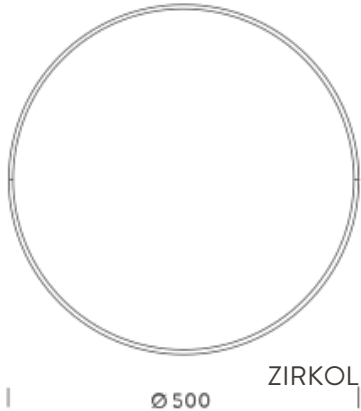

Ø 2M | DOWNLIGHT - 4000K

LAMPING

|                       |                                                                                                                                                                                    |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                         |
| Total power           | 90W                                                                                                                                                                                |
| Emission              | Diffused orientable                                                                                                                                                                |
| Switching             | DALI 1-100%                                                                                                                                                                        |
| Tension               | 110/240V                                                                                                                                                                           |
| Color temperature     | 4000K                                                                                                                                                                              |
| Luminous flux         | 6154lm                                                                                                                                                                             |
| Typ CRI               | 90                                                                                                                                                                                 |
| Energy class          | D                                                                                                                                                                                  |
| IP class              | 40                                                                                                                                                                                 |
| Dimensions            | ø200x5cm                                                                                                                                                                           |
| Materials             | Aluminium                                                                                                                                                                          |
| Notes                 | included: 1 driver WALIMLED100/24, 1x dimmer interface WDIMDALIHP, 1 electrical cable 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces |
| Customization options | Shapes, sizes                                                                                                                                                                      |
| Accessories           | Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling                                                                         |
| Net lamp weight       | 7 kg                                                                                                                                                                               |

Codes  
BZRC1620G15NBO  
BZRC1620G15NNE  
BZRC1620G15NOR


PACKAGE

Package 01      Dimension: 210x110x15 cm / Gross weight: 12,4 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

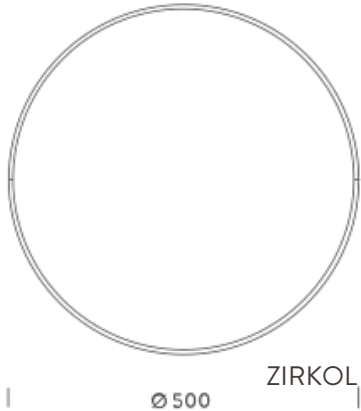



## Ø 2M | UP - DOWNLIGHT - 4000K

### LAMPING

|                       |                                                                                                                                                                                     |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                          |
| Total power           | 180W                                                                                                                                                                                |
| Emission              | Diffused orientable                                                                                                                                                                 |
| Switching             | DALI 1-100%                                                                                                                                                                         |
| Tension               | 220/240V                                                                                                                                                                            |
| Color temperature     | 4000K                                                                                                                                                                               |
| Luminous flux         | 12309lm                                                                                                                                                                             |
| Typ CRI               | 90                                                                                                                                                                                  |
| Energy class          | D                                                                                                                                                                                   |
| IP class              | 40                                                                                                                                                                                  |
| Dimensions            | ø200x5cm                                                                                                                                                                            |
| Materials             | Aluminium                                                                                                                                                                           |
| Notes                 | included: 1 driver WALIM250W24VIN, 1x dimmer interface WDIMDALIHP, 2 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces |
| Customization options | Shapes, sizes                                                                                                                                                                       |
| Accessories           | Canopy, for concrete ceiling   Canopy box, 1 driver, 2 electrical cables   Ceiling plate, for false ceiling                                                                         |
| Net lamp weight       | 7,2 kg                                                                                                                                                                              |

### Codes

BZRC1720G15NBO  
BZRC1720G15NNE  
BZRC1720G15NOR

### Structure

white  
black  
matte gold

### PACKAGE


Package 01 Dimension: 210x110x15 cm / Gross weight: 12,6 kg

### Certificazioni






NEMO

### CIRCLE HOME 0,85-1-1,5m



### CIRCLE 2-3-5m

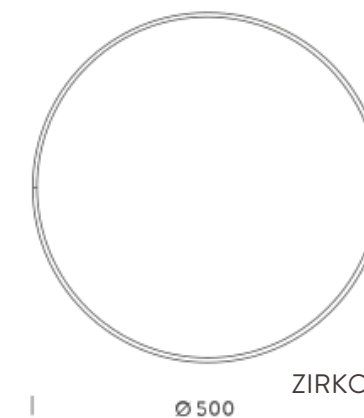

Ø 3M | DOWNLIGHT - 2700K

LAMPING

|                       |                                                                                                                                                                                    |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                         |
| Total power           | 134W                                                                                                                                                                               |
| Emission              | Diffused orientable                                                                                                                                                                |
| Switching             | 1-100%                                                                                                                                                                             |
| Tension               | 220/240V                                                                                                                                                                           |
| Color temperature     | 2700K                                                                                                                                                                              |
| Luminous flux         | 7820lm                                                                                                                                                                             |
| Typ CRI               | 90                                                                                                                                                                                 |
| Energy class          | E                                                                                                                                                                                  |
| IP class              | 40                                                                                                                                                                                 |
| Dimensions            | ø300x5cm                                                                                                                                                                           |
| Materials             | Aluminium                                                                                                                                                                          |
| Notes                 | included: 1 driver WALIM150W24VIN, 1x dimmer interface WDIMDALIHP, 1 electrical cable 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 3 pieces |
| Customization options | Shapes, sizes                                                                                                                                                                      |
| Accessories           | Canopy, for concrete ceiling   Ceiling plate, for false ceiling                                                                                                                    |
| Net lamp weight       | 9,8 kg                                                                                                                                                                             |

Codes

BZRC1630G15DBO  
BZRC1630G15DNE  
BZRC1630G15DOR

PACKAGE


Package 01      Dimension: 310x110x15 cm / Gross weight: 17,8 kg

Certificazioni






NEMO

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

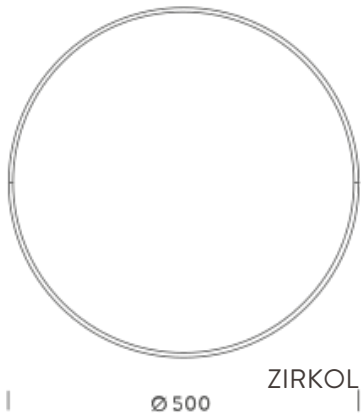

Ø 3M | UP - DOWNLIGHT - 2700K

LAMPING

|                       |                                                                                                                                                                                       |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                            |
| Total power           | 268W                                                                                                                                                                                  |
| Emission              | Diffused orientable                                                                                                                                                                   |
| Switching             | DALI 1-100%                                                                                                                                                                           |
| Tension               | 110/240V                                                                                                                                                                              |
| Color temperature     | 2700K                                                                                                                                                                                 |
| Luminous flux         | 15640lm                                                                                                                                                                               |
| Typ CRI               | 90                                                                                                                                                                                    |
| Energy class          | E                                                                                                                                                                                     |
| IP class              | 40                                                                                                                                                                                    |
| Dimensions            | ø300x5cm                                                                                                                                                                              |
| Materials             | Aluminium                                                                                                                                                                             |
| Notes                 | included: 3 drivers WALIMLED100/24, 3x dimmer interface WDIMDALIHP, 3x electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 3 pieces |
| Customization options | Shapes, sizes                                                                                                                                                                         |
| Accessories           | Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling                                                                            |
| Net lamp weight       | 12,3 kg                                                                                                                                                                               |

Codes

BZRC1730G15DBO  
BZRC1730G15DNE  
BZRC1730G15DOR

Structure

white  
black  
matte gold

PACKAGE


Package 01      Dimension: 310x110x15 cm / Gross weight: 20,3 kg

Certificazioni






NEMO

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

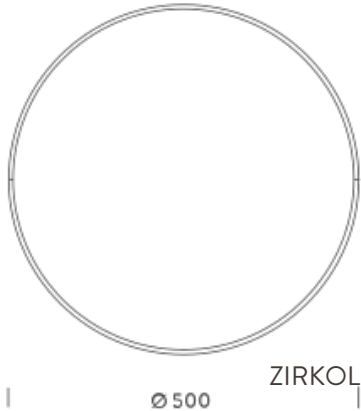

# Ø 3M | DOWNLIGHT - 3000K

## LAMPING

|                       |                                                                                                                                                                                    |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                         |
| Total power           | 134W                                                                                                                                                                               |
| Emission              | Diffused orientable                                                                                                                                                                |
| Switching             | DALI 1-100%                                                                                                                                                                        |
| Tension               | 220/240V                                                                                                                                                                           |
| Color temperature     | 3000K                                                                                                                                                                              |
| Luminous flux         | 8238lm                                                                                                                                                                             |
| Typ CRI               | 90                                                                                                                                                                                 |
| Energy class          | E                                                                                                                                                                                  |
| IP class              | 40                                                                                                                                                                                 |
| Dimensions            | ø300x5cm                                                                                                                                                                           |
| Materials             | Aluminium                                                                                                                                                                          |
| Notes                 | included: 1 driver WALIM150W24VIN, 1x dimmer interface WDIMDALIHP, 1 electrical cable 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 3 pieces |
| Customization options | Shapes, sizes                                                                                                                                                                      |
| Accessories           | Canopy, for concrete ceiling   Ceiling plate, for false ceiling                                                                                                                    |
| Net lamp weight       | 9,8 kg                                                                                                                                                                             |

## Codes

BZRC1630G15WBO  
BZRC1630G15WNE  
BZRC1630G15WOR

## PACKAGE


Package 01      Dimension: 310x110x15 cm / Gross weight: 17,8 kg

## Certificazioni






NEMO

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

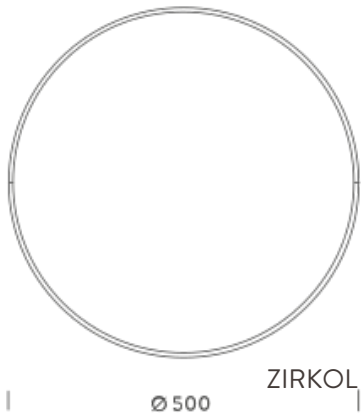

# Ø 3M | UP - DOWNLIGHT - 3000K

## LAMPING

|                       |                                                                                                                                                                                     |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                          |
| Total power           | 268W                                                                                                                                                                                |
| Emission              | Diffused orientable                                                                                                                                                                 |
| Switching             | DALI 1-100%                                                                                                                                                                         |
| Tension               | 110/240V                                                                                                                                                                            |
| Color temperature     | 3000K                                                                                                                                                                               |
| Luminous flux         | 16476lm                                                                                                                                                                             |
| Typ CRI               | 90                                                                                                                                                                                  |
| Energy class          | E                                                                                                                                                                                   |
| IP class              | 40                                                                                                                                                                                  |
| Dimensions            | ø300x5cm                                                                                                                                                                            |
| Materials             | Aluminium                                                                                                                                                                           |
| Notes                 | included: 3 driver WALIMLED100/24, 3x dimmer interface WDIMDALIHP, 3 electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 3 pieces |
| Customization options | Shapes, sizes                                                                                                                                                                       |
| Accessories           | Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling                                                                          |
| Net lamp weight       | 12,3 kg                                                                                                                                                                             |

## Codes

BZRC1730G15WBO  
BZRC1730G15WNE  
BZRC1730G15WOR

## Structure

white  
black  
matte gold

## PACKAGE


Package 01      Dimension: 310x110x15 cm / Gross weight: 20,3 kg

## Certificazioni






NEMO

## CIRCLE HOME 0,85-1-1,5m



## CIRCLE 2-3-5m

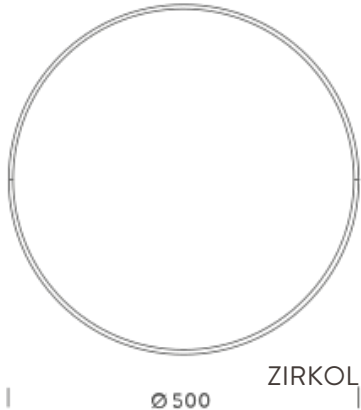

# Ø 3M | DOWNLIGHT - 4000K

## LAMPING

|                       |                                                                                                                                                                                    |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                         |
| Total power           | 134W                                                                                                                                                                               |
| Emission              | Diffused orientable                                                                                                                                                                |
| Switching             | DALI 1-100%                                                                                                                                                                        |
| Tension               | 220/240V                                                                                                                                                                           |
| Color temperature     | 4000K                                                                                                                                                                              |
| Luminous flux         | 9153lm                                                                                                                                                                             |
| Typ CRI               | 90                                                                                                                                                                                 |
| Energy class          | D                                                                                                                                                                                  |
| IP class              | 40                                                                                                                                                                                 |
| Dimensions            | ø300x5cm                                                                                                                                                                           |
| Materials             | Aluminium                                                                                                                                                                          |
| Notes                 | included: 1 driver WALIM150W24VIN, 1x dimmer interface WDIMDALIHP, 1 electrical cable 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 3 pieces |
| Customization options | Shapes, sizes                                                                                                                                                                      |
| Accessories           | Canopy, for concrete ceiling   Ceiling plate, for false ceiling                                                                                                                    |
| Net lamp weight       | 9,8 kg                                                                                                                                                                             |

## Codes

BZRC1630G15NBO  
BZRC1630G15NNE  
BZRC1630G15NOR

## PACKAGE


Package 01      Dimension: 310x110x15 cm / Gross weight: 17,8 kg

## Certificazioni






NEMO

## CIRCLE HOME 0,85-1-1,5m



## CIRCLE 2-3-5m

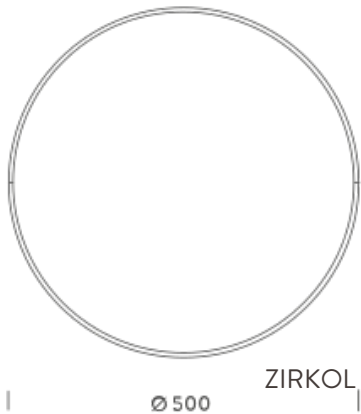

Ø 3M | UP - DOWNLIGHT - 4000K

LAMPING

|                       |                                                                                                                                                                                     |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                          |
| Total power           | 268W                                                                                                                                                                                |
| Emission              | Diffused orientable                                                                                                                                                                 |
| Switching             | DALI 1-100%                                                                                                                                                                         |
| Tension               | 110/240V                                                                                                                                                                            |
| Color temperature     | 4000K                                                                                                                                                                               |
| Luminous flux         | 18306lm                                                                                                                                                                             |
| Typ CRI               | 90                                                                                                                                                                                  |
| Energy class          | D                                                                                                                                                                                   |
| IP class              | 40                                                                                                                                                                                  |
| Dimensions            | ø300x5cm                                                                                                                                                                            |
| Materials             | Aluminium                                                                                                                                                                           |
| Notes                 | included: 3 driver WALIMLED100/24, 3x dimmer interface WDIMDALIHP, 3 electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 3 pieces |
| Customization options | Shapes, sizes                                                                                                                                                                       |
| Accessories           | Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling                                                                          |
| Net lamp weight       | 12,3 kg                                                                                                                                                                             |

Codes

BZRC1730G15NBO  
BZRC1730G15NNE  
BZRC1730G15NOR

Structure

white  
black  
matte gold

PACKAGE


Package 01      Dimension: 310x110x15 cm / Gross weight: 20,3 kg

Certificazioni






NEMO

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

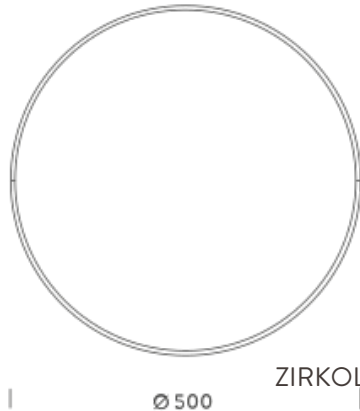

# Ø 5M | DOWNLIGHT -2700K

## LAMPING

|                       |                                                                                                                                                                                       |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                            |
| Total power           | 226W                                                                                                                                                                                  |
| Emission              | Diffused orientable                                                                                                                                                                   |
| Switching             | DALI 1-100%                                                                                                                                                                           |
| Tension               | 220/240V                                                                                                                                                                              |
| Color temperature     | 2700K                                                                                                                                                                                 |
| Luminous flux         | 13100lm                                                                                                                                                                               |
| Typ CRI               | 90                                                                                                                                                                                    |
| Energy class          | E                                                                                                                                                                                     |
| IP class              | 40                                                                                                                                                                                    |
| Dimensions            | ø500x5cm                                                                                                                                                                              |
| Materials             | Aluminum                                                                                                                                                                              |
| Notes                 | included: 1x driver WALIM250W24VIN, 1x dimmer interface WDIMDALIHP, 2 electrical cables 5m, 10x adjustable metal cables length 3m (including ceiling attachment). Shipped in 5 pieces |
| Customization options | Shapes, sizes                                                                                                                                                                         |
| Accessories           | Canopy, for concrete ceiling   Canopy box, 1 driver, 2 electrical cables   Ceiling plate, for false ceiling                                                                           |
| Net lamp weight       | 15,9 kg                                                                                                                                                                               |

## Codes

BZRC1650G15DBO  
BZRC1650G15DNE  
BZRC1650G15DOR

## PACKAGE


Package 01

## Structure




white  
black  
matte gold

Dimension: 310x110x15 cm / Gross weight: 23,9 kg

## CIRCLE HOME 0,85-1-1,5m



## CIRCLE 2-3-5m

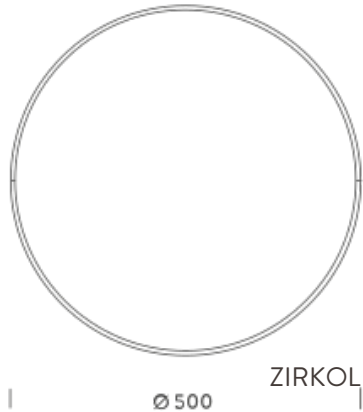

## Certificazioni





## Ø 5M | UP - DOWNLIGHT - 2700K

### LAMPING

|                   |                                                                                                                                                                                       |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source            | Linear LED                                                                                                                                                                            |
| Total power       | 452W                                                                                                                                                                                  |
| Emission          | Diffused orientable                                                                                                                                                                   |
| Switching         | DALI 1-100%                                                                                                                                                                           |
| Tension           | 220/240V                                                                                                                                                                              |
| Color temperature | 2700K                                                                                                                                                                                 |
| Luminous flux     | 26100lm                                                                                                                                                                               |
| Typ CRI           | 90                                                                                                                                                                                    |
| Energy class      | E                                                                                                                                                                                     |
| IP class          | 40                                                                                                                                                                                    |
| Dimensions        | ø500x5cm                                                                                                                                                                              |
| Notes             | included: 5x driver WALIM120W24VIN, 5x dimmer interface WDIMDALIHP, 5 electrical cables 5m, 10x adjustable metal cables length 3m (including ceiling attachment). Shipped in 5 pieces |
| Accessories       | Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling                                                                            |
| Net lamp weight   | 20,3 kg                                                                                                                                                                               |

### Codes

BZRC1750G15DBO  
BZRC1750G15DNE  
BZRC1750G15DOR

### Structure

white  
black  
matte gold


### PACKAGE

Package 01      Dimension: 310x110x15 cm / Gross weight: 28,3 kg




### Certificazioni



### CIRCLE HOME 0,85-1-1,5m



### CIRCLE 2-3-5m

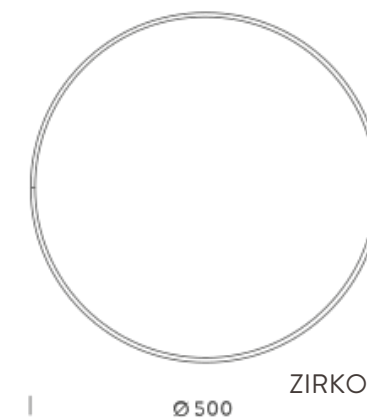

Ø 5M | DOWNLIGHT - 3000K

LAMPING

|                       |                                                                                                                                                                                       |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                            |
| Total power           | 226W                                                                                                                                                                                  |
| Emission              | Diffused orientable                                                                                                                                                                   |
| Switching             | DALI 1-100%                                                                                                                                                                           |
| Tension               | 220/240V                                                                                                                                                                              |
| Color temperature     | 3000K                                                                                                                                                                                 |
| Luminous flux         | 13847lm                                                                                                                                                                               |
| Typ CRI               | 90                                                                                                                                                                                    |
| Energy class          | E                                                                                                                                                                                     |
| IP class              | 40                                                                                                                                                                                    |
| Dimensions            | ø500x5cm                                                                                                                                                                              |
| Materials             | Aluminium                                                                                                                                                                             |
| Notes                 | included: 1x driver WALIM250W24VIN, 1x dimmer interface WDIMDALIHP, 2 electrical cables 5m, 10x adjustable metal cables length 3m (including ceiling attachment). Shipped in 5 pieces |
| Customization options | Shapes, sizes                                                                                                                                                                         |
| Accessories           | Canopy, for concrete ceiling   Canopy box, 1 driver, 2 electrical cables   Ceiling plate, for false ceiling                                                                           |
| Net lamp weight       | 15,9 kg                                                                                                                                                                               |

Codes

BZRC1650G15WBO  
BZRC1650G15WNE  
BZRC1650G15WOR

Structure

white  
black  
matte gold

PACKAGE


Package 01  
Dimension: 310x110x15 cm / Gross weight: 23,9 kg

Certificazioni






NEMO

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

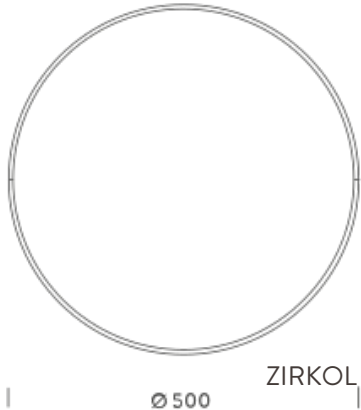

Ø 5M | UP - DOWNLIGHT - 3000K

LAMPING

|                       |                                                                                                                                                                                       |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                            |
| Total power           | 452W                                                                                                                                                                                  |
| Emission              | Diffused orientable                                                                                                                                                                   |
| Switching             | DALI 1-100%                                                                                                                                                                           |
| Tension               | 220/240V                                                                                                                                                                              |
| Color temperature     | 3000K                                                                                                                                                                                 |
| Luminous flux         | 27695lm                                                                                                                                                                               |
| Typ CRI               | 90                                                                                                                                                                                    |
| Energy class          | E                                                                                                                                                                                     |
| IP class              | 40                                                                                                                                                                                    |
| Dimensions            | ø500x5cm                                                                                                                                                                              |
| Materials             | Aluminium                                                                                                                                                                             |
| Notes                 | included: 5x driver WALIM120W24VIN, 5x dimmer interface WDIMDALIHP, 5 electrical cables 5m, 10x adjustable metal cables length 3m (including ceiling attachment). Shipped in 5 pieces |
| Customization options | Shapes, sizes                                                                                                                                                                         |
| Accessories           | Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling                                                                            |
| Net lamp weight       | 20,3 kg                                                                                                                                                                               |

Codes

BZRC1750G15WBO  
BZRC1750G15WNE  
BZRC1750G15WOR

Structure

white  
black  
matte gold

PACKAGE


Package 01      Dimension: 310x110x15 cm / Gross weight: 28,3 kg

Certificazioni






NEMO

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

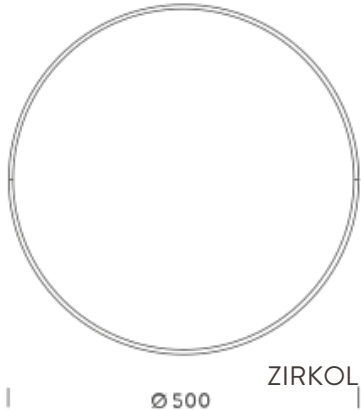

## Ø 5M | DOWNLIGHT - 4000K

### LAMPING

|                       |                                                                                                                                                                                       |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                            |
| Total power           | 226W                                                                                                                                                                                  |
| Emission              | Diffused orientable                                                                                                                                                                   |
| Switching             | DALI 1-100%                                                                                                                                                                           |
| Tension               | 220/240V                                                                                                                                                                              |
| Color temperature     | 4000K                                                                                                                                                                                 |
| Luminous flux         | 15386lm                                                                                                                                                                               |
| Typ CRI               | 90                                                                                                                                                                                    |
| Energy class          | D                                                                                                                                                                                     |
| IP class              | 40                                                                                                                                                                                    |
| Dimensions            | ø500x5cm                                                                                                                                                                              |
| Materials             | Aluminium                                                                                                                                                                             |
| Notes                 | included: 1x driver WALIM250W24VIN, 1x dimmer interface WDIMDALIHP, 2 electrical cables 5m, 10x adjustable metal cables length 3m (including ceiling attachment). Shipped in 5 pieces |
| Customization options | Shapes, sizes                                                                                                                                                                         |
| Accessories           | Canopy, for concrete ceiling   Canopy box, 1 driver, 2 electrical cables   Ceiling plate, for false ceiling                                                                           |
| Net lamp weight       | 15,9 kg                                                                                                                                                                               |

### Codes

BZRC1650G15NBO  
BZRC1650G15NNE  
BZRC1650G15NOR

### Structure

white  
black  
matte gold

### PACKAGE


Package 01 Dimension: 310x110x15 cm / Gross weight: 23,9 kg

### Certificazioni






NEMO

### CIRCLE HOME 0,85-1-1,5m



### CIRCLE 2-3-5m

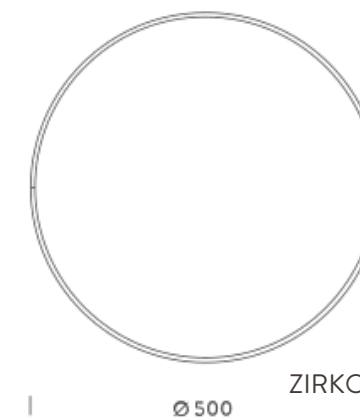

Ø 5M | UP - DOWNLIGHT - 4000K

LAMPING

|                       |                                                                                                                                                                                       |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                | Linear LED                                                                                                                                                                            |
| Total power           | 452W                                                                                                                                                                                  |
| Emission              | Diffused orientable                                                                                                                                                                   |
| Switching             | DALI 1-100%                                                                                                                                                                           |
| Tension               | 220/240V                                                                                                                                                                              |
| Color temperature     | 4000K                                                                                                                                                                                 |
| Luminous flux         | 30772lm                                                                                                                                                                               |
| Typ CRI               | 90                                                                                                                                                                                    |
| Energy class          | D                                                                                                                                                                                     |
| IP class              | 40                                                                                                                                                                                    |
| Dimensions            | ø500x5cm                                                                                                                                                                              |
| Materials             | Aluminium                                                                                                                                                                             |
| Notes                 | included: 5x driver WALIM120W24VIN, 5x dimmer interface WDIMDALIHP, 5 electrical cables 5m, 10x adjustable metal cables length 3m (including ceiling attachment). Shipped in 5 pieces |
| Customization options | Shapes, sizes                                                                                                                                                                         |
| Accessories           | Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling                                                                            |
| Net lamp weight       | 20,3 kg                                                                                                                                                                               |

Codes

BZRC1750G15NBO  
BZRC1750G15NNE  
BZRC1750G15NOR

Structure

white  
black  
matte gold

PACKAGE


Package 01      Dimension: 310x110x15 cm / Gross weight: 28,3 kg

Certificazioni



NEMO

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

