

# ZIRKOL OVAL

ZIRKOL – O ist eine Familie von ovalen Hängeleuchten, die sich ideal für die allgemeine und dekorative Beleuchtung von Räumen eignen.

Gehäuse aus eloxiertem Aluminium und Opalschutz für homogene Beleuchtung.

Direkte oder doppelte Lichtemission mit hohem Lichtstrom und mit drei verschiedenen Farbtemperaturen.

Fernspeisung im Lieferumfang.



## 2X1M | DOWNLIGHT - 2700K

### LAMPING

Source	Linear LED
Total power	74W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	110/240V
Color temperature	2700K
Luminous flux	4282lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	200x100x5cm
Materials	Aluminium
Notes	included: 1 driver WALIMLED100/24, 1 dimmer interface WDIMDALIHP, 1x electrical cable 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped assembled
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling
Net lamp weight	6 kg

### Codes

BZRO16A20G15DBO  
BZRO16A20G15DNE  
BZRO16A20G15DOR

### Structure

white  
black  
gold


### PACKAGE

Package 01 Dimension: 210x110x15 cm / Gross weight: 11,4 kg

### Certificazioni



NEMO<sup>3.000</sup>

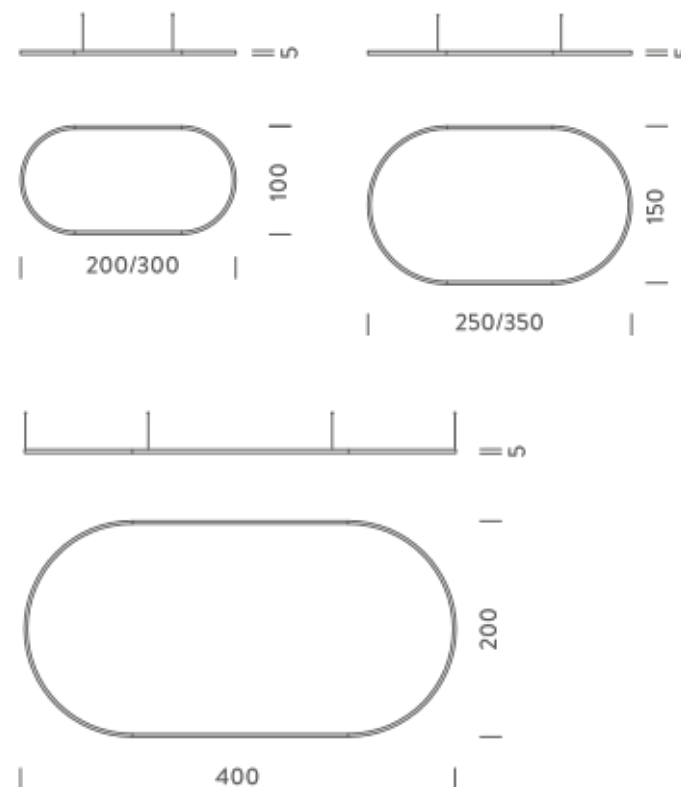

## 2X1M | UP - DOWNLIGHT - 2700K

### LAMPING

Source	Linear LED
Total power	148W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	8563lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	200x100x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM150W24VIN, 1 dimmer interface WDIMDALIHP, 2x electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped assembled
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 2 electrical cables   Ceiling plate, for false ceiling
Net lamp weight	6,1 kg

### Codes

BZRO17A20G15DBO  
BZRO17A20G15DNE  
BZRO17A20G15DOR

### Structure

white  
black  
gold


### PACKAGE

Package 01 Dimension: 210x110x15 cm / Gross weight: 11,5 kg

### Certificazioni



NEMO<sup>3.000</sup>

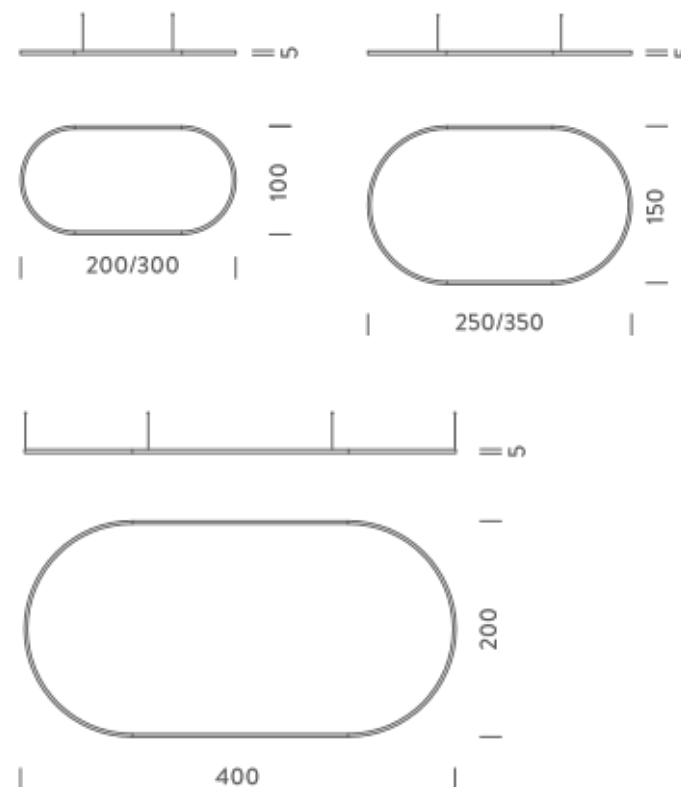

## 2X1M | DOWNLIGHT - 3000K

### LAMPING

Source	Linear LED
Total power	74W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	110/240V
Color temperature	3000K
Luminous flux	4533lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	200x100x5cm
Materials	Aluminium
Notes	included: 1 driver WALIMLED100/24, 1 dimmer interface WDIMDALIHP, 1x electrical cable 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped assembled
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling
Net lamp weight	6 kg

### Codes

BZRO16A20G15WBO  
BZRO16A20G15WNE  
BZRO16A20G15WOR

### Structure

white  
black  
gold


### PACKAGE

Package 01 Dimension: 210x110x15 cm / Gross weight: 11,4 kg

### Certificazioni



NEMO<sup>3,000</sup>

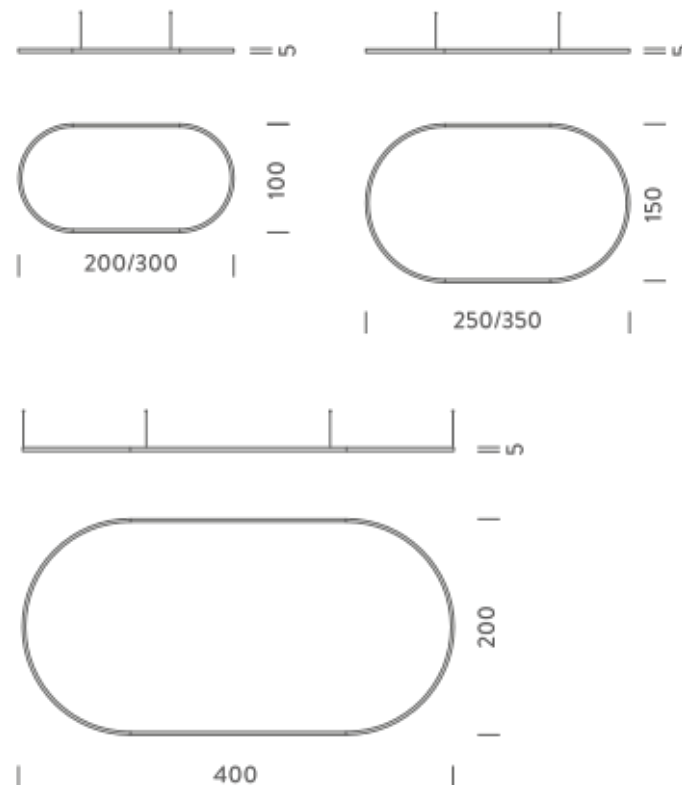

## 2X1M | UP - DOWNLIGHT - 3000K

### LAMPING

Source	Linear LED
Total power	148W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	9067lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	200x100x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM150W24VIN, 1 dimmer interface WDIMDALIHP, 2x electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped assembled
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 2 electrical cables   Ceiling plate, for false ceiling
Net lamp weight	6,1 kg

### Codes

BZRO17A20G15WBO  
BZRO17A20G15WNE  
BZRO17A20G15WOR

### Structure

white  
black  
gold


### PACKAGE

Package 01 Dimension: 210x110x15 cm / Gross weight: 11,5 kg

### Certificazioni



NEMO<sup>3.000</sup>

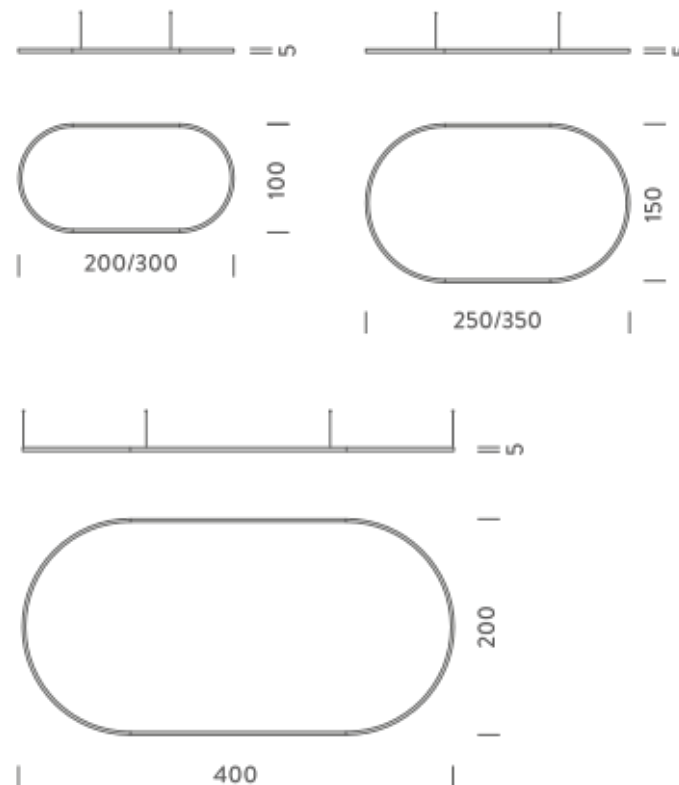

## 2X1M | DOWNLIGHT - 4000K

### LAMPING

Source	Linear LED
Total power	74W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	110/240V
Color temperature	4000K
Luminous flux	5037lm
Typ CRI	90
Energy class	D
IP class	40
Dimensions	200x100x5cm
Materials	Aluminium
Notes	included: 1 driver WALIMLED100/24, 1 dimmer interface WDIMDALIHP, 1x electrical cable 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped assembled
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling
Net lamp weight	6 kg

### Codes

BZRO16A20G15NBO  
BZRO16A20G15NNE  
BZRO16A20G15NOR

### Structure

white  
black  
gold


### PACKAGE

Package 01 Dimension: 210x110x15 cm / Gross weight: 11,4 kg

### Certificazioni



NEMO<sup>3,000</sup>

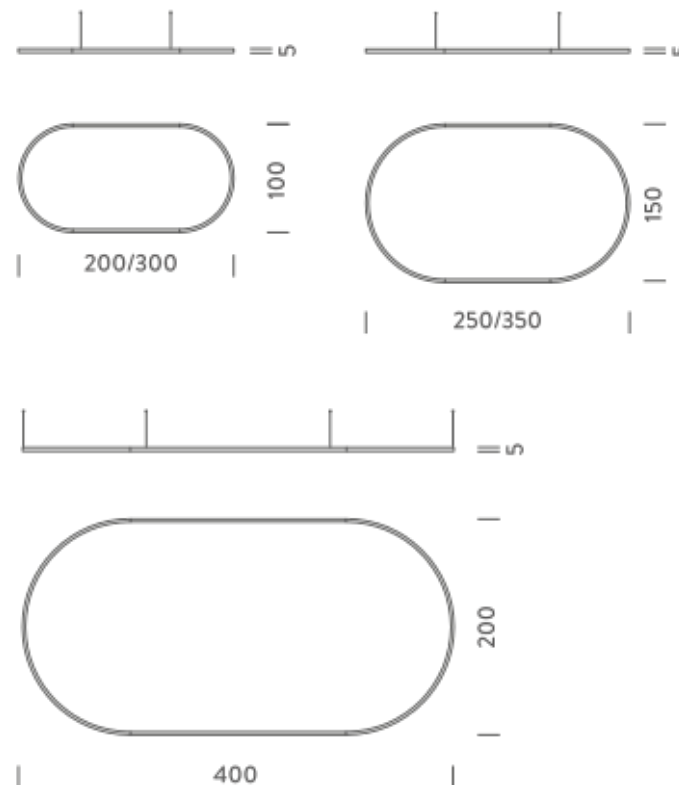

## 2X1M | UP - DOWNLIGHT - 4000K

### LAMPING

Source	Linear LED
Total power	148W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	10074lm
Typ CRI	90
Energy class	D
IP class	40
Dimensions	200x100x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM150W24VIN, 1 dimmer interface WDIMDALIHP, 2x electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped assembled
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 2 electrical cables   Ceiling plate, for false ceiling
Net lamp weight	6,1 kg

### Codes

BZRO17A20G15NBO  
BZRO17A20G15NNE  
BZRO17A20G15NOR

### Structure

white  
black  
gold


### PACKAGE

Package 01 Dimension: 210x110x15 cm / Gross weight: 11,5 kg

### Certificazioni



NEMO<sup>3,000</sup>

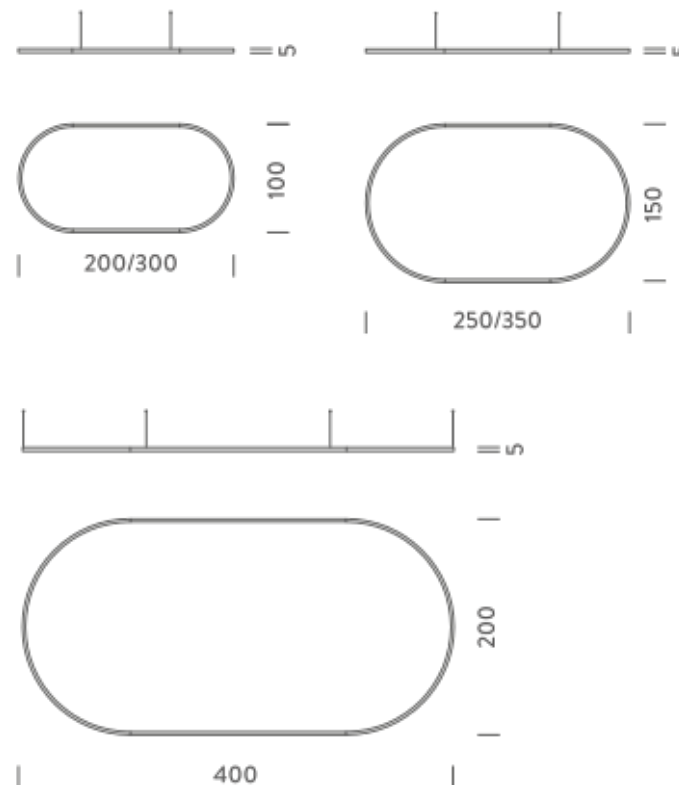

## 3X1M | DOWNLIGHT - 2700K

### LAMPING

Source	Linear LED
Total power	103W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	5948lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	300x100x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM150W24VIN, 1 dimmer interface WDIMDALIHP, 1x electrical cable 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped assembled
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling
Net lamp weight	7,7 kg

### Codes

BZRO16A30G15DBO  
BZRO16A30G15DNE  
BZRO16A30G15DOR

### Structure

white  
black  
gold


### PACKAGE

Package 01 Dimension: 310x100x15 cm / Gross weight: 15,7 kg

### Certificazioni



NEMO<sup>3,000</sup>

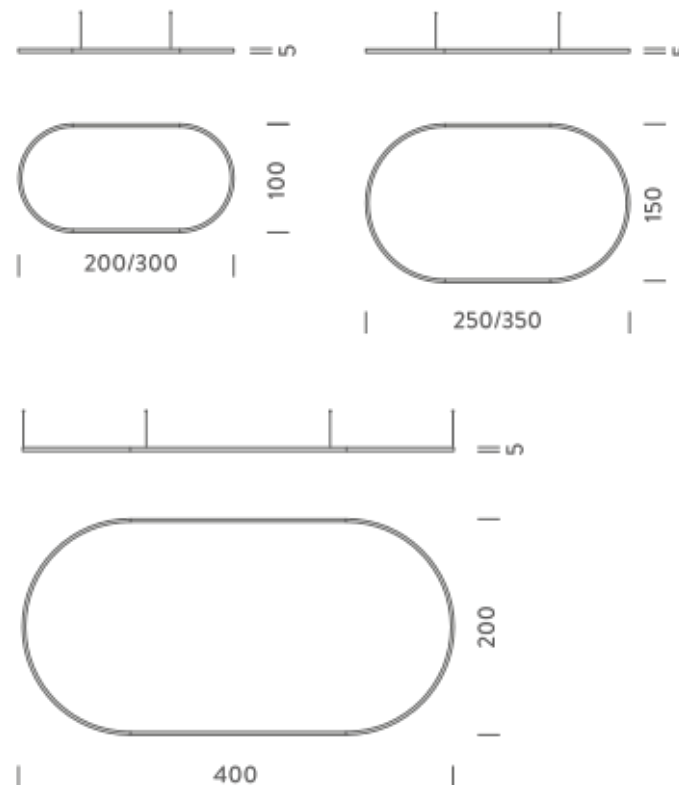



## 3X1M | UP - DOWNLIGHT - 2700K

### LAMPING

Source	Linear LED
Total power	206W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	11895lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	300x100x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 2x electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped assembled
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 2 electrical cables   Ceiling plate, for false ceiling
Net lamp weight	8 kg

### Codes

BZRO17A30G15DBO  
BZRO17A30G15DNE  
BZRO17A30G15DOR

### Structure

white  
black  
gold


### PACKAGE

Package 01 Dimension: 310x100x15 cm / Gross weight: 16 kg

### Certificazioni



NEMO<sup>3,000</sup>

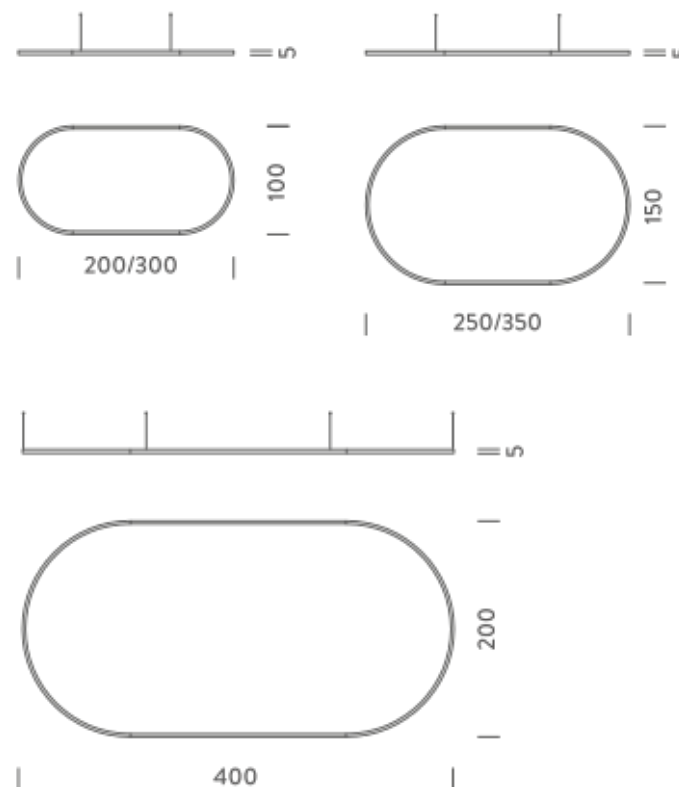

## 3X1M | DOWNLIGHT - 3000K

### LAMPING

Source	Linear LED
Total power	103W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	6297lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	300x100x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM150W24VIN, 1 dimmer interface WDIMDALIHP, 1x electrical cable 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped assembled
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling
Net lamp weight	7,7 kg

### Codes

BZRO16A30G15WBO  
BZRO16A30G15WNE  
BZRO16A30G15WOR

### Structure

white  
black  
gold


### PACKAGE

Package 01 Dimension: 310x100x15 cm / Gross weight: 15,7 kg

### Certificazioni



NEMO<sup>3,000</sup>

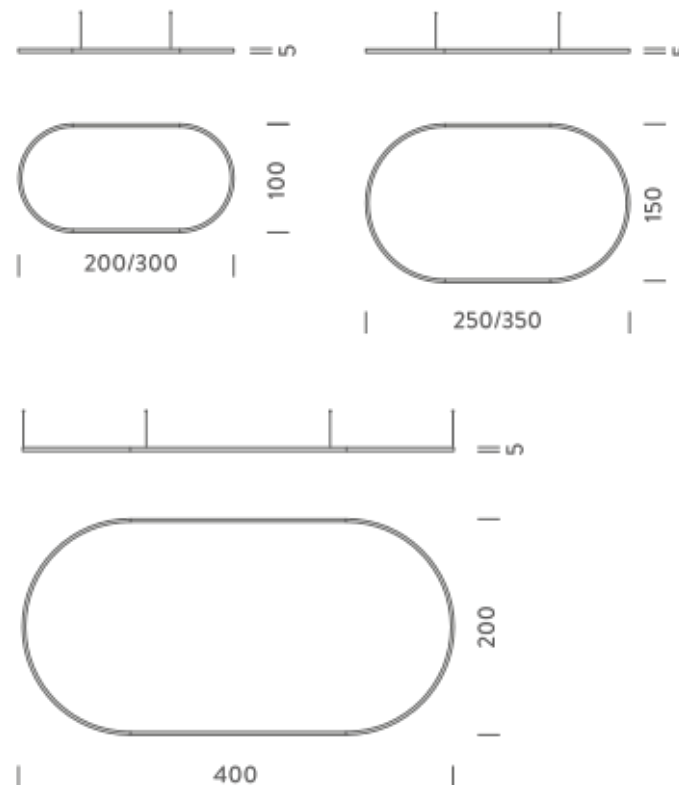

## 3X1M | UP - DOWNLIGHT - 3000K

### LAMPING

Source	Linear LED
Total power	206W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	12595lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	300x100x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 2x electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped assembled
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 2 electrical cables   Ceiling plate, for false ceiling
Net lamp weight	8 kg

### Codes

BZRO17A30G15WBO  
BZRO17A30G15WNE  
BZRO17A30G15WOR

### Structure

white  
black  
gold


### PACKAGE

Package 01 Dimension: 310x100x15 cm / Gross weight: 16 kg

### Certificazioni



NEMO<sup>3,000</sup>

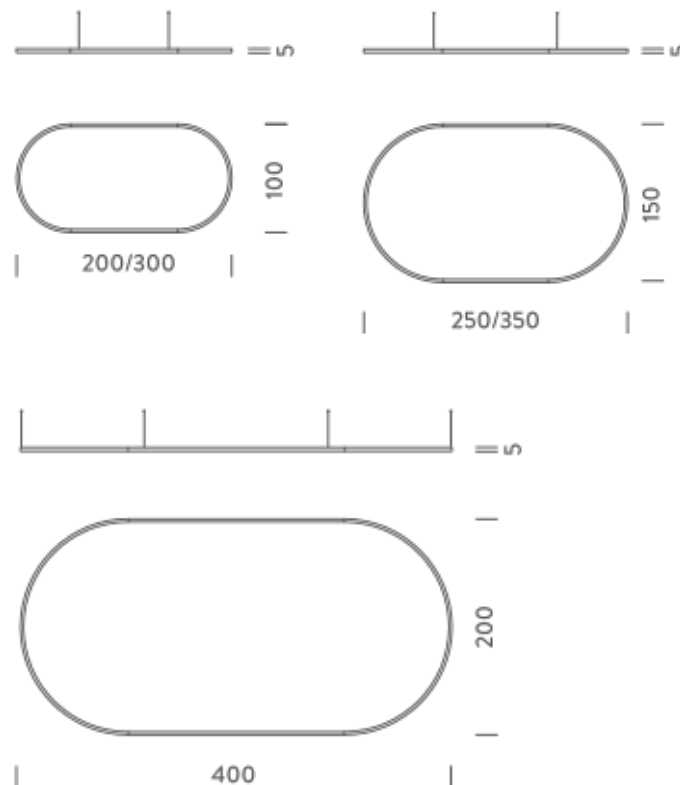

# 3X1M | DOWNLIGHT - 4000K

## LAMPING

Source	Linear LED
Total power	103W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	6997lm
Typ CRI	90
Energy class	D
IP class	40
Dimensions	300x100x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM150W24VIN, 1 dimmer interface WDIMDALIHP, 1x electrical cable 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped assembled
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling
Net lamp weight	7,7 kg

## Codes

BZRO16A30G15NBO  
BZRO16A30G15NNE  
BZRO16A30G15NOR

## Structure

white  
black  
gold


## PACKAGE

Package 01 Dimension: 310x100x15 cm / Gross weight: 15,7 kg

## Certificazioni



NEMO 3.000

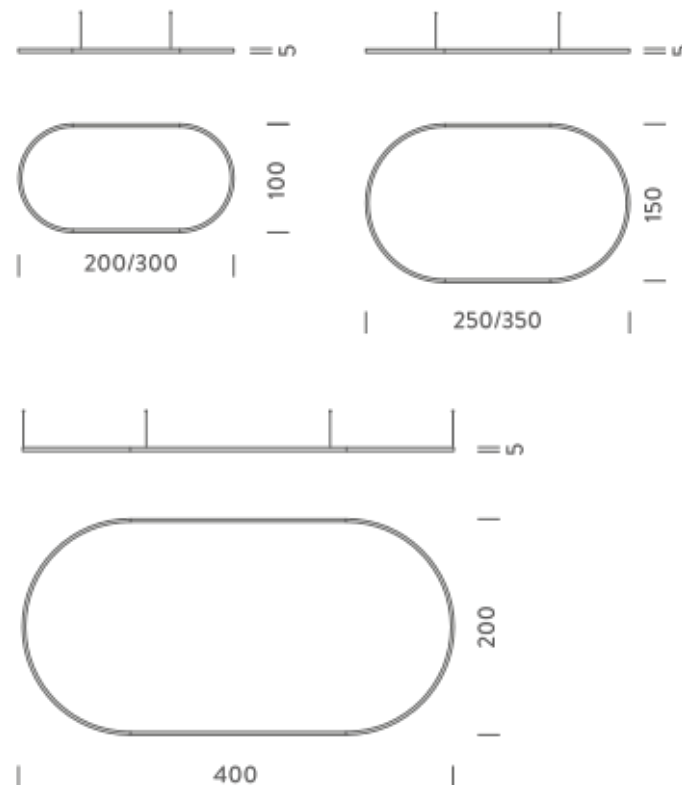

## 3X1M | UP - DOWNLIGHT - 4000K

### LAMPING

Source	Linear LED
Total power	206W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	13994lm
Typ CRI	90
Energy class	D
IP class	40
Dimensions	300x100x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 2x electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped assembled
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 2 electrical cables   Ceiling plate, for false ceiling
Net lamp weight	8 kg

### Codes

BZRO17A30G15NBO  
BZRO17A30G15NNE  
BZRO17A30G15NOR

### Structure

white  
black  
gold


### PACKAGE

Package 01 Dimension: 310x100x15 cm / Gross weight: 16 kg

### Certificazioni



NEMO<sup>3,000</sup>

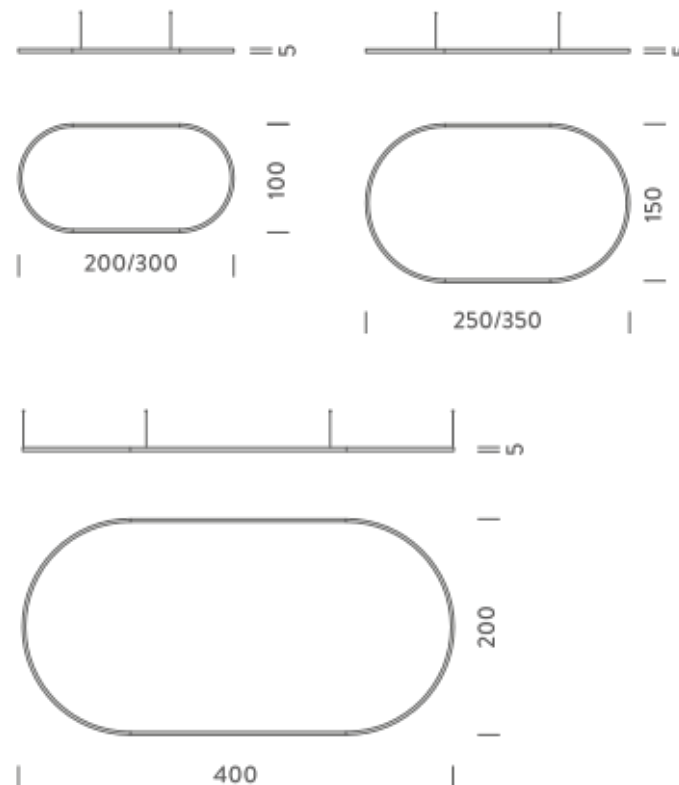

## 2,5X1,5M | DOWNLIGHT - 2700K

### LAMPING

Source	Linear LED
Total power	97W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	5589lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	250x150x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM150W24VIN, 1 dimmer interface WDIMDALIHP, 1x electrical cable 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling
Net lamp weight	7,3 kg

### Codes

BZRO16B25G15DBO  
BZRO16B25G15DNE  
BZRO16B25G15DOR

### Structure

white  
black  
gold


### PACKAGE

Package 01 Dimension: 160x160x15 cm / Gross weight: 10,8 kg

### Certificazioni



NEMO<sup>3,000</sup>

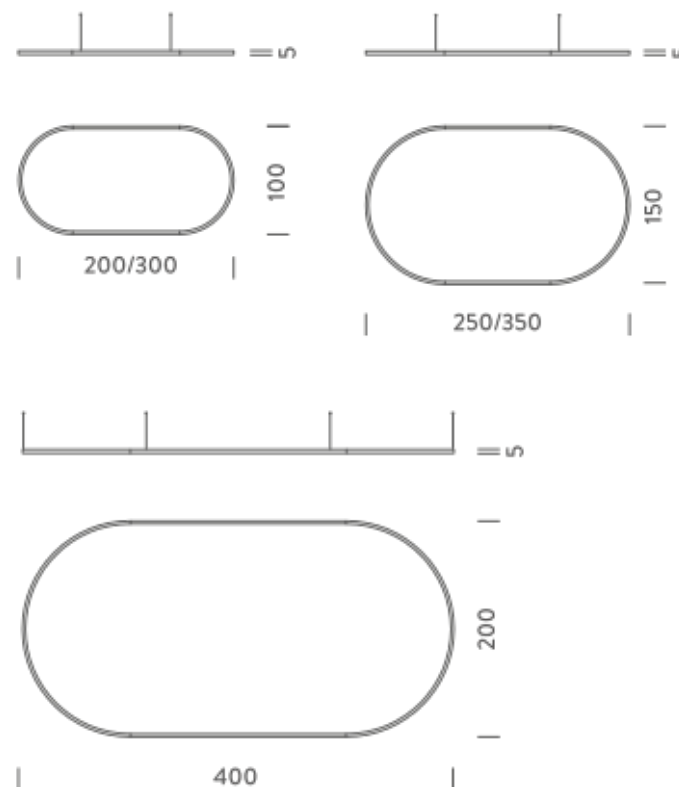

## 2,5X1,5M | UP - DOWNLIGHT - 2700K

### LAMPING

Source	Linear LED
Total power	193W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	11179lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	250x150x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 4x electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling
Net lamp weight	8,1 kg

### Codes

BZRO17B25G15DBO  
BZRO17B25G15DNE  
BZRO17B25G15DOR


### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 160x160x15 cm / Gross weight: 11,6 kg

### Certificazioni

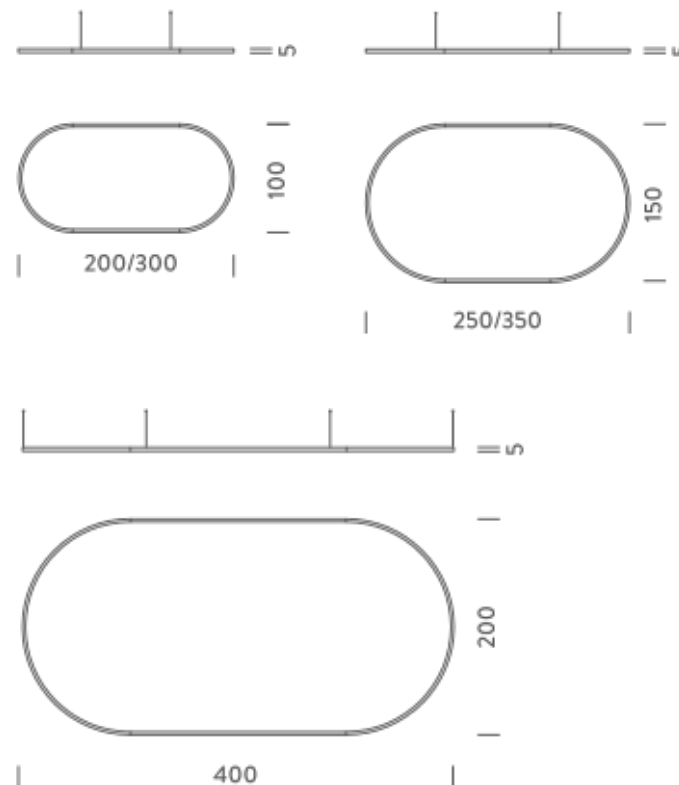

## 2,5X1,5M | DOWNLIGHT - 3000K

### LAMPING

Source	Linear LED
Total power	97W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	5918lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	250x150x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM150W24VIN, 1 dimmer interface WDIMDALIHP, 1x electrical cable 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling
Net lamp weight	7,3 kg

### Codes

BZRO16B25G15WBO  
BZRO16B25G15WNE  
BZRO16B25G15WOR

### Structure

white  
black  
gold


### PACKAGE

Package 01 Dimension: 160x160x15 cm / Gross weight: 10,8 kg

### Certificazioni



NEMO<sup>3,000</sup>

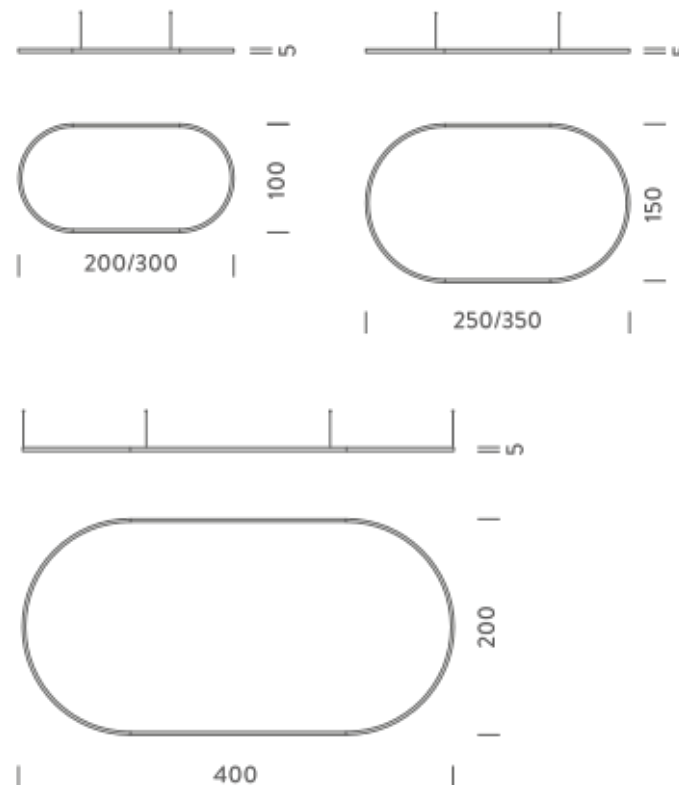



## 2,5X1,5M | UP - DOWNLIGHT - 3000K

### LAMPING

Source	Linear LED
Total power	193W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	11836lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	250x150x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 4x electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling
Net lamp weight	8,1 kg

### Codes

BZRO17B25G15WBO  
BZRO17B25G15WNE  
BZRO17B25G15WOR


### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 160x160x15 cm / Gross weight: 11,6 kg

### Certificazioni

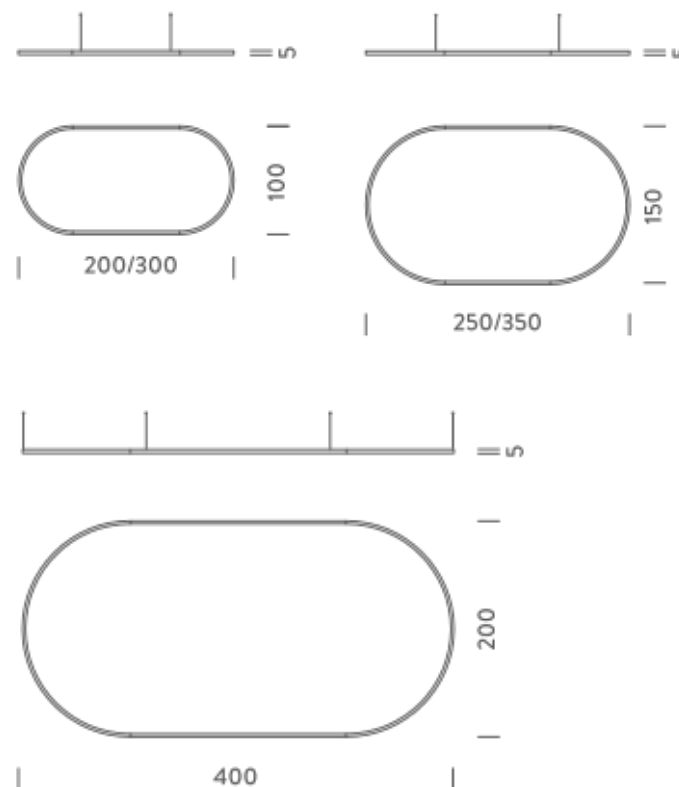

## 2,5X1,5M | DOWNLIGHT - 4000K

### LAMPING

Source	Linear LED
Total power	97W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	6576lm
Typ CRI	90
Energy class	D
IP class	40
Dimensions	250x150x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM150W24VIN, 1 dimmer interface WDIMDALIHP, 1x electrical cable 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling
Net lamp weight	7,3 kg

### Codes

BZRO16B25G15NBO  
BZRO16B25G15NNE  
BZRO16B25G15NOR

### Structure

white  
black  
gold


### PACKAGE

Package 01 Dimension: 160x160x15 cm / Gross weight: 10,8 kg

### Certificazioni



NEMO<sup>3,000</sup>

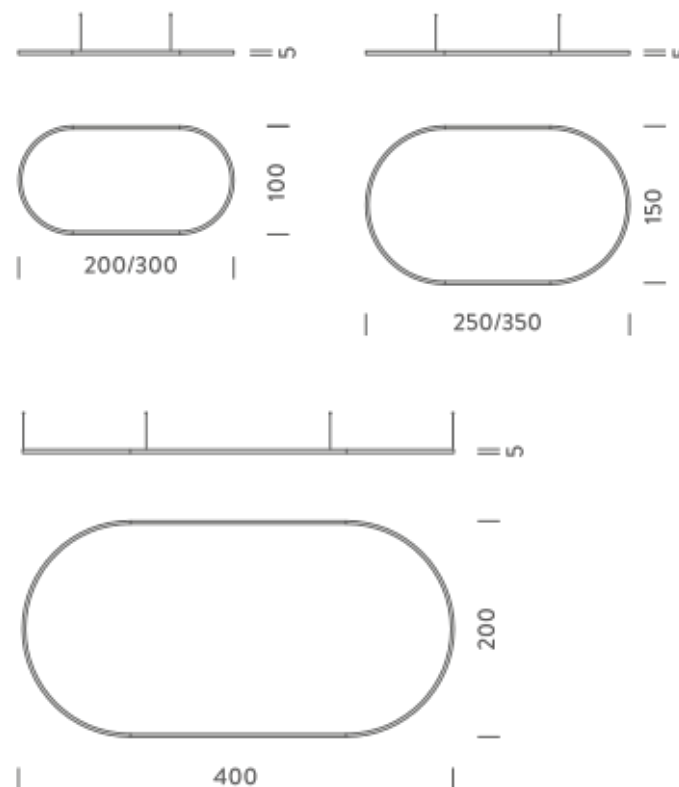

## 2,5X1,5M | UP - DOWNLIGHT - 4000K

### LAMPING

Source	Linear LED
Total power	193W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	13152lm
Typ CRI	90
Energy class	D
IP class	40
Dimensions	250x150x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 4x electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling
Net lamp weight	8,1 kg

### Codes

BZRO17B25G15NBO  
BZRO17B25G15NNE  
BZRO17B25G15NOR


### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 160x160x15 cm / Gross weight: 11,6 kg

### Certificazioni

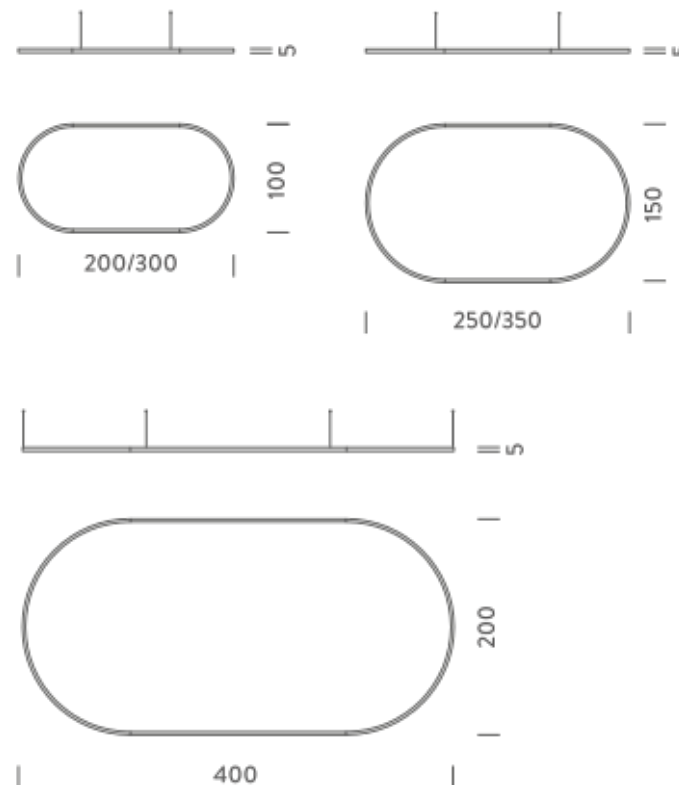

# 3,5X1,5M | DOWNLIGHT - 2700K

## LAMPING

Source	Linear LED
Total power	125W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	7255lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	350x150x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM150W24VIN, 1 dimmer interface WDIMDALIHP, 1x electrical cable 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling
Net lamp weight	9,1 kg

## Codes

BZRO16B35G15DBO  
BZRO16B35G15DNE  
BZRO16B35G15DOR

## Structure

white  
black  
gold


## PACKAGE

Package 01 Dimension: 210x110x15 cm / Gross weight: 14,5 kg

## Certificazioni



NEMO<sup>3,000</sup>

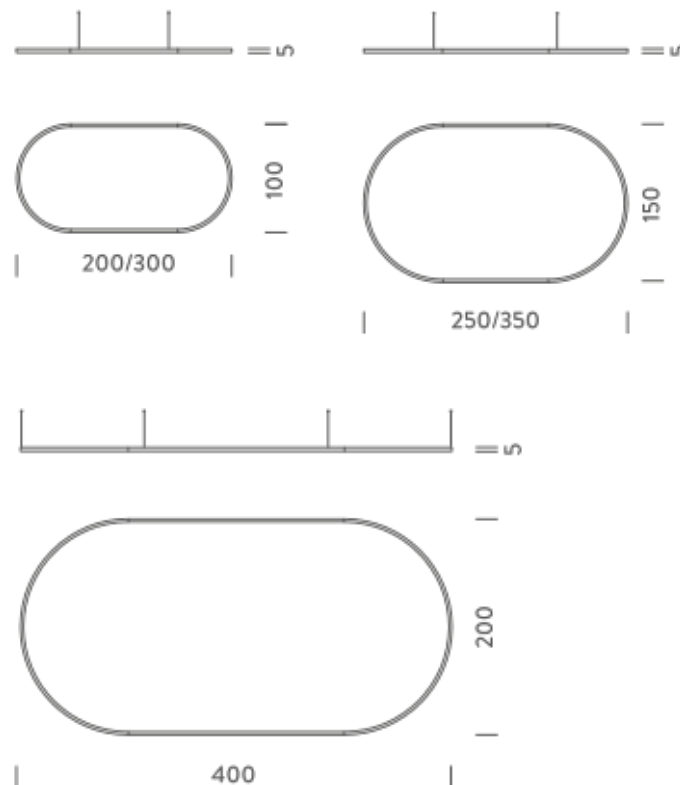

## 3,5X1,5M | UP - DOWNLIGHT - 2700K

### LAMPING

Source	Linear LED
Total power	251W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	14511lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	350x150x5cm
Materials	Aluminium
Notes	included: 2 drivers WALIM150W24VIN, 2x dimmer interface WDIMDALIHP, 4x electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling
Net lamp weight	9,9 kg

### Codes

BZRO17B35G15DBO  
BZRO17B35G15DNE  
BZRO17B35G15DOR


### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 210x110x15 cm / Gross weight: 15,3 kg

### Certificazioni

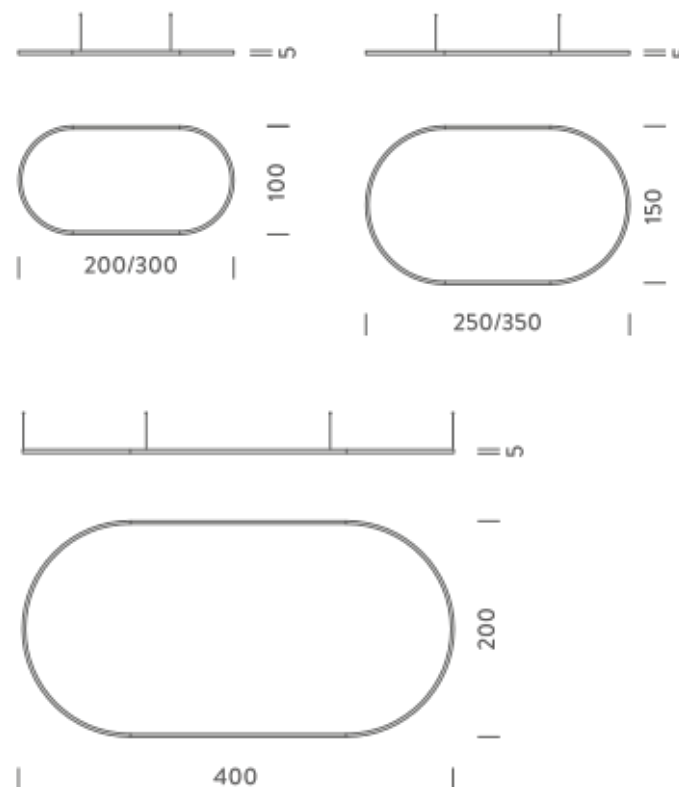

## 3,5X1,5M | DOWNLIGHT - 3000K

### LAMPING

Source	Linear LED
Total power	125W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	7682lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	350x150x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM150W24VIN, 1 dimmer interface WDIMDALIHP, 1x electrical cable 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling
Net lamp weight	9,1 kg

### Codes

BZRO16B35G15WBO  
BZRO16B35G15WNE  
BZRO16B35G15WOR

### Structure

white  
black  
gold


### PACKAGE

Package 01 Dimension: 210x110x15 cm / Gross weight: 14,5 kg

### Certificazioni



NEMO<sup>3,000</sup>

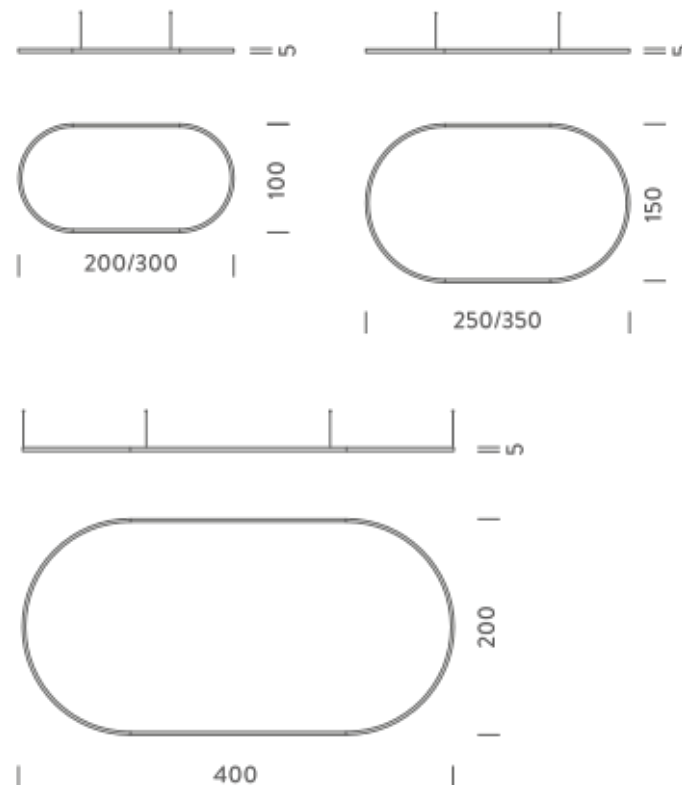

## 3,5X1,5M | UP - DOWNLIGHT - 3000K

### LAMPING

Source	Linear LED
Total power	251W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	15364lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	350x150x5cm
Materials	Aluminium
Notes	included: 2 drivers WALIM150W24VIN, 2x dimmer interface WDIMDALIHP, 4x electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling
Net lamp weight	9,9 kg

### Codes

BZRO17B35G15WBO  
BZRO17B35G15WNE  
BZRO17B35G15WOR


### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 210x110x15 cm / Gross weight: 15,3 kg

### Certificazioni

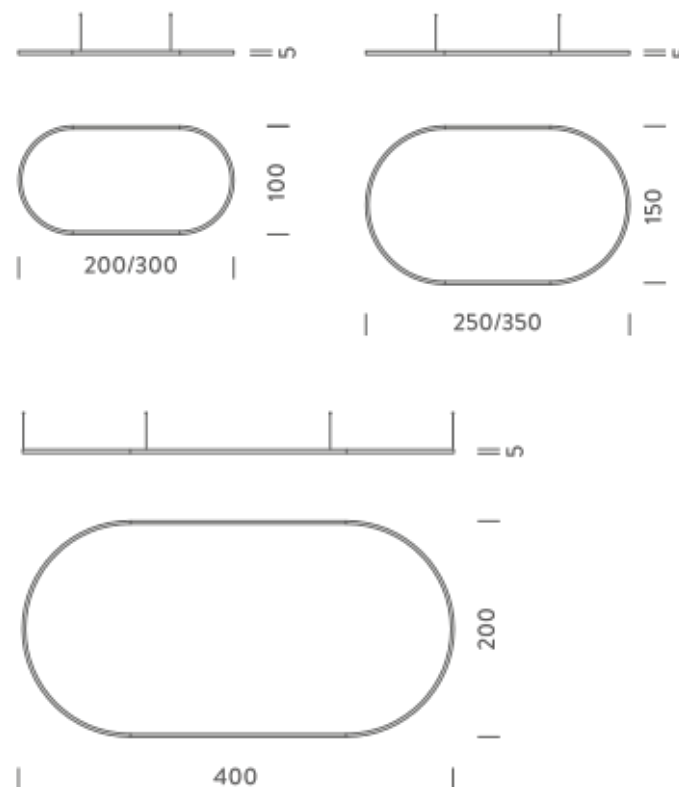

# 3,5X1,5M | DOWNLIGHT - 4000K

## LAMPING

Source	Linear LED
Total power	125W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	8536lm
Typ CRI	90
Energy class	D
IP class	40
Dimensions	350x150x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM150W24VIN, 1 dimmer interface WDIMDALIHP, 1x electrical cable 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling
Net lamp weight	9,1 kg

## Codes

BZRO16B35G15NBO  
BZRO16B35G15NNE  
BZRO16B35G15NOR

## Structure

white  
black  
gold


## PACKAGE

Package 01 Dimension: 210x110x15 cm / Gross weight: 14,5 kg

## Certificazioni



NEMO<sup>3,000</sup>

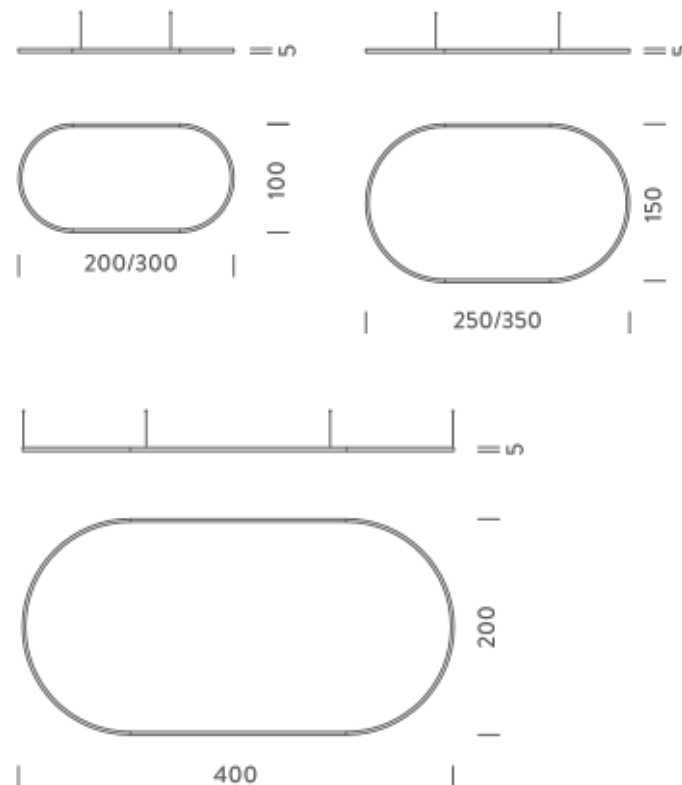



## 3,5X1,5M | UP - DOWNLIGHT - 4000K

### LAMPING

Source	Linear LED
Total power	251W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	17072lm
Typ CRI	90
Energy class	D
IP class	40
Dimensions	350x150x5cm
Materials	Aluminium
Notes	included: 2 drivers WALIM150W24VIN, 2x dimmer interface WDIMDALIHP, 4x electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling
Net lamp weight	9,9 kg

### Codes

BZRO17B35G15NBO  
BZRO17B35G15NNE  
BZRO17B35G15NOR


### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 210x110x15 cm / Gross weight: 15,3 kg

### Certificazioni

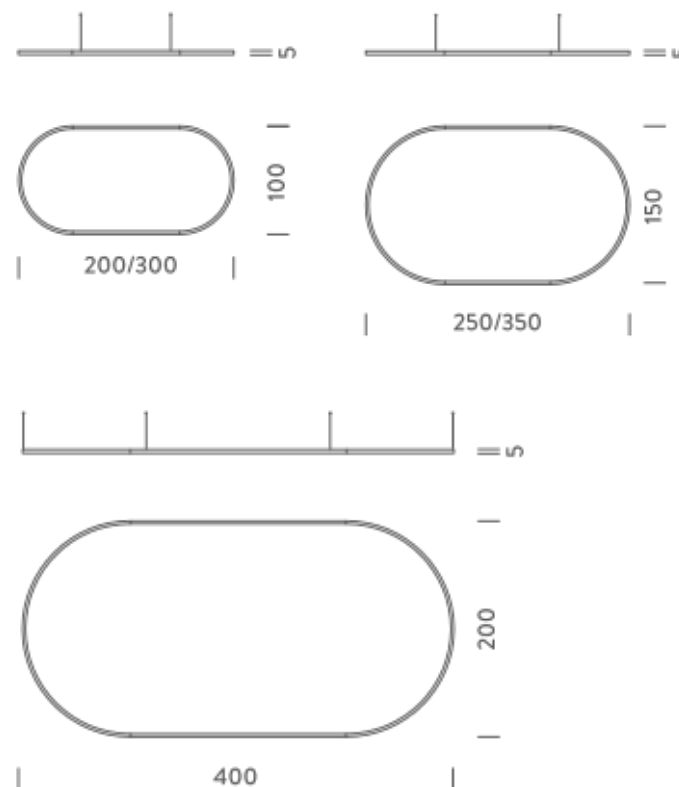

## 4X2M | DOWNLIGHT - 2700K

### LAMPING

Source	Linear LED
Total power	148W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	8536lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	400x200x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 4x electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling
Net lamp weight	11,4 kg

### Codes

BZRO16C40G15DBO  
BZRO16C40G15DNE  
BZRO16C40G15DOR


### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 210x110x15 cm / Gross weight: 16,8 kg

### Certificazioni

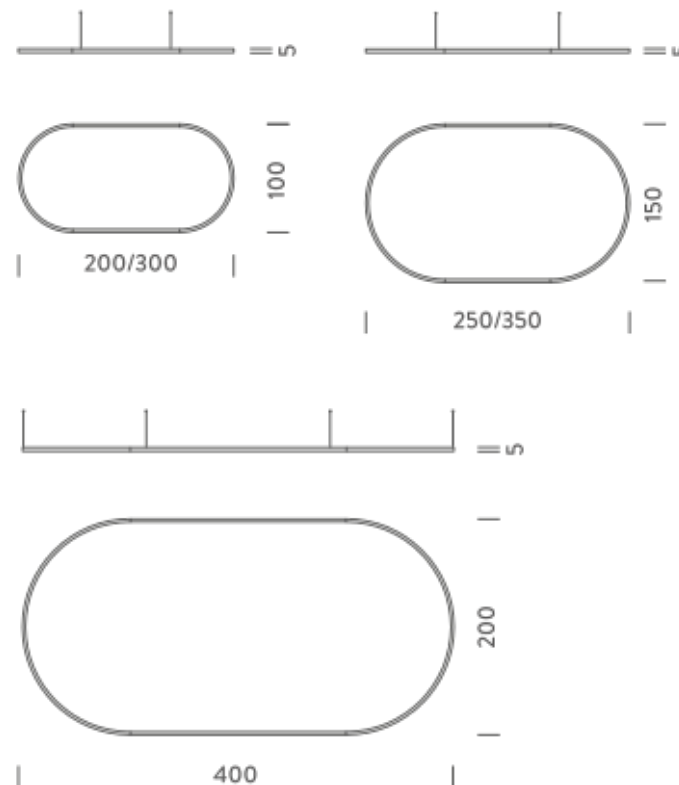

## 4X2M | UP - DOWNLIGHT - 2700K

### LAMPING

Source	Linear LED
Total power	296W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	17126lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	400x200x5cm
Materials	Aluminium
Notes	included: 2 driver2 WALIM150W24VIN, 2x dimmer interface WDIMDALIHP, 4x electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling
Net lamp weight	12,2 kg

### Codes

BZRO17C40G15DBO  
BZRO17C40G15DNE  
BZRO17C40G15DOR


### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 210x110x15 cm / Gross weight: 17,6 kg

### Certificazioni

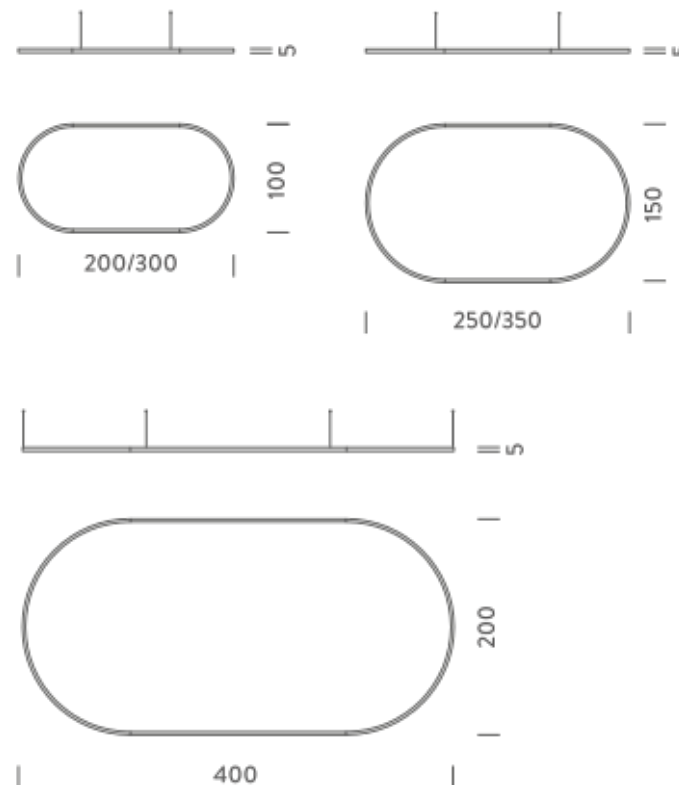

## 4X2M | DOWNLIGHT - 3000K

### LAMPING

Source	Linear LED
Total power	148W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	9067lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	400x200x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 4x electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling
Net lamp weight	11,4 kg

### Codes

BZRO16C40G15WBO  
BZRO16C40G15WNE  
BZRO16C40G15WOR


### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 210x110x15 cm / Gross weight: 16,8 kg

### Certificazioni

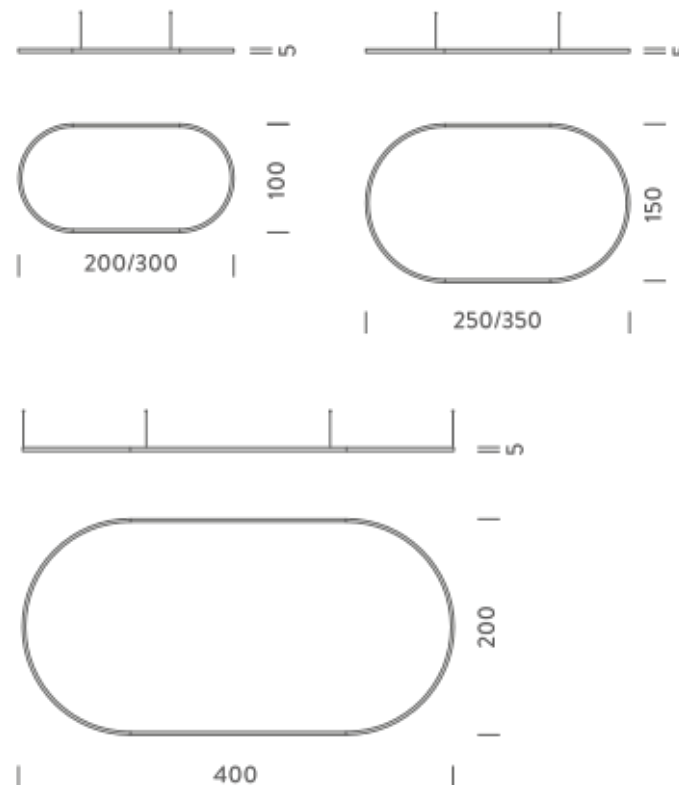

## 4X2M | UP - DOWNLIGHT - 3000K

### LAMPING

Source	Linear LED
Total power	296W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	18134lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	400x200x5cm
Materials	Aluminium
Notes	included: 2 drivers WALIM150W24VIN, 2x dimmer interface WDIMDALIHP, 4x electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling
Net lamp weight	12,2 kg

### Codes

BZRO17C40G15WBO  
BZRO17C40G15WNE  
BZRO17C40G15WOR


### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 210x110x15 cm / Gross weight: 17,6 kg

### Certificazioni

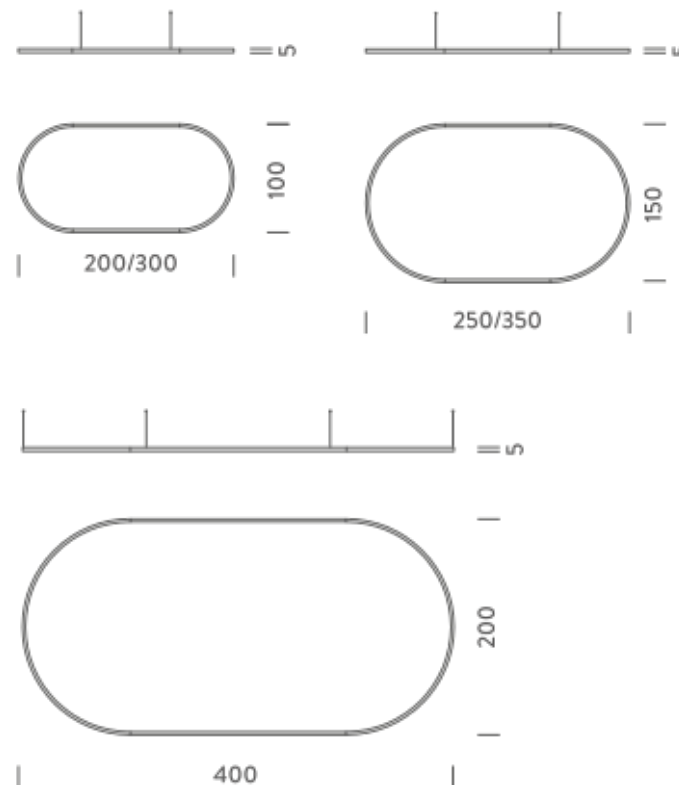

## 4X2M | DOWNLIGHT - 4000K

### LAMPING

Source	Linear LED
Total power	148W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	10074lm
Typ CRI	90
Energy class	D
IP class	40
Dimensions	400x200x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 4x electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling
Net lamp weight	11,4 kg

### Codes

BZRO16C40G15NBO  
BZRO16C40G15NNE  
BZRO16C40G15NOR


### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 210x110x15 cm / Gross weight: 16,8 kg

### Certificazioni

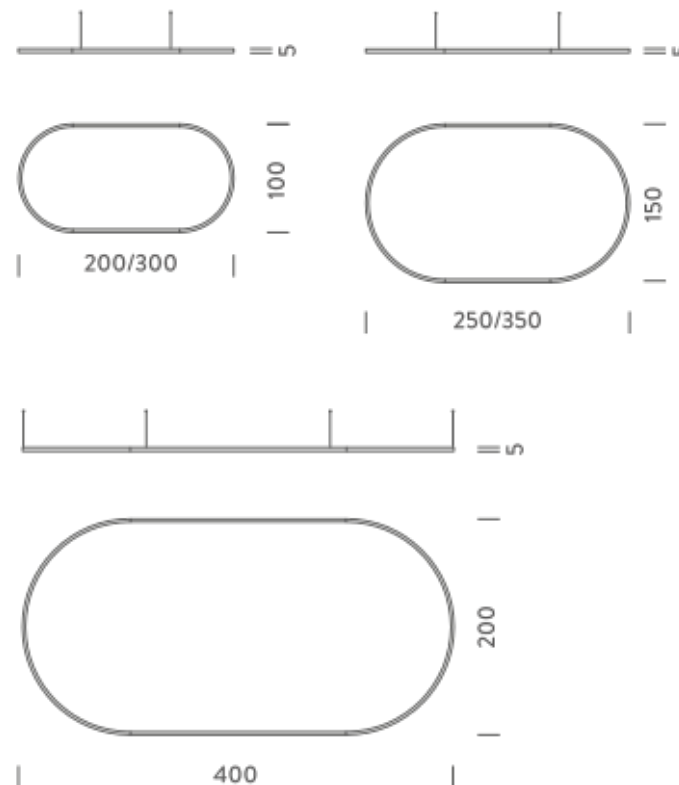

## 4X2M | UP - DOWNLIGHT - 4000K

### LAMPING

Source	Linear LED
Total power	296W
Emission	Diffused orientable
Switching	DALI 1-100V
Tension	220/240V
Color temperature	4000K
Luminous flux	20149lm
Typ CRI	90
Energy class	D
IP class	40
Dimensions	400x200x5cm
Materials	Aluminium
Notes	included: 2 drivers WALIM150W24VIN, 2x dimmer interface WDIMDALIHP, 4x electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling
Net lamp weight	12,2 kg

### Codes

BZRO17C40G15NBO  
BZRO17C40G15NNE  
BZRO17C40G15NOR

### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 210x110x15 cm / Gross weight: 17,6 kg

### Certificazioni

