


# ZIRKOL SQUARE

ZIRKOL – S ist eine Familie von polygonalen Hängeleuchten, die sich ideal für die allgemeine und dekorative Beleuchtung von Räumen eignen. Gehäuse aus eloxiertem Aluminium und Opalschutz für homogene Beleuchtung. Direkte oder doppelte Lichtemission mit hohem Lichtstrom und mit drei verschiedenen Farbtemperaturen. Fernspeisung im Lieferumfang.

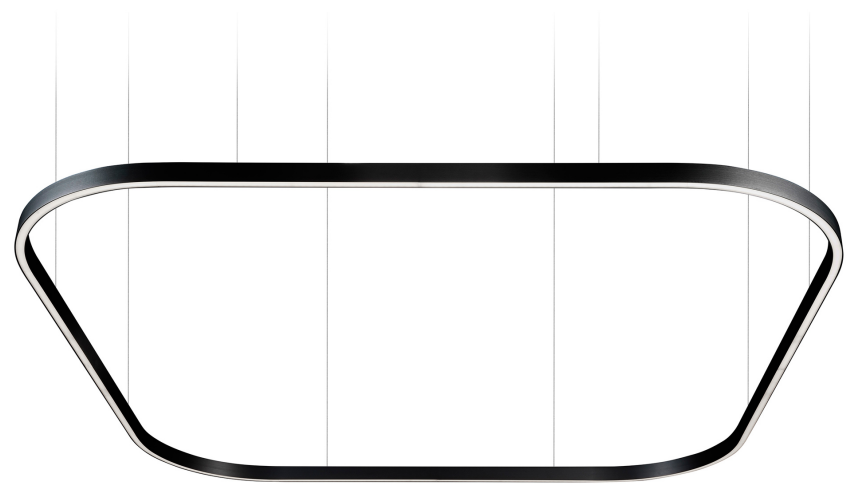

# 1,5X1,5M | DOWNLIGHT - 2700K

## LAMPING

Source	Linear LED
Total power	77W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	110/240V
Color temperature	2700K
Luminous flux	4432lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	150x150x5cm
Materials	Aluminium
Notes	included: 1 driver WALIMLED100/24, 1 dimmer interface WDIMDALIHP, 1 electrical cable 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped assembled
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling
Net lamp weight	6,1 kg

## Codes

BZRQ1606G15DBO  
BZRQ1606G15DNE  
BZRQ1606G15DOR


## PACKAGE

Package 01 Dimension: 160x160x15 cm / Gross weight: 9,6 kg

## Certificazioni



NEMO 3.000

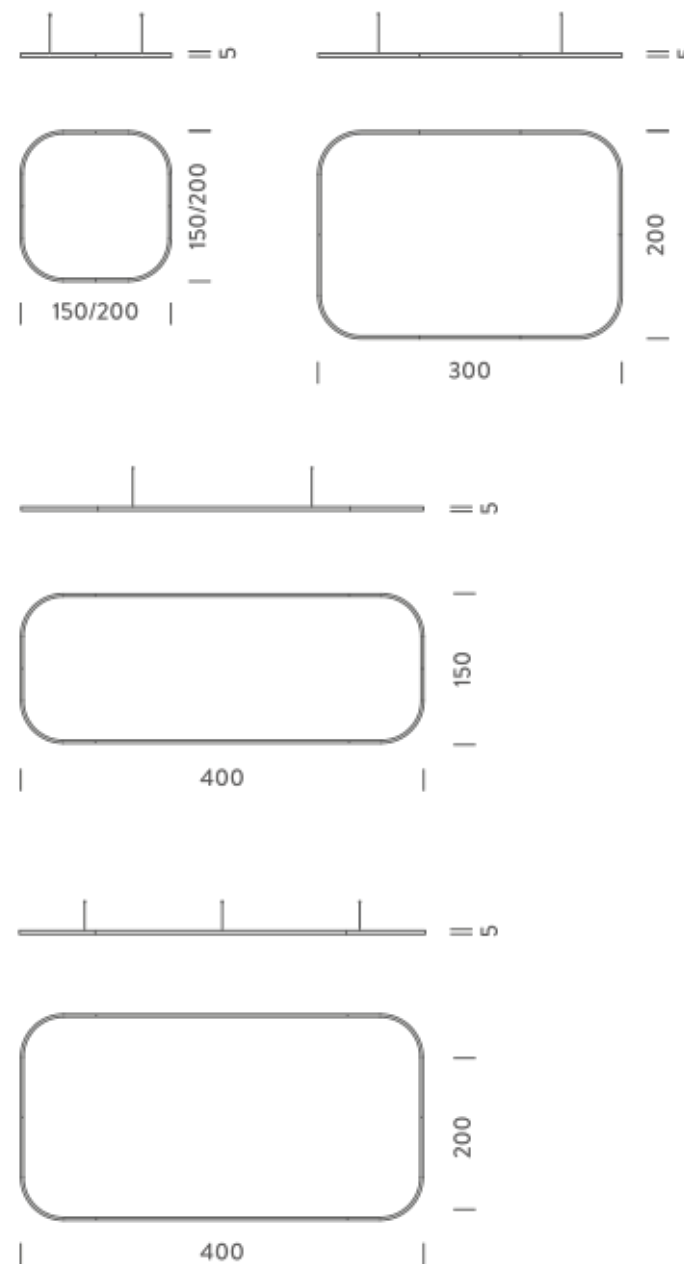

# 1,5X1,5M | UP - DOWNLIGHT - 2700K

## LAMPING

Source	Linear LED
Total power	154W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	8863lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	150x150x5cm
Materials	Aluminium
Notes	

included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 1 electrical cable 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped assembled

## Customization options

Shapes, sizes

## Accessories

Canopy, for concrete ceiling | Canopy box, 1 driver, 1 electrical cable | Ceiling plate, for false ceiling

## Net lamp weight

6,1 kg

## Codes

BZRQ1712G15DBO  
BZRQ1712G15DNE  
BZRQ1712G15DOR

## Structure

white  
black  
gold

## PACKAGE


Package 01

Dimension: 160x160x15 cm / Gross weight: 9,6 kg

## Certificazioni



NEMO 3.000

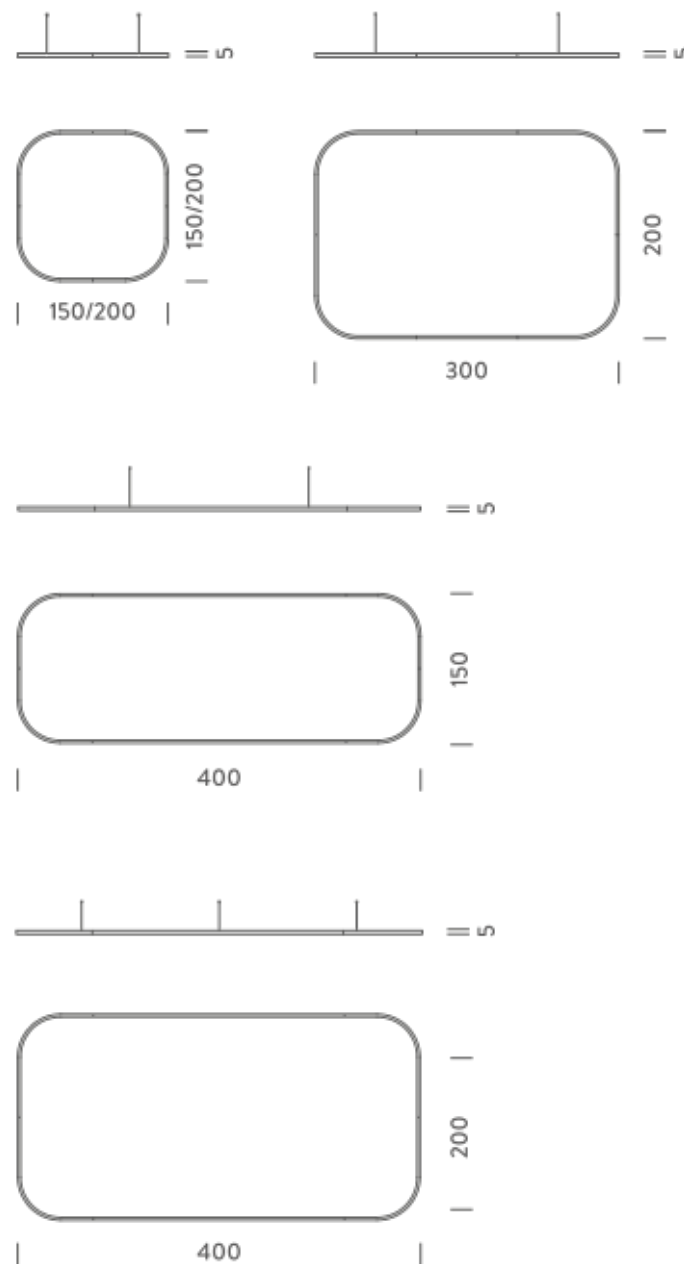

# 1,5X1,5M | DOWNLIGHT - 3000K

## LAMPING

Source	Linear LED
Total power	77W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	110/240V
Color temperature	3000K
Luminous flux	4692lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	150x150x5cm
Materials	Aluminium
Notes	included: 1 driver WALIMLED100/24, 1 dimmer interface WDIMDALIHP, 1 electrical cable 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped assembled
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling
Net lamp weight	6,1 kg

## Codes

BZRQ1606G15WBO  
BZRQ1606G15WNE  
BZRQ1606G15WOR


## PACKAGE

Package 01 Dimension: 160x160x15 cm / Gross weight: 9,6 kg

## Certificazioni



NEMO<sup>3.000</sup>

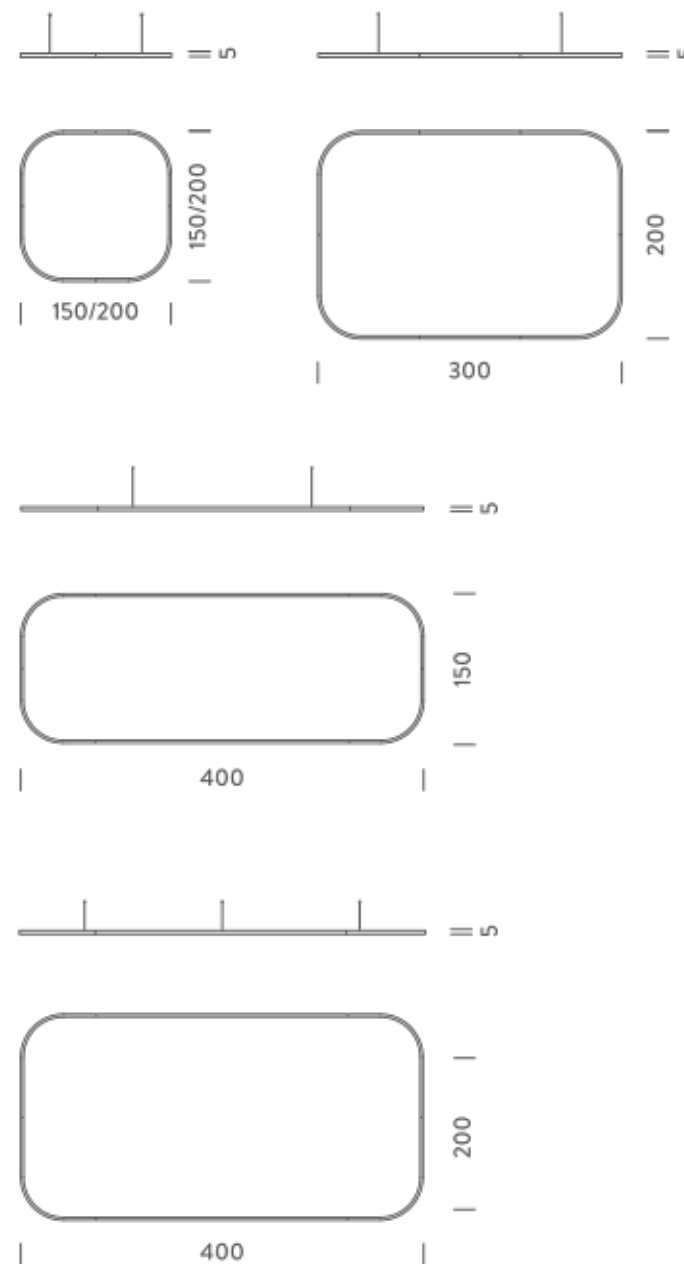

# 1,5X1,5M | UP - DOWNLIGHT - 3000K

## LAMPING

Source	Linear LED
Total power	154W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	9384lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	150x150x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 1 electrical cable 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped assembled
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling
Net lamp weight	6,1 kg

## Codes

BZRQ1712G15WBO  
BZRQ1712G15WNE  
BZRQ1712G15WOR


## PACKAGE

Package 01

## Structure

white  
black  
gold

Dimension: 160x160x15 cm / Gross weight: 9,6 kg

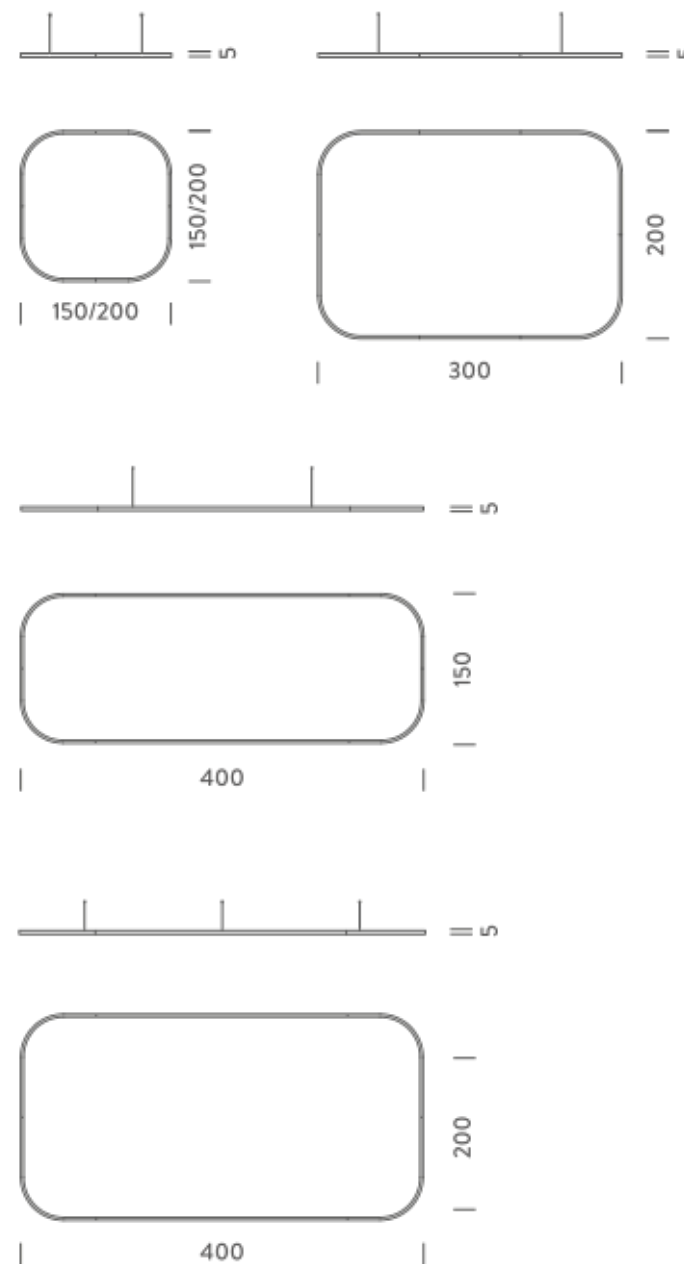

## Certificazioni



NEMO 3.000

# 1,5X1,5M | DOWNLIGHT - 4000K

## LAMPING

Source	Linear LED
Total power	77W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	110/240V
Color temperature	4000K
Luminous flux	5214lm
Typ CRI	90
Energy class	D
IP class	40
Dimensions	150x150x5cm
Materials	Aluminium
Notes	included: 1 driver WALIMLED100/24, 1 dimmer interface WDIMDALIHP, 1 electrical cable 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped assembled
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling
Net lamp weight	6,1 kg

## Codes

BZRQ1606G15NBO  
BZRQ1606G15NNE  
BZRQ1606G15NOR


## PACKAGE

Package 01

## Structure

white  
black  
gold

Dimension: 160x160x15 cm / Gross weight: 9,6 kg

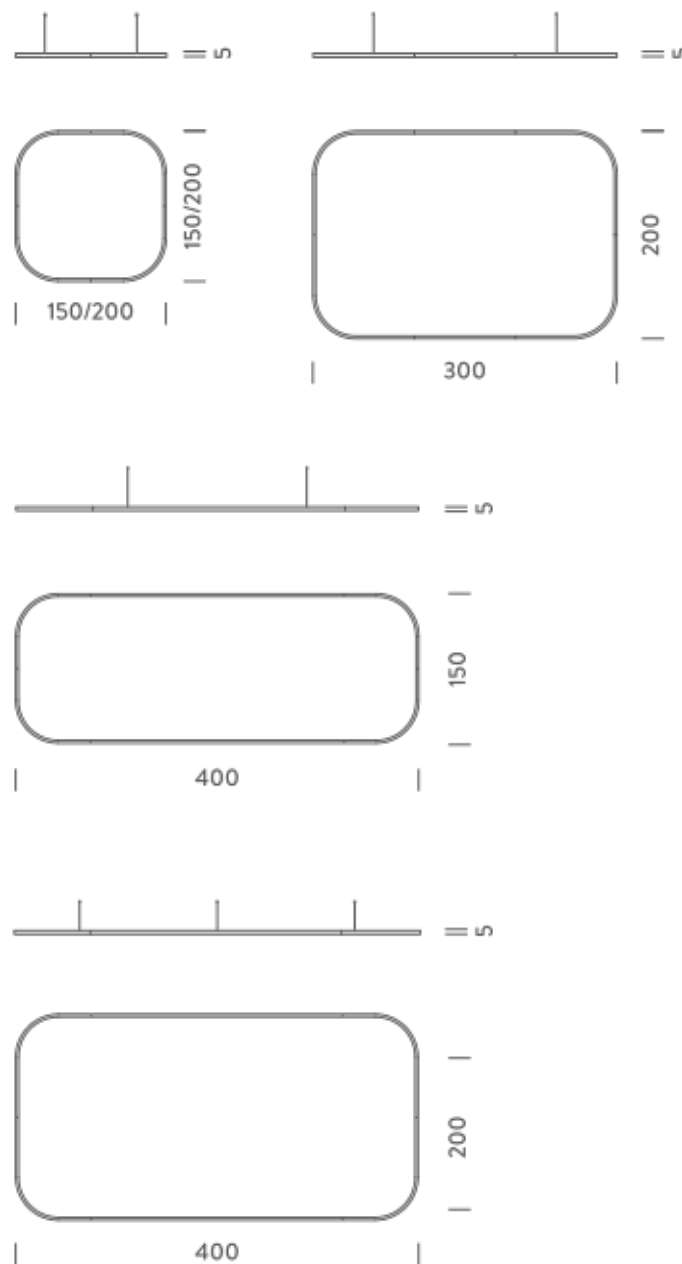

## Certificazioni



NEMO 3.000

# 1,5X1,5M | UP - DOWNLIGHT - 4000K

## LAMPING

Source	Linear LED
Total power	154W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	10427lm
Typ CRI	90
Energy class	D
IP class	40
Dimensions	150x150x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 1 electrical cable 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped assembled
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling
Net lamp weight	6,1 kg

## Codes

BZRQ1712G15NBO  
BZRQ1712G15NNE  
BZRQ1712G15NOR


## PACKAGE

Package 01

## Structure

white  
black  
gold

Dimension: 160x160x15 cm / Gross weight: 9,6 kg

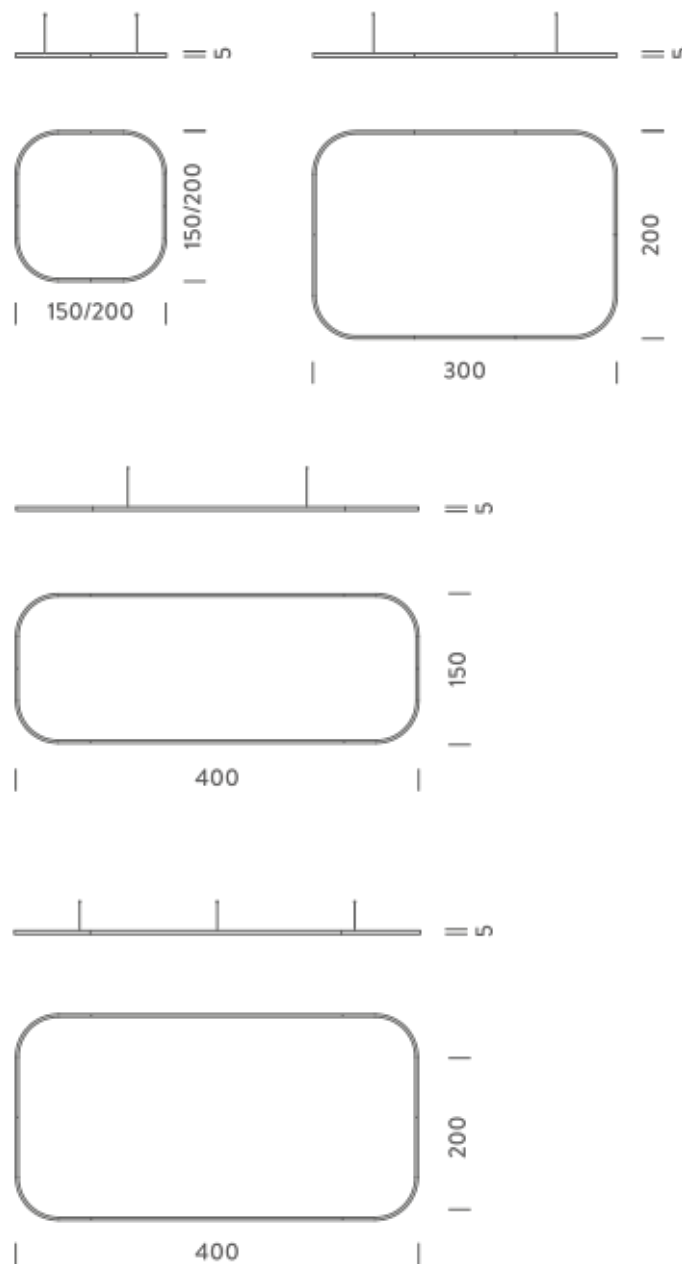

## Certificazioni



NEMO s.p.a.

## 2X2M | DOWNLIGHT - 2700KE

### LAMPING

Source	Linear LED
Total power	105W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	6098lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	200x200x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM150W24VIN, 1 dimmer interface WDIMDALIHP, 1 electrical cable 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling
Net lamp weight	7,8 kg

### Codes

BZRQ1608G15DBO  
BZRQ1608G15DNE  
BZRQ1608G15DOR


### PACKAGE

Package 01 Dimension: 210x110x15 cm / Gross weight: 13,2 kg

### Certificazioni



NEMO<sup>3,000</sup>

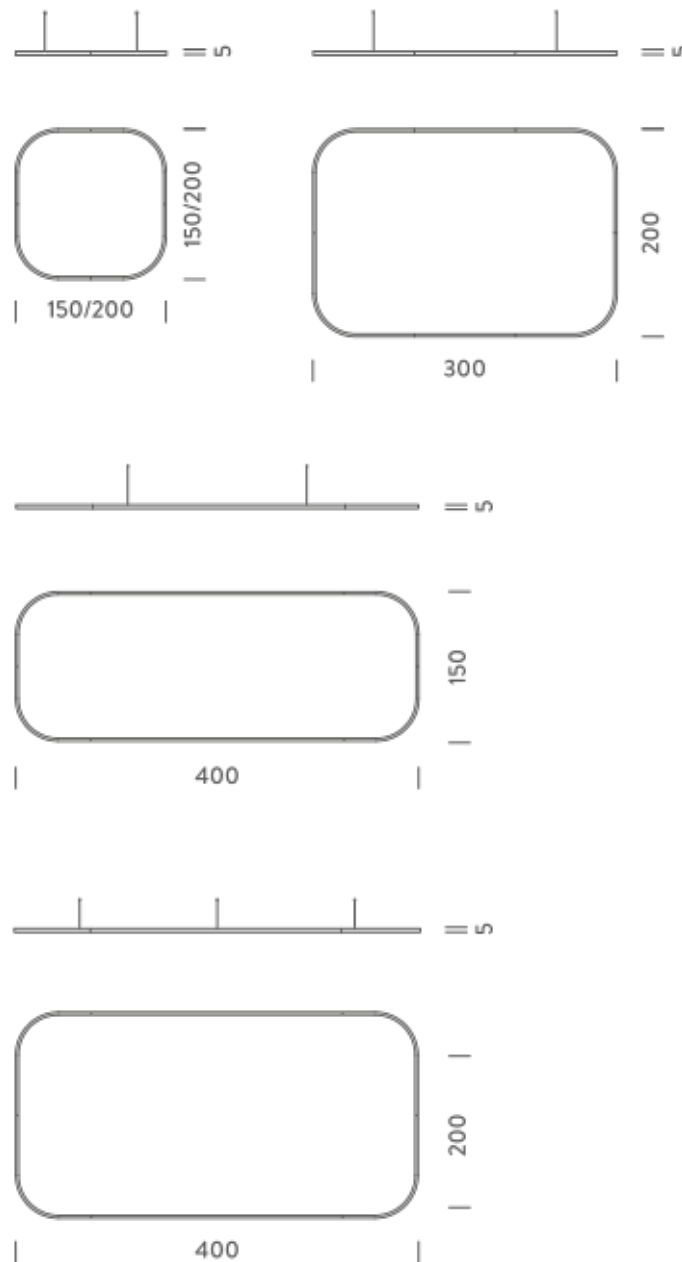



## 2X2M | UP - DOWNLIGHT - 2700K

### LAMPING

Source	Linear LED
Total power	211W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	12195lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	200x200x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 2 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces

### Customization options

### Accessories

### Net lamp weight

### Codes

BZRQ1716G15DBO  
BZRQ1716G15DNE  
BZRQ1716G15DOR

### Shapes, sizes

Canopy, for concrete ceiling | Canopy box, 1 driver, 2 electrical cables | Ceiling plate, for false ceiling

8,1 kg

### Structure

white  
black  
gold

### PACKAGE


Package 01

Dimension: 210x110x15 cm / Gross weight: 13,5 kg

### Certificazioni



NEMO<sup>3.000</sup>

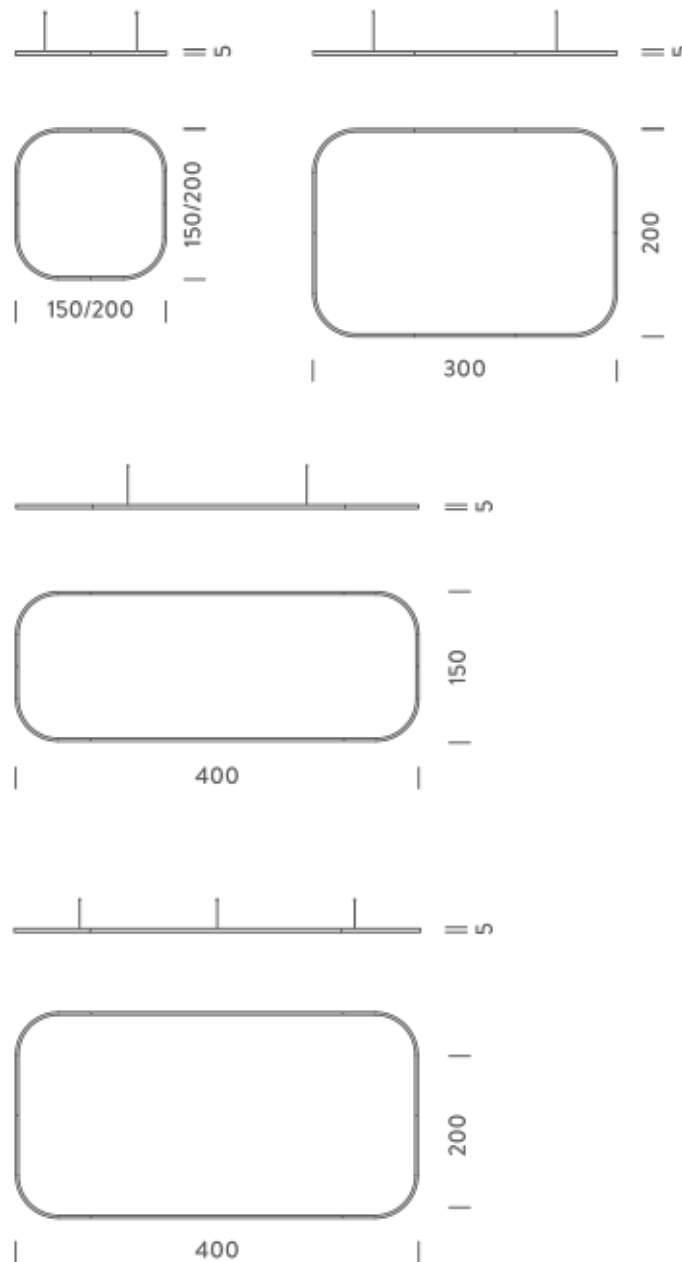

## 2X2M | DOWNLIGHT - 3000K

### LAMPING

Source	Linear LED
Total power	105W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	6456lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	200x200x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM150W24VIN, 1 dimmer interface WDIMDALIHP, 1 electrical cable 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling
Net lamp weight	7,8 kg

### Codes

BZRQ1608G15WBO  
BZRQ1608G15WNE  
BZRQ1608G15WOR


### PACKAGE

Package 01 Dimension: 210x110x15 cm / Gross weight: 13,2 kg

### Certificazioni



NEMO<sup>3,000</sup>

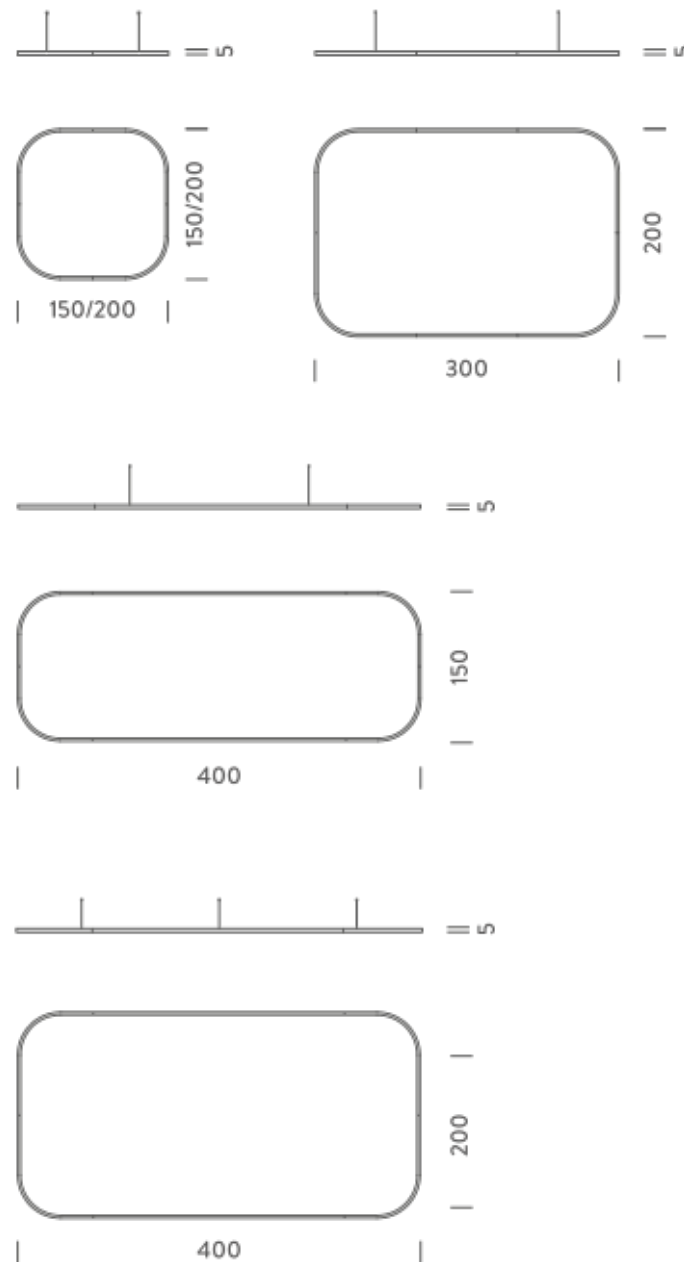

## 2X2M | UP - DOWNLIGHT - 3000K

### LAMPING

Source	Linear LED
Total power	211W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	12912lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	200x200x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 2 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 2 electrical cables   Ceiling plate, for false ceiling
Net lamp weight	8,1 kg

### Codes

BZRQ1716G15WBO  
BZRQ1716G15WNE  
BZRQ1716G15WOR


### PACKAGE

Package 01 Dimension: 210x110x15 cm / Gross weight: 13,5 kg

### Certificazioni



NEMO s.p.a.

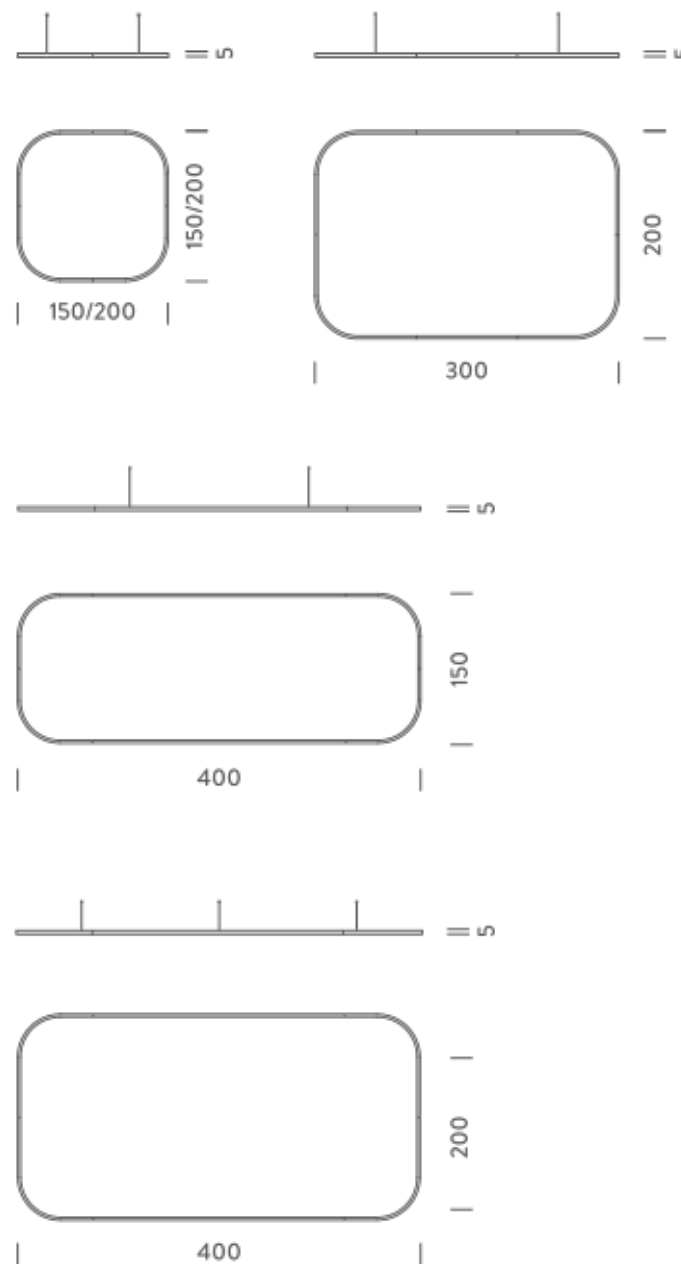

## 2X2M | DOWNLIGHT - 4000K

### LAMPING

Source	Linear LED
Total power	105W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	7174lm
Typ CRI	90
Energy class	D
IP class	40
Dimensions	200x200x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM150W24VIN, 1 dimmer interface WDIMDALIHP, 1 electrical cable 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling
Net lamp weight	7,8 kg

### Codes

BZRQ1608G15NBO  
BZRQ1608G15NNE  
BZRQ1608G15NOR


### PACKAGE

Package 01 Dimension: 210x110x15 cm / Gross weight: 13,2 kg

### Certificazioni



NEMO<sup>3,000</sup>

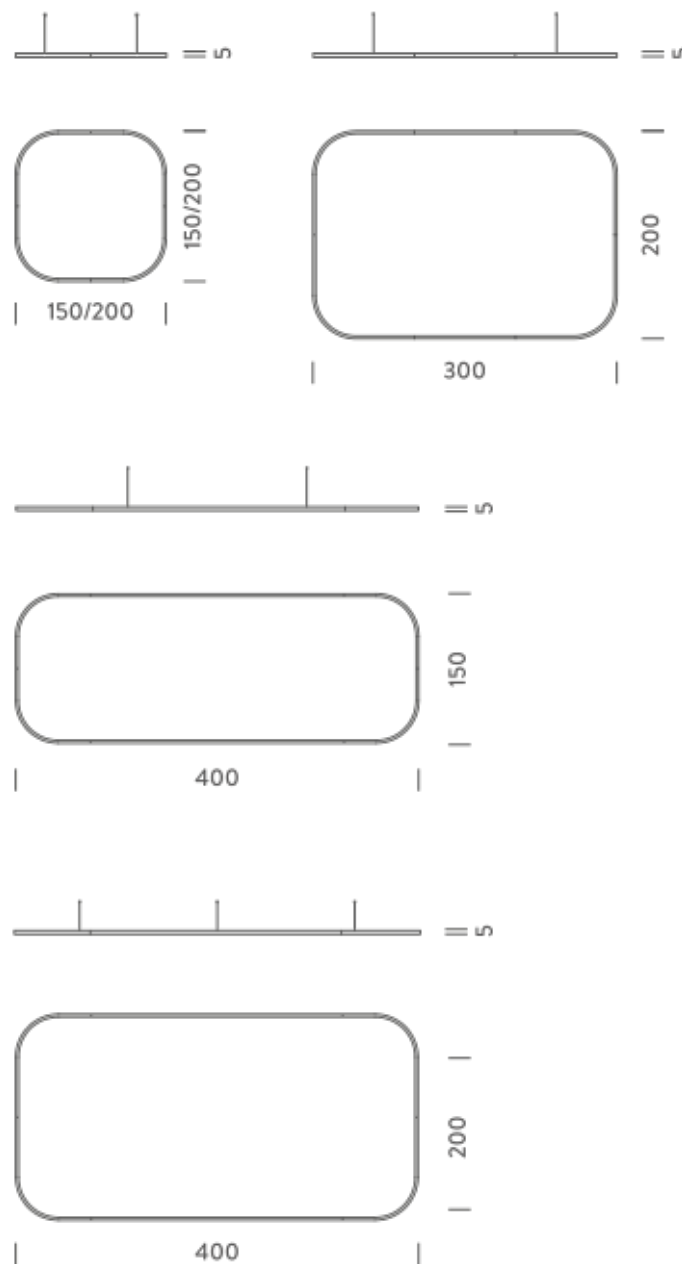

## 2X2M | UP - DOWNLIGHT - 4000K

### LAMPING

Source	Linear LED
Total power	211W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	14347lm
Typ CRI	90
Energy class	D
IP class	40
Dimensions	200x200x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 2 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 2 electrical cables   Ceiling plate, for false ceiling
Net lamp weight	8,1 kg

### Codes

BZRQ1716G15NBO  
BZRQ1716G15NNE  
BZRQ1716G15NOR

### PACKAGE

Package 01 Dimension: 210x110x15 cm / Gross weight: 13,5 kg


### Certificazioni



NEMO<sup>lighting</sup>

### Structure

white  
black  
gold

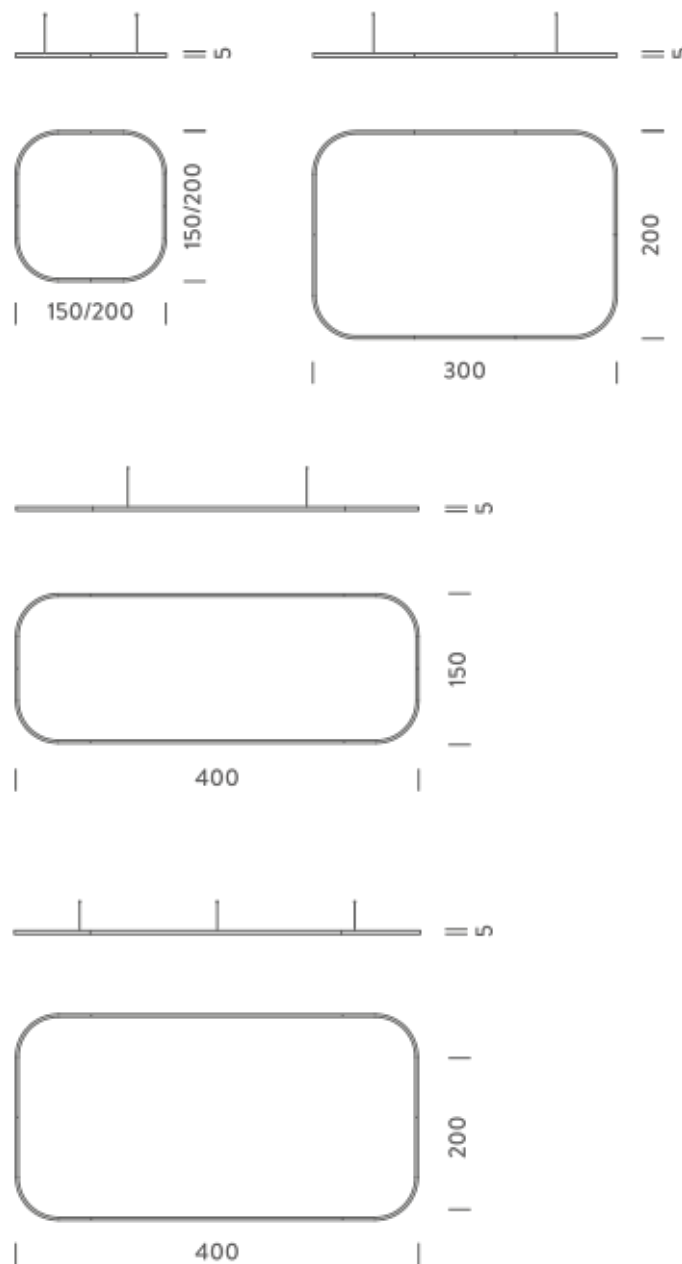

## 3X2M | DOWNLIGHT - 2700K

### LAMPING

Source	Linear LED
Total power	134W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	7764lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	300x200x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM150W24VIN, 1 dimmer interface WDIMDALIHP, 2 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 2 electrical cables   Ceiling plate, for false ceiling
Net lamp weight	9,9 kg

### Codes

BZRQ1610G15DBO  
BZRQ1610G15DNE  
BZRQ1610G15DOR


### PACKAGE

Package 01 Dimension: 310x110x15 cm / Gross weight: 17,9 kg

### Certificazioni



NEMO<sup>3.000</sup>

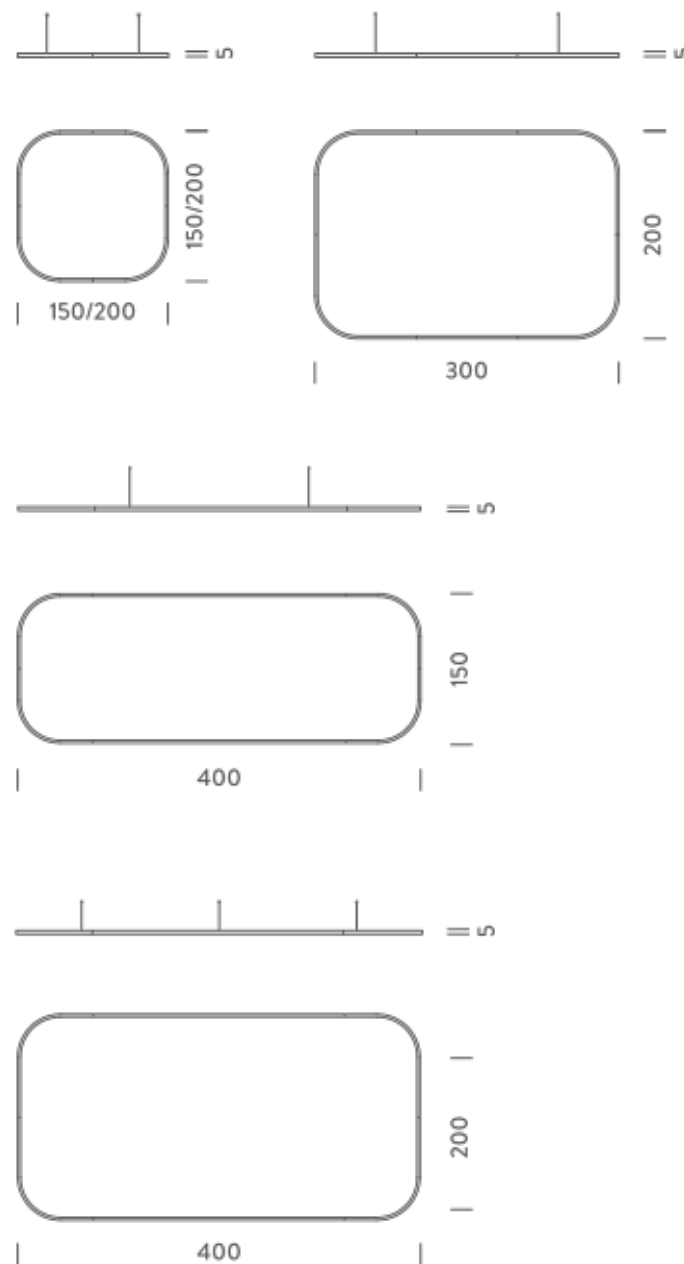

## 3X2M | UP - DOWNLIGHT - 2700K

### LAMPING

Source	Linear LED
Total power	268W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	15527lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	300x200x5cm
Materials	Aluminium
Notes	included: 2 drivers WALIM150W24VIN, 2x dimmer interface WDIMDALIHP, 2 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling
Net lamp weight	10,7 kg

### Codes

BZRQ1720G15DBO  
BZRQ1720G15DNE  
BZRQ1720G15DOR


### PACKAGE

Package 01

### Structure

white  
black  
gold

Dimension: 310x110x15 cm / Gross weight: 18,7 kg

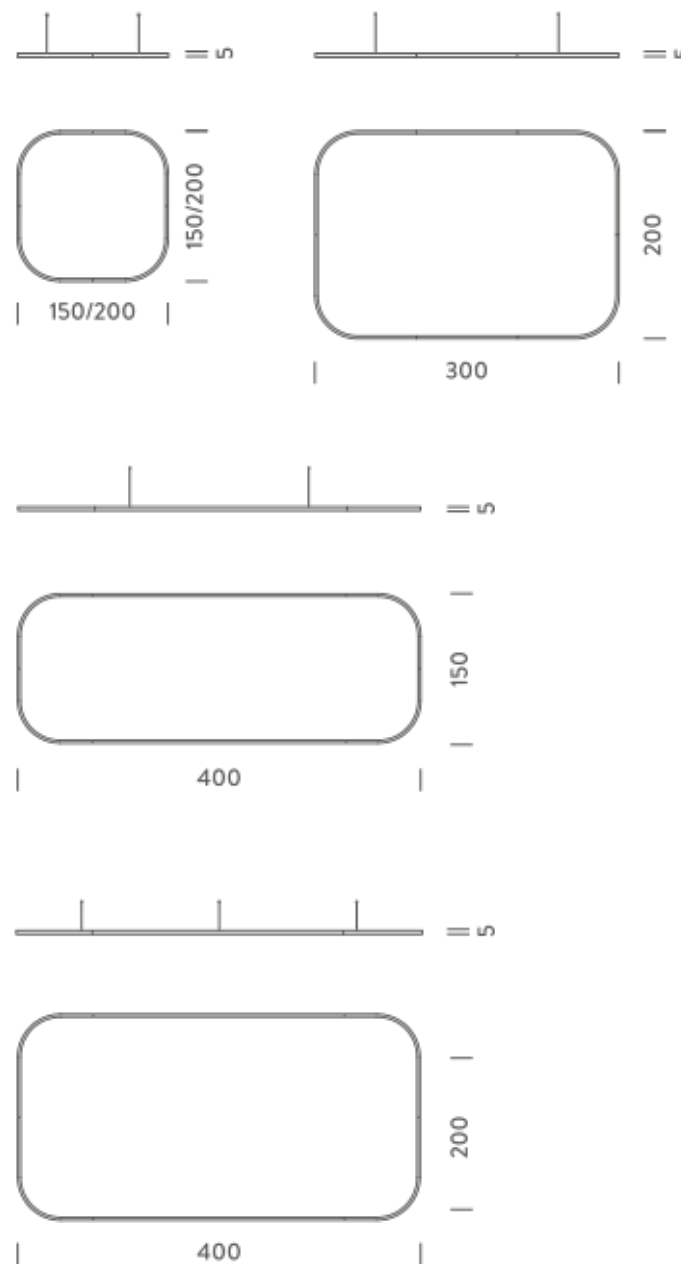

### Certificazioni



NEMO

## 3X2M | DOWNLIGHT - 3000K

### LAMPING

Source	Linear LED
Total power	134W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	8220lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	300x200x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM150W24VIN, 1 dimmer interface WDIMDALIHP, 2 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 2 electrical cables   Ceiling plate, for false ceiling
Net lamp weight	9,9 kg

### Codes

BZRQ1610G15WBO  
BZRQ1610G15WNE  
BZRQ1610G15WOR


### PACKAGE

Package 01

### Structure

white  
black  
gold

Dimension: 310x110x15 cm / Gross weight: 17,9 kg

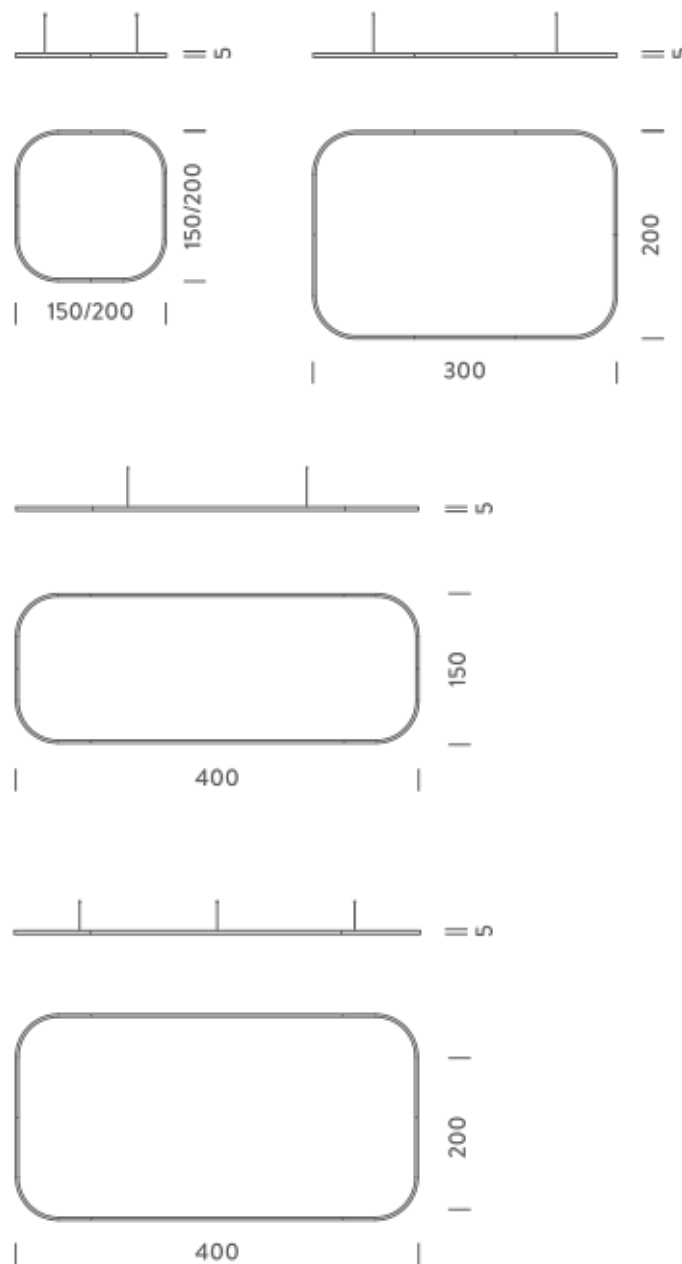

### Certificazioni



NEMO



## 3X2M | UP - DOWNLIGHT - 3000K

### LAMPING

Source	Linear LED
Total power	268W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	16440lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	300x200x5cm
Materials	Aluminium
Notes	included: 2 drivers WALIM150W24VIN, 2x dimmer interface WDIMDALIHP, 2 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling
Net lamp weight	10,7 kg

### Codes

BZRQ1720G15WBO  
BZRQ1720G15WNE  
BZRQ1720G15WOR


### PACKAGE

Package 01 Dimension: 310x110x15 cm / Gross weight: 18,7 kg

### Certificazioni



NEMO 3.000

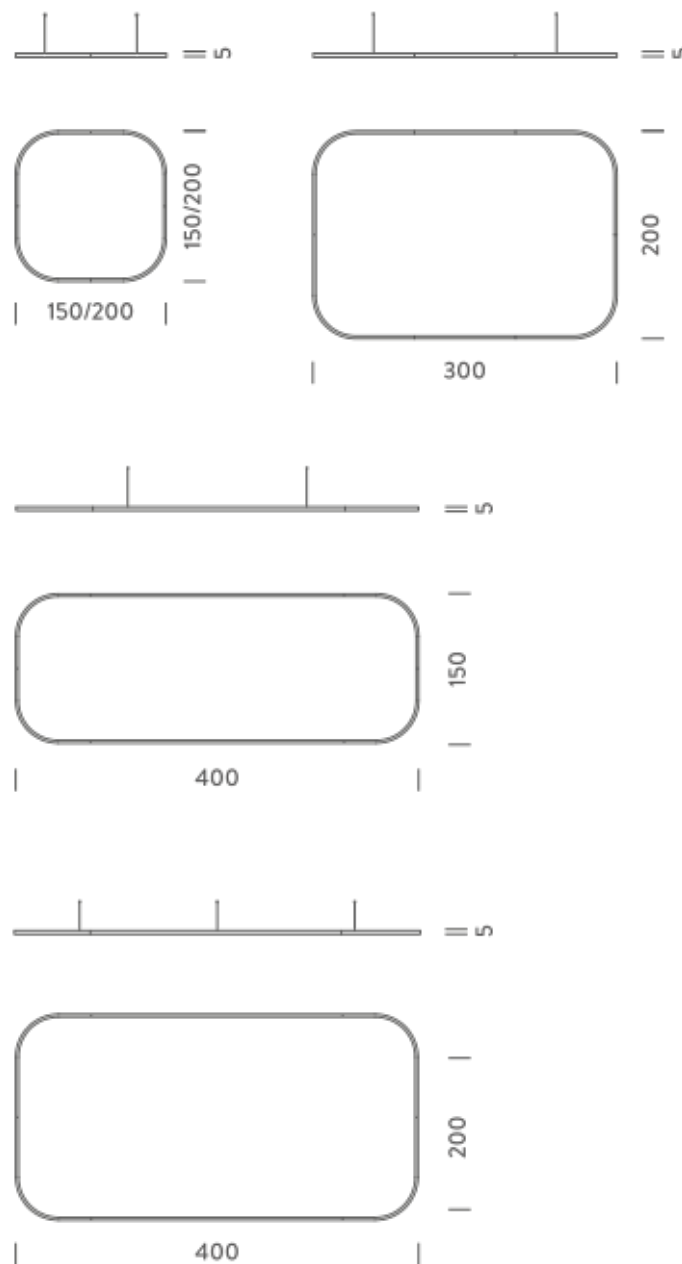

## 3X2M | DOWNLIGHT - 4000K

### LAMPING

Source	Linear LED
Total power	134W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	9134lm
Typ CRI	90
Energy class	D
IP class	40
Dimensions	300x200x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM150W24VIN, 1 dimmer interface WDIMDALIHP, 2 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 2 electrical cables   Ceiling plate, for false ceiling
Net lamp weight	9,9 kg

### Codes

BZRQ1610G15NBO  
BZRQ1610G15NNE  
BZRQ1610G15NOR


### PACKAGE

Package 01 Dimension: 310x110x15 cm / Gross weight: 17,9 kg

### Certificazioni



NEMO<sup>3.000</sup>

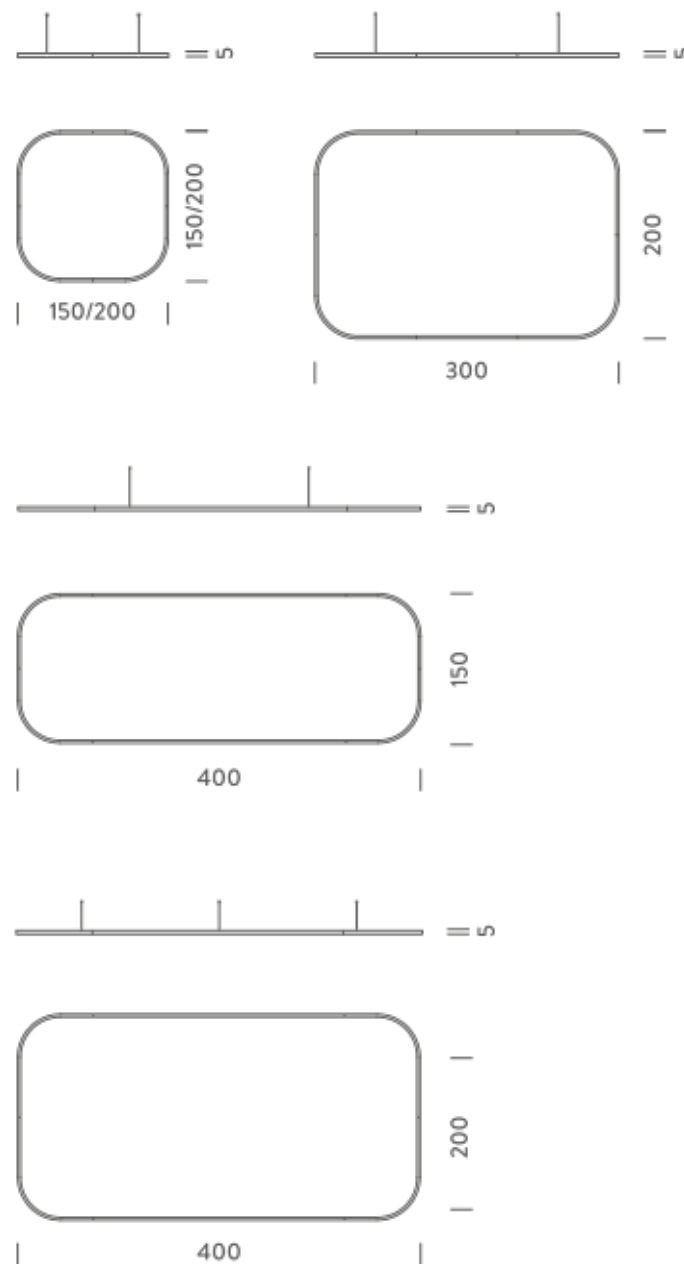

## 3X2M | UP - DOWNLIGHT - 4000K

### LAMPING

Source	Linear LED
Total power	268W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	18267lm
Typ CRI	90
Energy class	D
IP class	40
Dimensions	300x200x5cm
Materials	Aluminium
Notes	included: 2 drivers WALIM150W24VIN, 2x dimmer interface WDIMDALIHP, 2 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 2 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling
Net lamp weight	10,7 kg

### Codes

BZRQ1720G15NBO  
BZRQ1720G15NNE  
BZRQ1720G15NOR

### PACKAGE


Package 01

### Structure

white  
black  
gold

Dimension: 310x110x15 cm / Gross weight: 18,7 kg

### Certificazioni

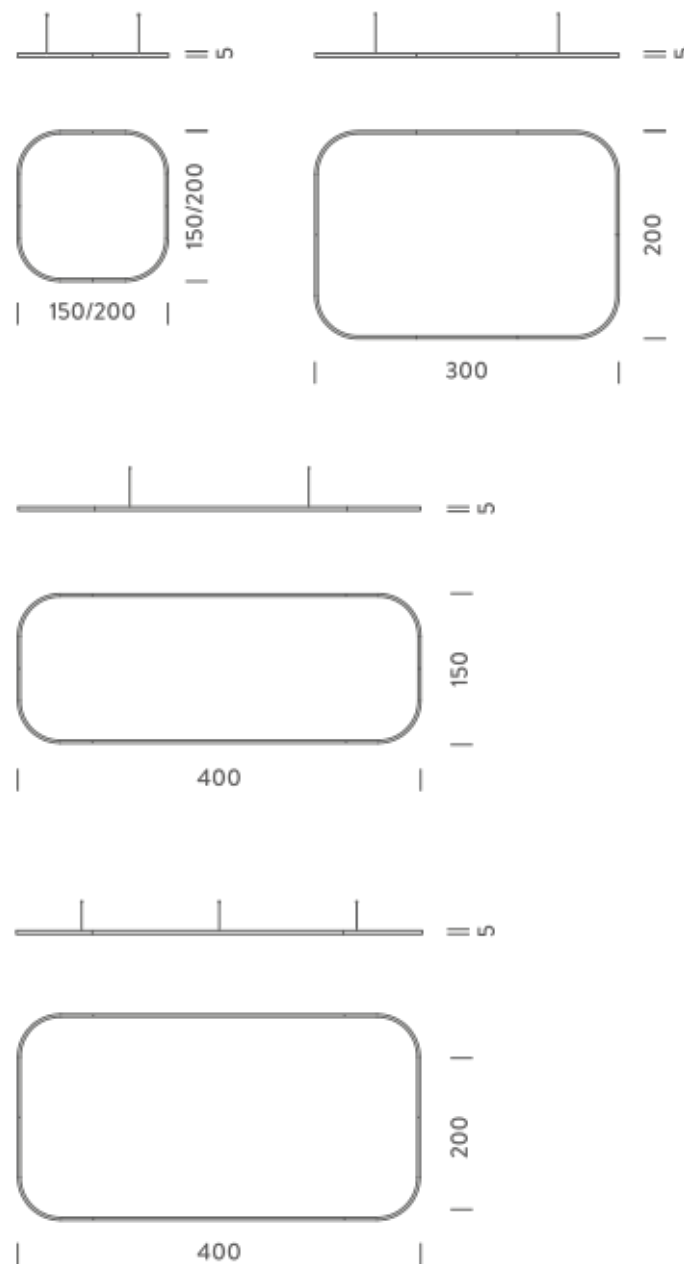

## 4X1,5M | DOWNLIGHT - 2700K

### LAMPING

Source	Linear LED
Total power	149W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	8597lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	400x150x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM150W24VIN, 1 dimmer interface WDIMDALIHP, 4 electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling
Net lamp weight	11,3 kg

### Codes

BZRQ1611G15DBO  
BZRQ1611G15DNE  
BZRQ1611G15DOR

### PACKAGE


Package 01

### Structure

white  
black  
gold

Dimension: 310x110x15 cm / Gross weight: 19,3 kg

### Certificazioni

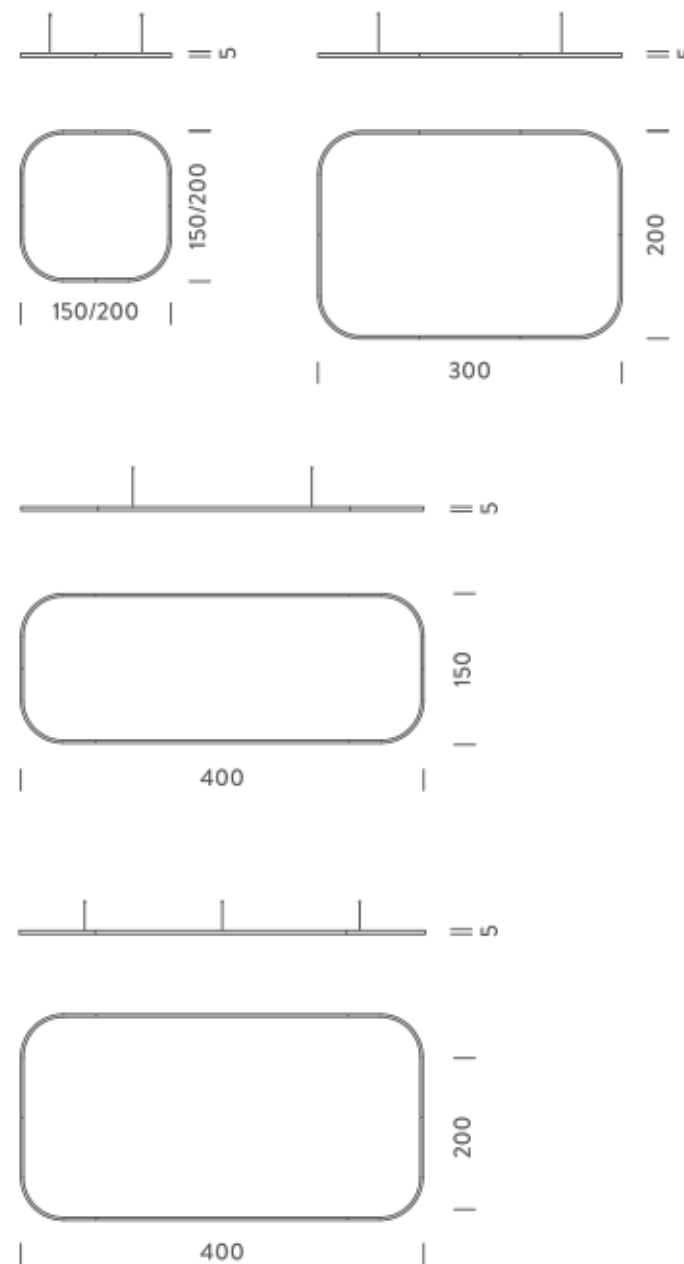

## 4X1,5M | UP - DOWNLIGHT - 2700K

### LAMPING

Source	Linear LED
Total power	297W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	17193lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	400x150x5cm
Materials	Aluminium
Notes	included: 2 drivers WALIM150W24VIN, 2x dimmer interface WDIMDALIHP, 4 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces

### Customization options

### Accessories

### Net lamp weight

### Codes

BZRQ1722G15DBO  
BZRQ1722G15DNE  
BZRQ1722G15DOR

### PACKAGE

Package 01

### Shapes, sizes


Canopy, for concrete ceiling | Canopy box, 1 driver, 2 electrical cables | Ceiling plate, for false ceiling

12,1 kg

### Structure

white  
black  
gold

Dimension: 310x110x15 cm / Gross weight: 20,1 kg

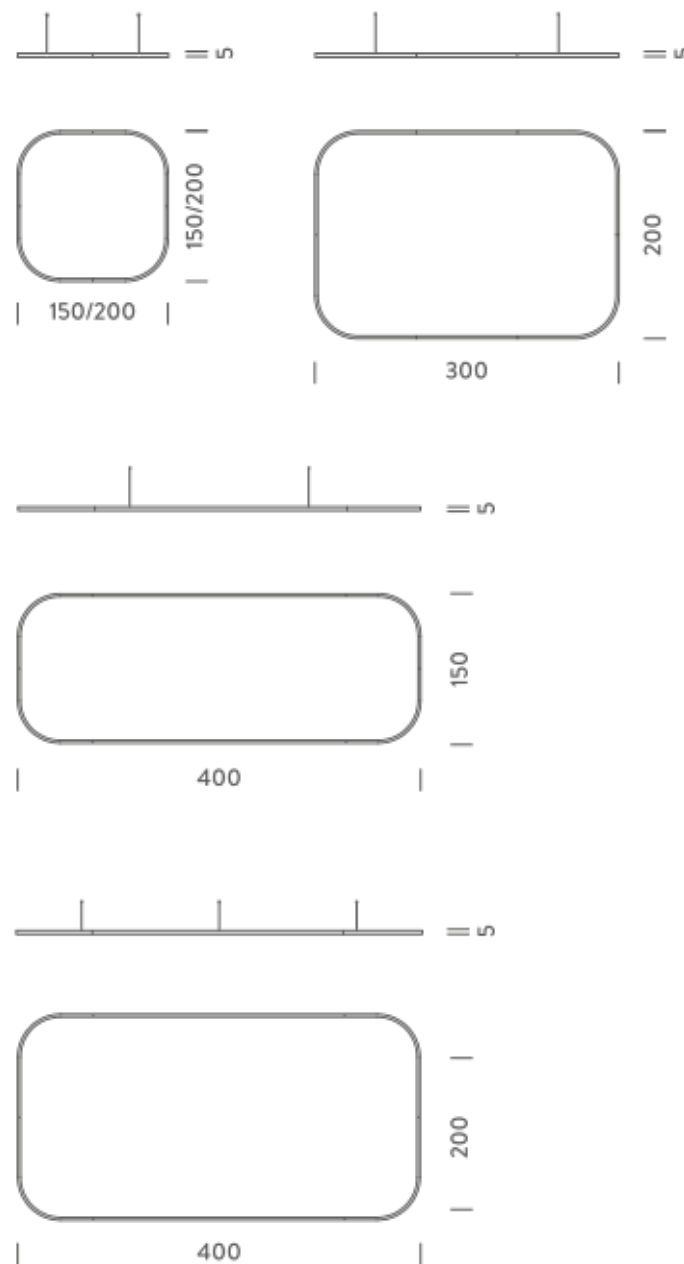

### Certificazioni



NEMO<sup>3.000</sup>

## 4X1,5M | DOWNLIGHT - 3000K

### LAMPING

Source	Linear LED
Total power	149W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	9102lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	400x150x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM150W24VIN, 1 dimmer interface WDIMDALIHP, 4 electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling
Net lamp weight	11,3 kg

### Codes

BZRQ1611G15WBO

BZRQ1611G15WNE

BZRQ1611G15WOR

### PACKAGE

Package 01

### Structure


white

black

gold

Dimension: 310x110x15 cm / Gross weight: 19,3 kg

### Certificazioni

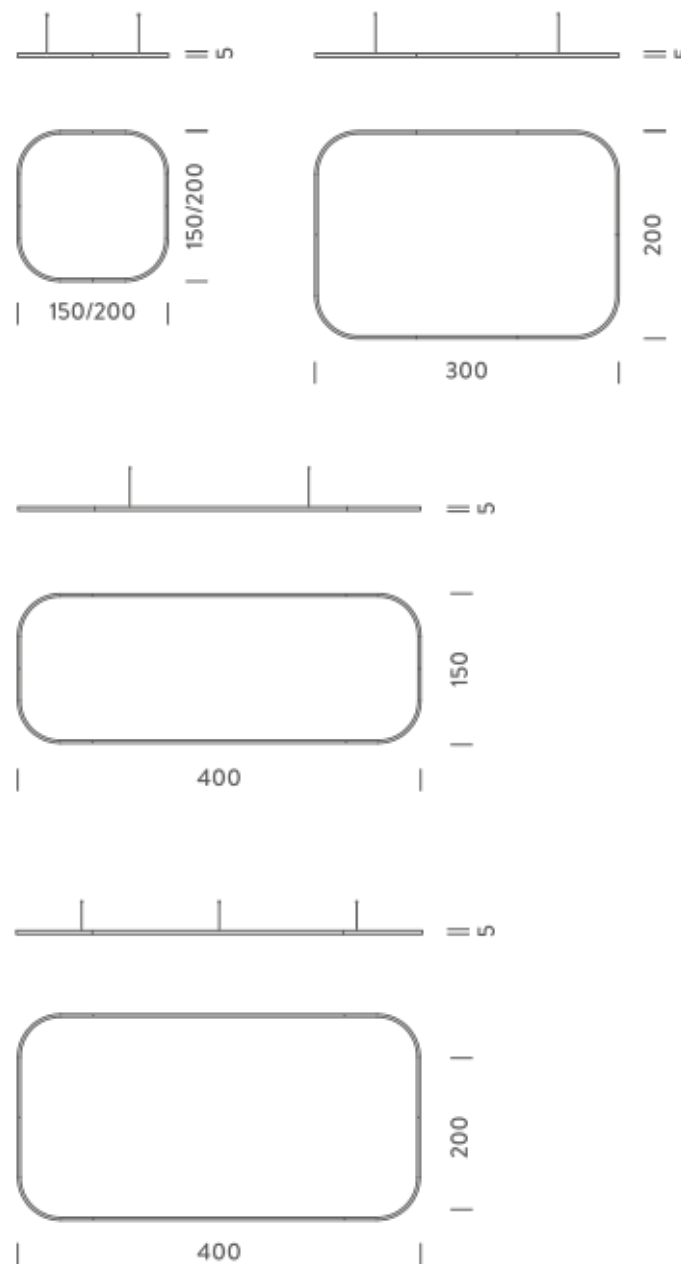

## 4X1,5M | UP - DOWNLIGHT - 3000K

### LAMPING

Source	Linear LED
Total power	297W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	18204lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	400x150x5cm
Materials	Aluminium
Notes	included: 2 drivers WALIM150W24VIN, 2x dimmer interface WDIMDALIHP, 4 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces

### Customization options

### Accessories

### Net lamp weight

### Codes

BZRQ1722G15WBO  
BZRQ1722G15WNE  
BZRQ1722G15WOR

### PACKAGE

Package 01

### Shapes, sizes


Canopy, for concrete ceiling | Canopy box, 1 driver, 2 electrical cables | Ceiling plate, for false ceiling

12,1 kg

### Structure

white  
black  
gold

Dimension: 310x110x15 cm / Gross weight: 20,1 kg

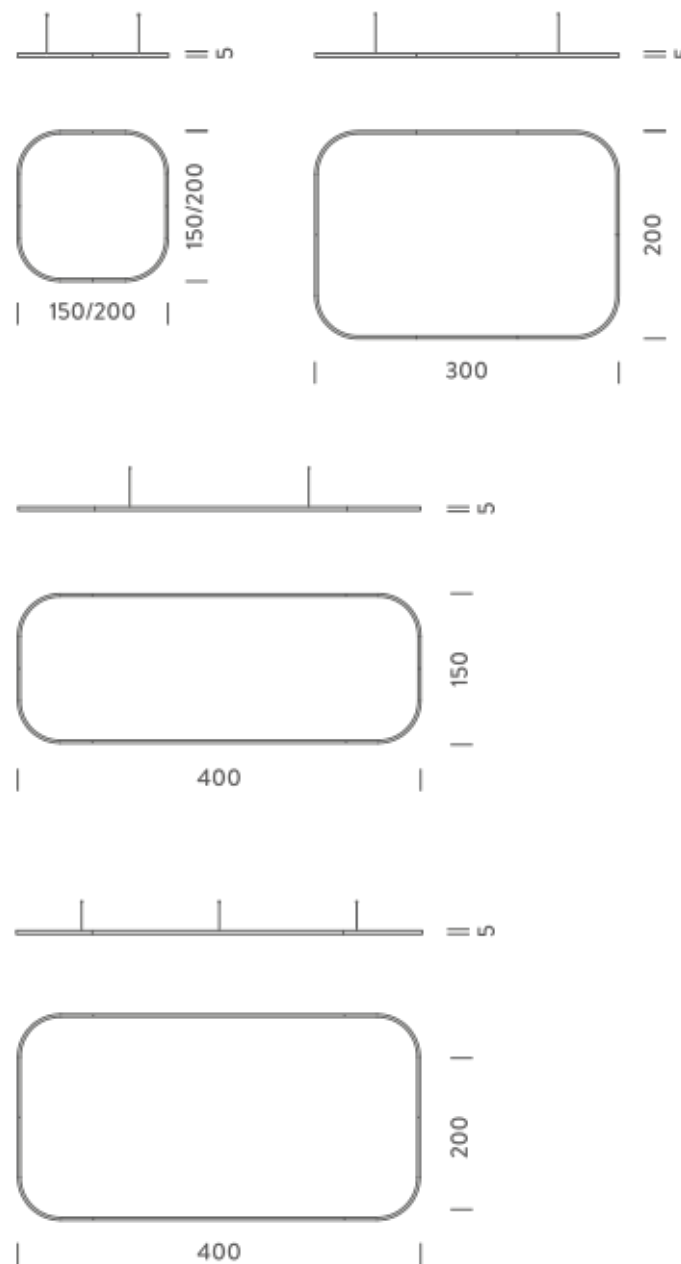

### Certificazioni



NEMO

## 4X1,5M | DOWNLIGHT - 4000K

### LAMPING

Source	Linear LED
Total power	149W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	10114lm
Typ CRI	90
Energy class	D
IP class	40
Dimensions	400x150x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM150W24VIN, 1 dimmer interface WDIMDALIHP, 4 electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling
Net lamp weight	11,3 kg

### Codes

BZRQ1611G15NBO  
BZRQ1611G15NNE  
BZRQ1611G15NOR

### PACKAGE


Package 01

### Structure

white  
black  
gold

Dimension: 310x110x15 cm / Gross weight: 19,3 kg

### Certificazioni

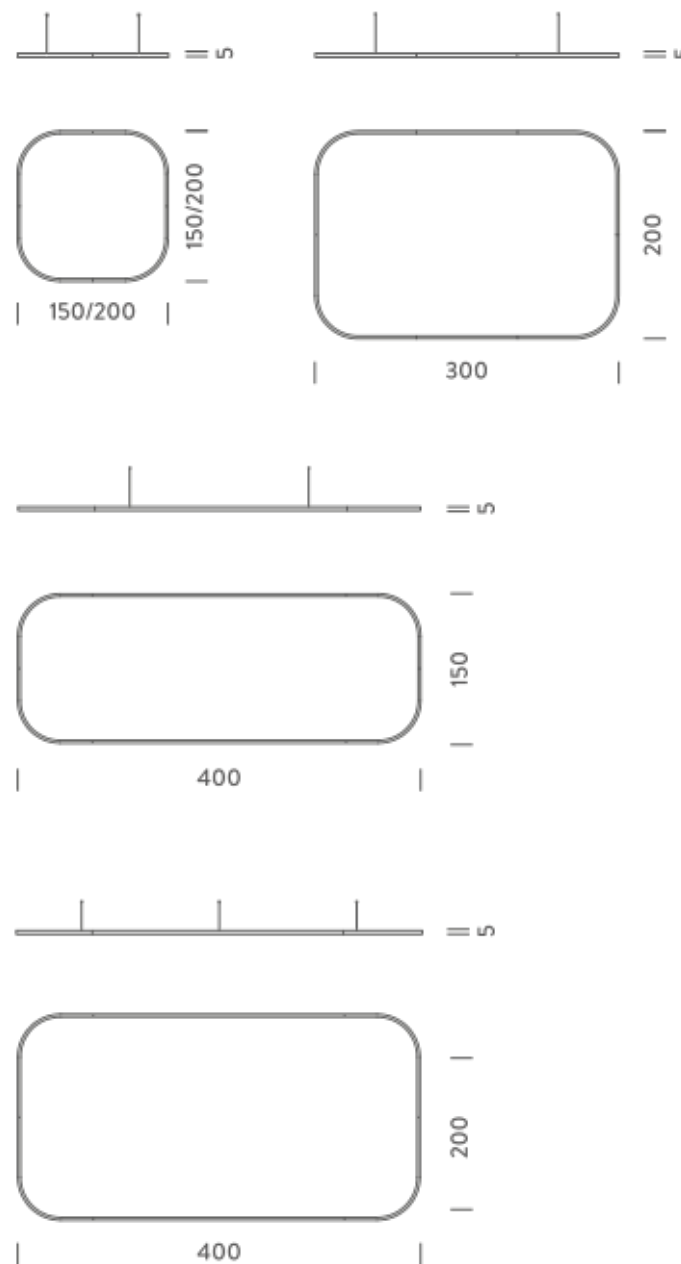



## 4X1,5M | UP - DOWNLIGHT - 4000K

### LAMPING

Source	Linear LED
Total power	297W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	20227lm
Typ CRI	90
Energy class	D
IP class	40
Dimensions	400x150x5cm
Materials	Aluminium
Notes	included: 2 drivers WALIM150W24VIN, 2x dimmer interface WDIMDALIHP, 4 electrical cables 5m, 4x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 2 electrical cables   Ceiling plate, for false ceiling
Net lamp weight	12,1 kg

### Codes

BZRQ1722G15NBO  
BZRQ1722G15NNE  
BZRQ1722G15NOR


### PACKAGE

Package 01 Dimension: 310x110x15 cm / Gross weight: 20,1 kg

### Certificazioni



NEMO<sup>3.000</sup>

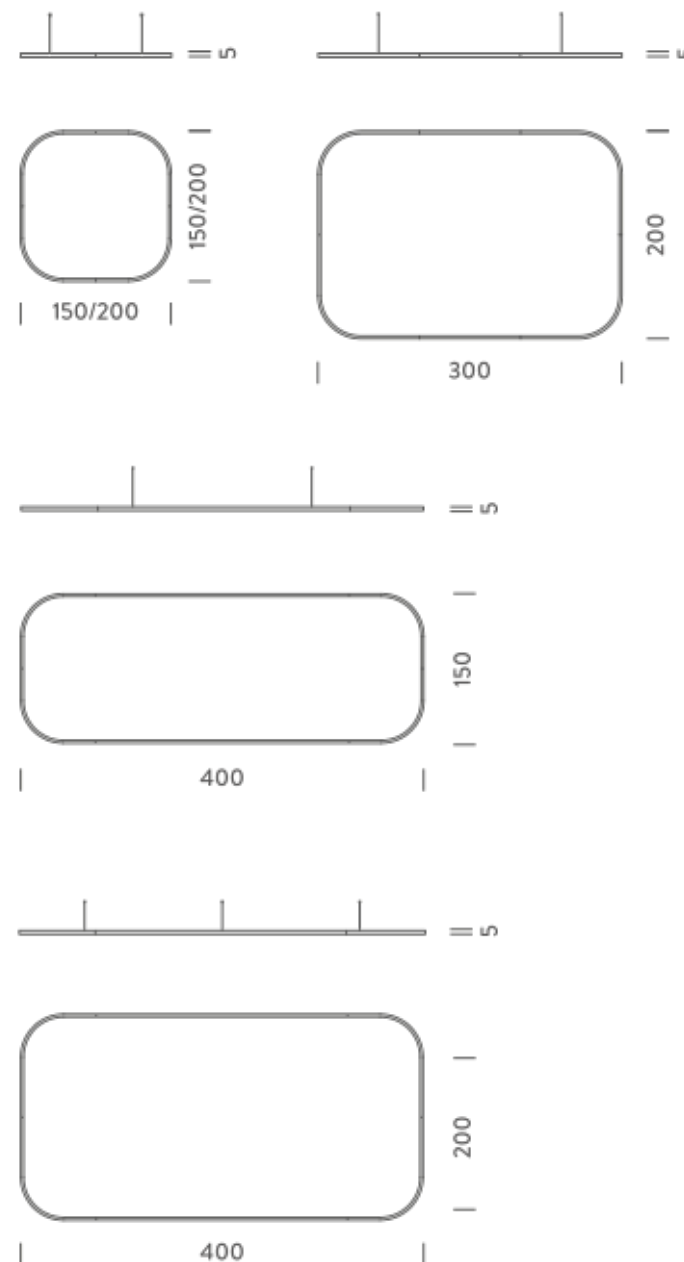

## 4X2M | DOWNLIGHT - 2700K

### LAMPING

Source	Linear LED
Total power	163W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	9430lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	400x200x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 4 electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling
Net lamp weight	12,3 kg

### Codes

BZRQ1612G15DBO  
BZRQ1612G15DNE  
BZRQ1612G15DOR


### PACKAGE

Package 01

### Structure

white  
black  
gold

Dimension: 310x110x15 cm / Gross weight: 20,3 kg

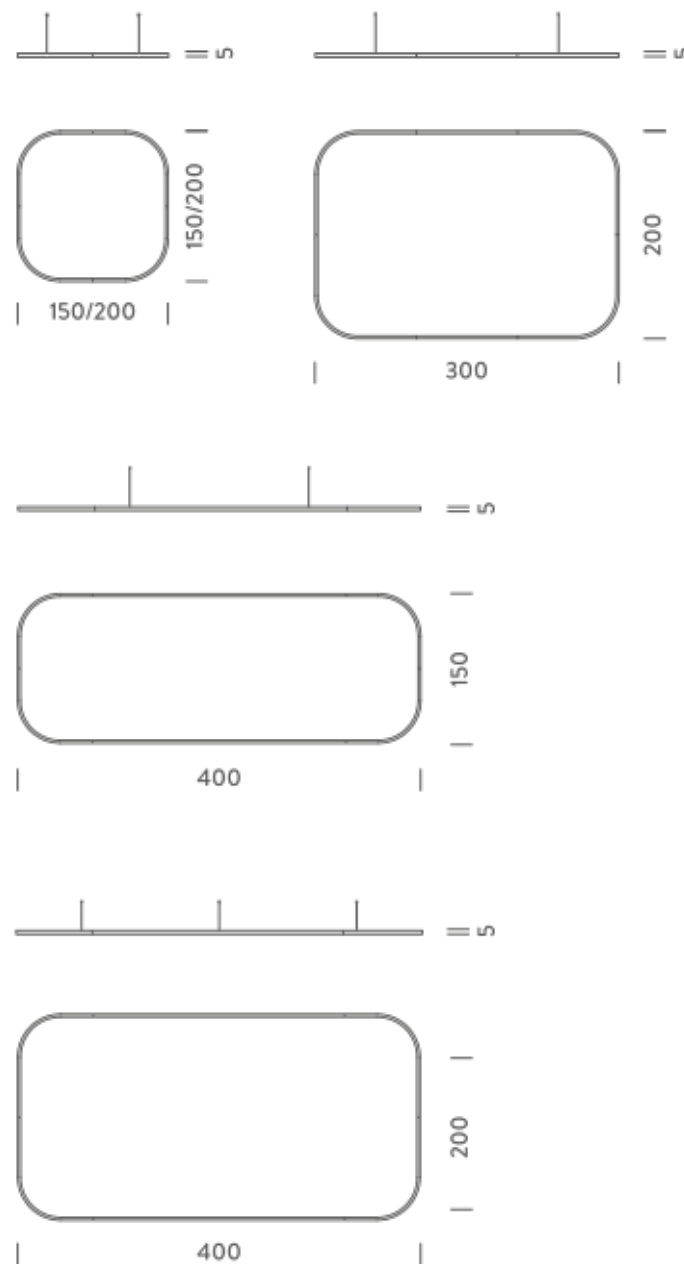

## 4X2M | UP - DOWNLIGHT - 2700K

### LAMPING

Source	Linear LED
Total power	326W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	18859lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	400x200x5cm
Materials	Aluminium
Notes	included: 2 drivers WALIM250W24VIN, 2x dimmer interface WDIMDALIHP, 4 electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling
Net lamp weight	13,2 kg

### Codes

BZRQ1724G15DBO

BZRQ1724G15DNE

BZRQ1724G15DOR

### PACKAGE

Package 01

### Structure

white

black


gold

Dimension: 310x110x15 cm / Gross weight: 21,2 kg

### Certificazioni



NEMO<sup>3,000</sup>

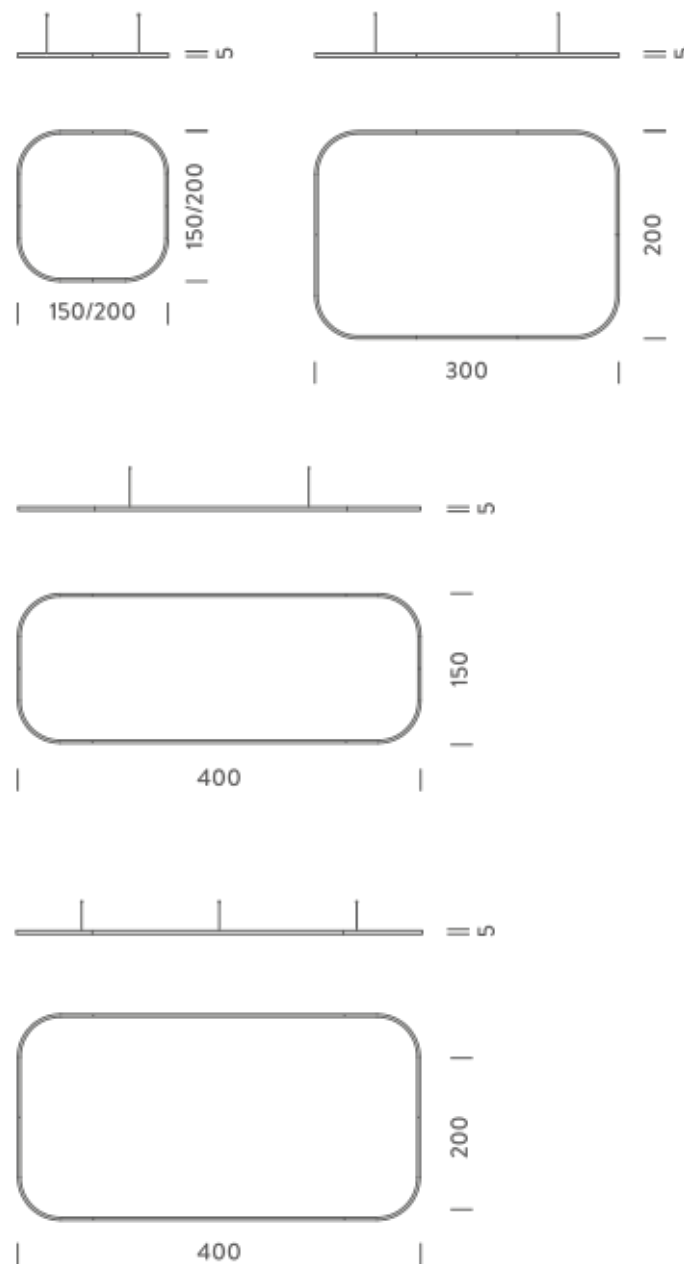

## 4X2M | DOWNLIGHT - 3000K

### LAMPING

Source	Linear LED
Total power	163W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	9984lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	400x200x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 4 electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling
Net lamp weight	12,3 kg

### Codes

BZRQ1612G15WBO  
BZRQ1612G15WNE  
BZRQ1612G15WOR


### PACKAGE

Package 01

### Structure

white  
black  
gold

Dimension: 310x110x15 cm / Gross weight: 20,3 kg

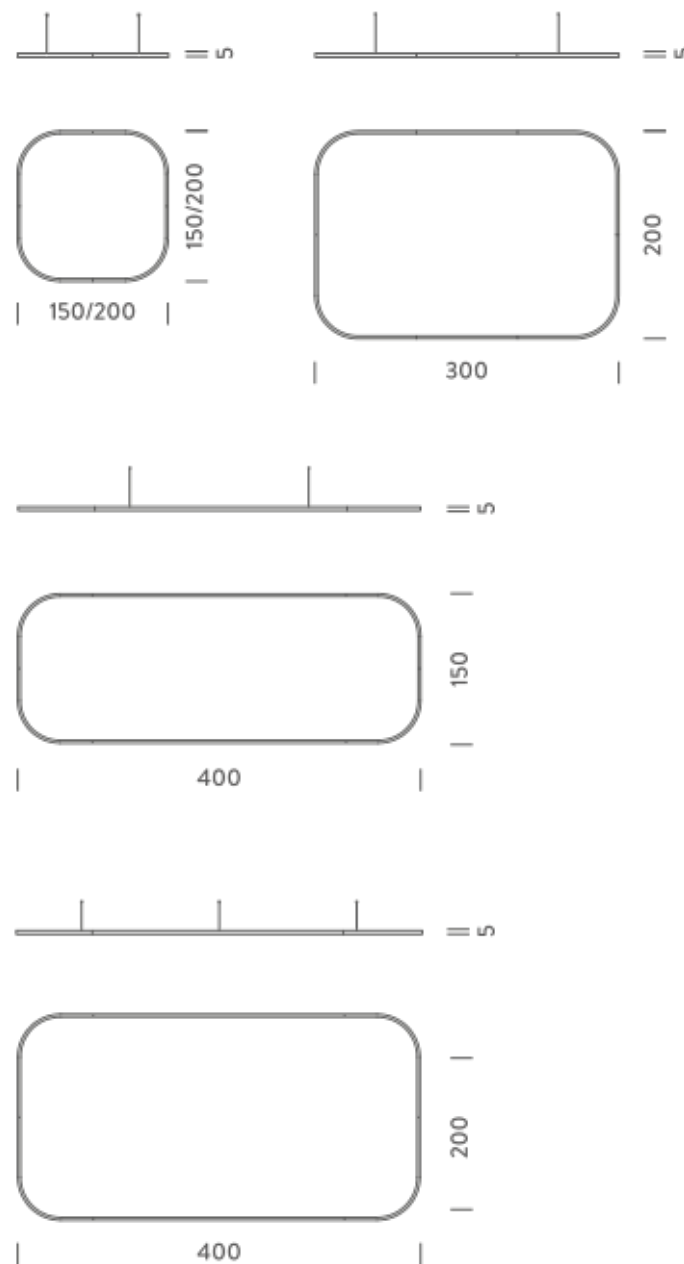

## 4X2M | UP - DOWNLIGHT - 3000K

### LAMPING

Source	Linear LED
Total power	326W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	19968lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	400x200x5cm
Materials	Aluminium
Notes	included: 2 drivers WALIM250W24VIN, 2x dimmer interface WDIMDALIHP, 4 electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling
Net lamp weight	13,2 kg

### Codes

BZRQ1724G15WBO  
BZRQ1724G15WNE  
BZRQ1724G15WOR

### PACKAGE


Package 01

### Structure

white  
black  
gold

Dimension: 310x110x15 cm / Gross weight: 21,2 kg

### Certificazioni

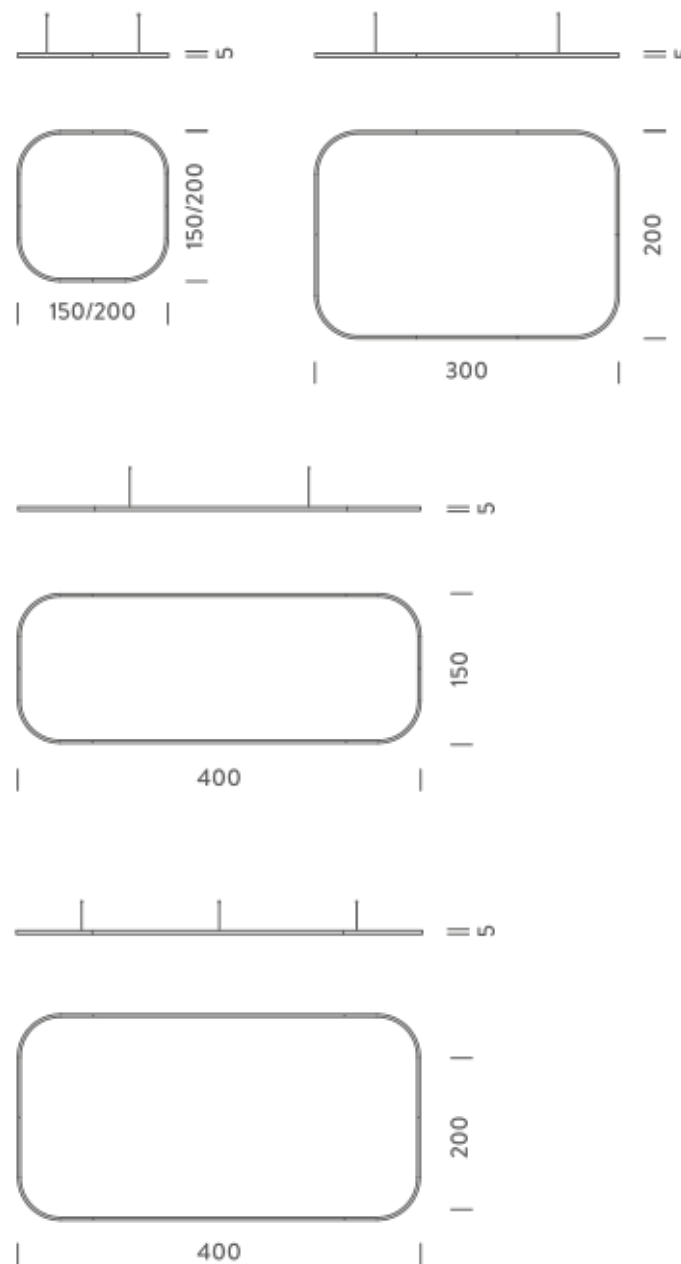

## 4X2M | DOWNLIGHT - 4000K

### LAMPING

Source	Linear LED
Total power	163W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	11094lm
Typ CRI	90
Energy class	D
IP class	40
Dimensions	400x200x5cm
Materials	Aluminium
Ambient temperature range	0°C / 35°
Performance ambient temperature	25°

Notes  
included: 1 driver WALIM250W24VIN, 1 dimmer interface WDIMDALIHP, 4 electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces

Customization options

Shapes, sizes

Accessories

Canopy, for concrete ceiling | Ceiling plate, for false ceiling

Net lamp weight

12,3 kg

### Codes

BZRQ1612G15NBO  
BZRQ1612G15NNE  
BZRQ1612G15NOR

### Structure


white  
black  
gold

### PACKAGE

Package 01

Dimension: 310x110x15 cm / Gross weight: 20,3 kg

### Certificazioni

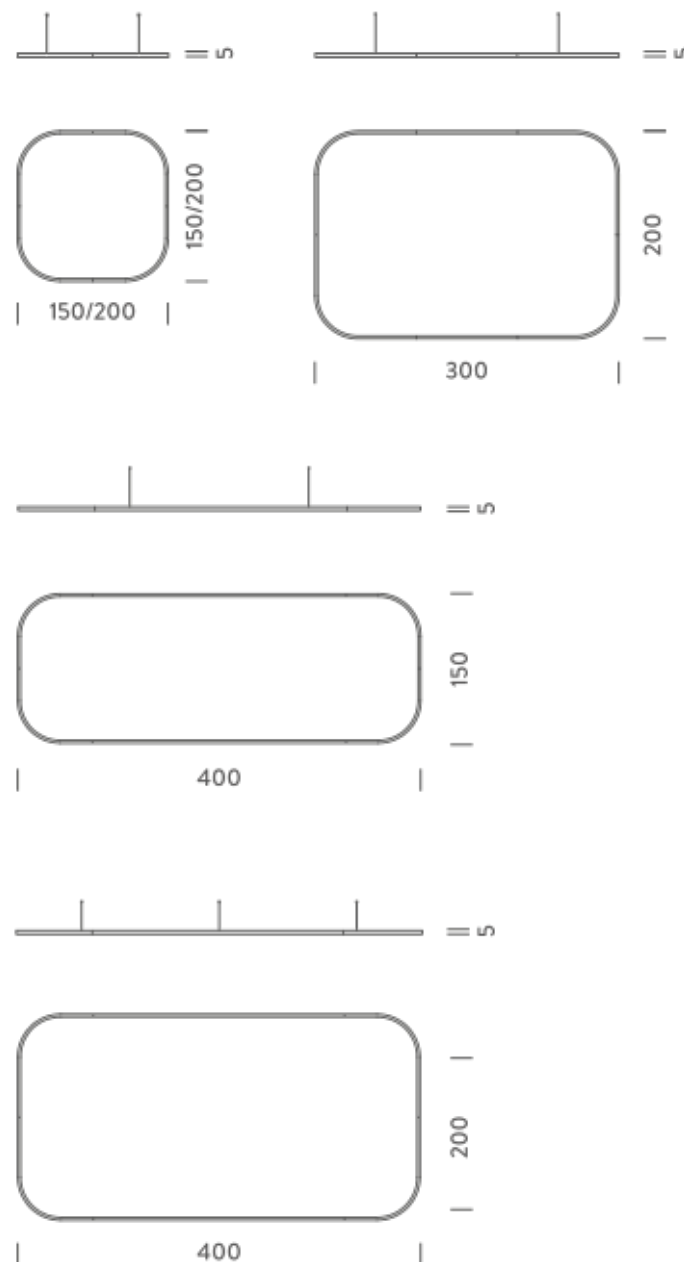

## 4X2M | UP - DOWNLIGHT - 4000K

### LAMPING

Source	Linear LED
Total power	326W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	22187lm
Initial luminaire efficacy	35lm/W
Typ CRI	90
Energy class	D
IP class	40
Dimensions	400x200x5cm
Materials	Aluminium
Ambient temperature range	0°C / 35°
Performance ambient temperature	25°
Notes	included: 2 drivers WALIM250W24VIN, 2x dimmer interface WDIMDALIHP, 4 electrical cables 5m, 6x adjustable metal cables length 3m (including ceiling attachment). Shipped in 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling
Net lamp weight	13,2 kg

### Codes

BZRQ1724G15NBO

BZRQ1724G15NNE

BZRQ1724G15NOR

### PACKAGE

Package 01


Dimension: 310x110x15 cm / Gross weight: 21,2 kg

### Structure

white

black

gold

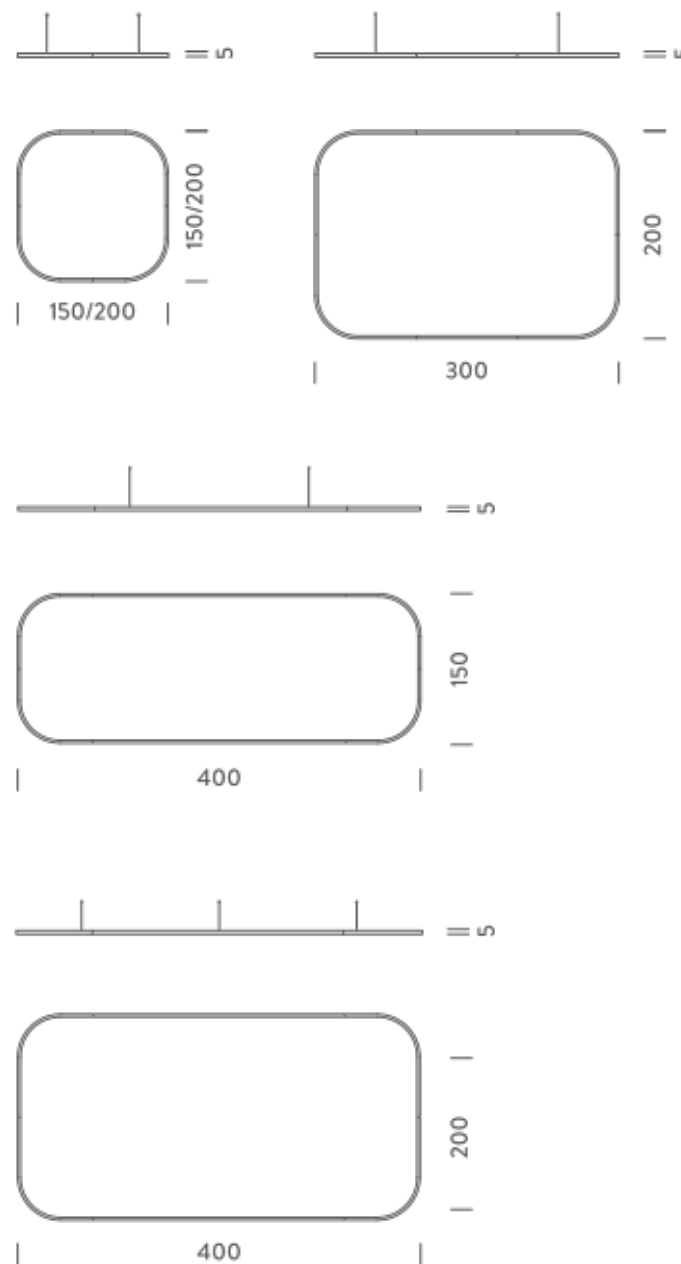

### Certificazioni

