

LUX INDOOR

Mikroeinbau-LED-Spot für den Innenbereich, geeignet für dekorative Beleuchtung. Gehäuse aus eloxiertem Aluminium. 100 ° Abstrahlwinkel oder Opaloptik. Fixierung durch einer Mutter, zwei Gummi-O-Ringen oder einer Feder.



3000K | 100°

LAMPING

| | |
|---------------------------------|-----------------------------------|
| Source | LED spot |
| Total power | 1,2W |
| Emission | Direct 100° |
| Switching | according to driver |
| Tension | 350mA |
| Color temperature | 3000K |
| Luminous flux | 53lm |
| Initial luminaire efficacy | 44lm/W |
| Initial chromaticity | SDCM < 3 |
| Typ CRI | 90 |
| IP class | 40 |
| Dimensions | Ø1,9x2,8cm |
| Materials | Anodized aluminum |
| Ambient temperature range | - 20°C / 35° |
| Performance ambient temperature | 25° |
| Notes | cabale 0,25m; driver not included |
| Customization options | DALI, DMX, Casambi |
| Accessories | Drivers 350mA, |
| Net lamp weight | 0,45 kg |

Codes

BLUX0101717WAA


Structure

grey

PACKAGE

Package 01 Dimension: 15x2,5x11 cm / Gross weight: 0,05 kg

Certificazioni

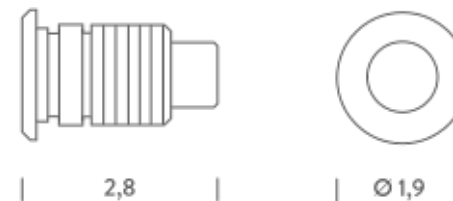

3000K | OPAL

LAMPING

| | |
|---------------------------------|----------------------------------|
| Source | LED spot |
| Total power | 1,2W |
| Emission | Diffused |
| Switching | according to driver |
| Tension | 350mA |
| Color temperature | 3000K |
| Luminous flux | 53lm |
| Initial luminaire efficacy | 44lm/W |
| Initial chromaticity | SDCM < 3 |
| Typ CRI | 90 |
| IP class | 40 |
| Dimensions | Ø1,9x2,8cm |
| Materials | Anodized aluminum |
| Ambient temperature range | - 20°C / 35° |
| Performance ambient temperature | 25° |
| Notes | cable 0,25m; driver not included |
| Customization options | DALI, DMX, Casambi |
| Accessories | Drivers 350mA, |
| Net lamp weight | 0,45 kg |

Codes

BLUX0101G17WAA

Structure


grey

PACKAGE

Package 01

Dimension: 15x2,5x11 cm / Gross weight: 0,05 kg

Certificazioni

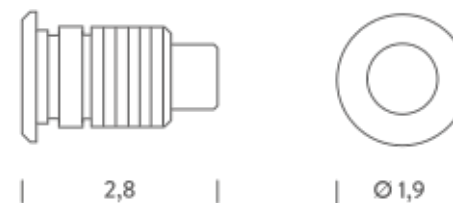

4000K | 100°

LAMPING

| | |
|---------------------------------|--|
| Source | LED spot |
| Total power | 1,2W |
| Emission | Direct 100° |
| Switching | according to driver |
| Tension | 350mA |
| Color temperature | 4000K |
| Luminous flux | 84lm |
| Initial luminaire efficacy | 70lm/W |
| Initial chromaticity | SDCM < 3 |
| Typ CRI | 80 |
| IP class | 40 |
| Dimensions | Ø1,9x2,8cm |
| Materials | Anodized aluminum |
| Ambient temperature range | - 20°C / 35° |
| Performance ambient temperature | 25° |
| Notes | compatible controls: 1-10V, DALI, DMX, Casambi; cable 0,25m; driver not included |
| Customization options | DALI, DMX, Casambi |
| Accessories | Drivers 350mA, |
| Net lamp weight | 0,45 kg |

Codes

BLUX0101717NAA


Structure

grey

PACKAGE

Package 01 Dimension: 15x2,5x11 cm / Gross weight: 0,05 kg

Certificazioni

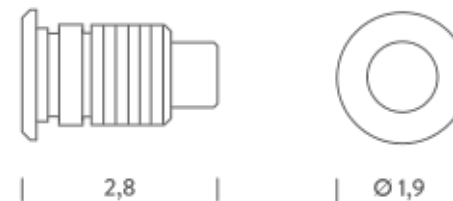

4000K | OPAL

LAMPING

| | |
|---------------------------------|----------------------------------|
| Source | LED spot |
| Total power | 1,2W |
| Emission | Diffused |
| Switching | according to driver |
| Tension | 350mA |
| Color temperature | 4000K |
| Luminous flux | 84lm |
| Initial luminaire efficacy | 70lm/W |
| Initial chromaticity | SDCM < 3 |
| Typ CRI | 80 |
| IP class | 40 |
| Dimensions | Ø1,9x2,8cm |
| Materials | Anodized aluminum |
| Ambient temperature range | - 20°C / 35° |
| Performance ambient temperature | 25° |
| Notes | cable 0,25m; driver not included |
| Customization options | DALI, DMX, Casambi |
| Accessories | Drivers 350mA, |
| Net lamp weight | 0,45 kg |

Codes

BLUX0101G17NAA

Structure

grey

PACKAGE

Package 01 Dimension: 15x2,5x11 cm / Gross weight: 0,25 kg

Certificazioni

