

SLACKLINE TRIM

Die SLACKLINE-Familie besteht aus einer großen Auswahl an Aluminiumprofilen mit unterschiedlichen Befestigungen mit derselben LED-LEuchtmittel, die die Slackline-Installation in jedem Ambiente sehr flexibel macht: Slackline Trim, Slackline Regular und Slackline Micro.

Minimales Design mit hoher Lichtqualität.

Slackline eignet sich für lineare Verbindungslösungen (auf Anfrage).

Je nach Befestigung wird es in unterschiedlichen Standardlängen mit CRI > 94 angeboten.



1M | 3000K

LAMPING

Source	Linear LED
Total power	15W
Emission	Diffused
Tension	24VDC
Color temperature	3000K
Luminous flux	560lm
Initial luminaire efficacy	> 37lm/W
Initial chromaticity	SDCM < 3
Typ CRI	97
Energy class	F
IP class	40
Dimensions	3,25x2x100,5cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 1m; driver not included
Customization options	Colour temperatures, lengths
Accessories	Drivers 24VDC + DALI interface, Recessed fix kit for plasterboard,
Net lamp weight	0,45 kg

Codes

BSLA0110G26WAA

Structure


grey

PACKAGE

Package 01

Dimension: 105x11x2,5 cm / Gross weight: 0,87 kg

Certificazioni

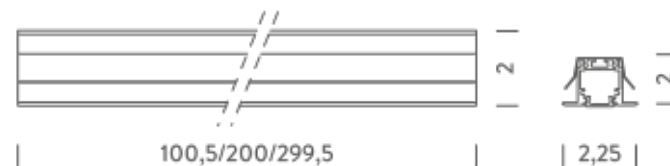

1M | 4000K

LAMPING

Source	Linear LED
Total power	15W
Emission	Diffused
Tension	24VDC
Color temperature	4000K
Luminous flux	660lm
Initial luminaire efficacy	> 37lm/W
Initial chromaticity	SDCM < 3
Typ CRI	94
Energy class	E
IP class	40
Dimensions	3,25x2x100,5cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 1m; driver not included
Customization options	Colour temperatures, lengths
Accessories	Drivers 24VDC + DALI interface, Recessed fix kit for plasterboard,
Net lamp weight	0,45 kg

Codes

BSLA0110G26NAA

Structure


grey

PACKAGE

Package 01

Dimension: 105x11x2,5 cm / Gross weight: 0,87 kg

Certificazioni

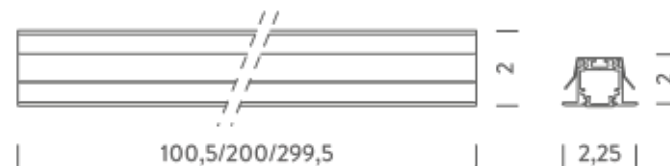

2M | 3000K

LAMPING

Source	Linear LED
Total power	30W
Emission	Diffused
Tension	24VDC
Color temperature	3000K
Luminous flux	1120lm
Initial luminaire efficacy	> 37lm/W
Initial chromaticity	SDCM < 3
Typ CRI	97
Energy class	F
IP class	40
Dimensions	3,25x2x200cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 1m; driver not included
Customization options	Colour temperatures, lengths
Accessories	Drivers 24VDC + DALI interface, Recessed fix kit for plasterboard,
Net lamp weight	0,87 kg

Codes

BSLA0120G26WAA

Structure


grey

PACKAGE

Package 01

Dimension: 205x11x2,5 cm / Gross weight: 1,32 kg

Certificazioni

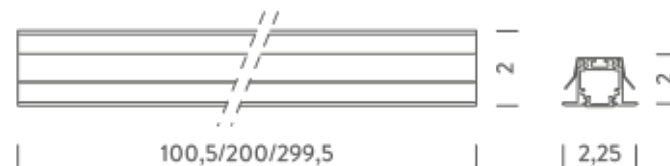

2M | 4000K

LAMPING

Source	Linear LED
Total power	30W
Emission	Diffused
Tension	24VDC
Color temperature	4000K
Luminous flux	1320lm
Initial luminaire efficacy	> 37lm/W
Initial chromaticity	SDCM < 3
Typ CRI	94
Energy class	E
IP class	40
Dimensions	3,25x2x200cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 1m; driver not included
Customization options	Colour temperatures, lengths
Accessories	Drivers 24VDC + DALI interface, Recessed fix kit for plasterboard,
Net lamp weight	0,87 kg

Codes

BSLA0120G26NAA

Structure


grey

PACKAGE

Package 01

Dimension: 205x11x2,5 cm / Gross weight: 1,32 kg

Certificazioni

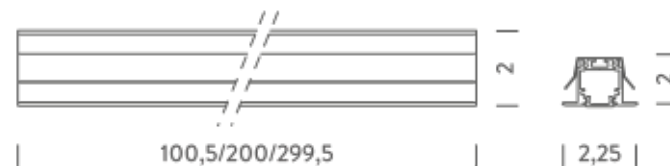

3M | 3000K

LAMPING

Source	Linear LED
Total power	45W
Emission	Diffused
Tension	24VDC
Color temperature	3000K
Luminous flux	1980lm
Initial luminaire efficacy	> 37lm/W
Initial chromaticity	SDCM < 3
Typ CRI	97
Energy class	F
IP class	40
Dimensions	3,25x2x299,5cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 1m; driver not included
Customization options	Colour temperatures, lengths
Accessories	Drivers 24VDC + DALI interface, Recessed fix kit for plasterboard,
Net lamp weight	1,32 kg


Codes
BSLA0130G26WAA

Structure
grey

PACKAGE

Package 01 Dimension: 305x11x2,5 cm / Gross weight: 1,74 kg

Certificazioni

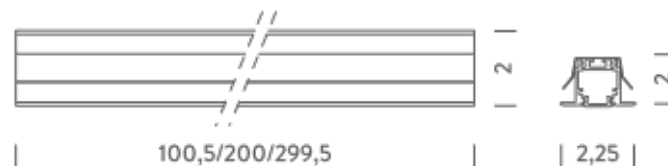

3M | 4000K

LAMPING

Source	Linear LED
Total power	45W
Emission	Diffused
Tension	24VDC
Color temperature	4000K
Luminous flux	1680lm
Initial luminaire efficacy	> 37lm/W
Initial chromaticity	SDCM < 3
Typ CRI	94
Energy class	E
IP class	40
Dimensions	3,25x2x299,5cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 1m; driver not included
Customization options	Colour temperatures, lengths
Accessories	Drivers 24VDC + DALI interface, Recessed fix kit for plasterboard,
Net lamp weight	1,32 kg

Codes
BSLA0130G26NAA

Structure
grey

PACKAGE

Package 01 Dimension: 305x11x2,5 cm / Gross weight: 1,74 kg

Certificazioni

