

SLACKLINE REGULAR

Die SLACKLINE-Familie besteht aus einer großen Auswahl an Aluminiumprofilen mit unterschiedlichen Befestigungen mit derselben LED-LEuchtmittel, die die Slackline-Installation in jedem Ambiente sehr flexibel macht: Slackline Trim, Slackline Regular und Slackline Micro.

Minimales Design mit hoher Lichtqualität.

Slackline eignet sich für lineare Verbindungslösungen (auf Anfrage).

Je nach Befestigung wird es in unterschiedlichen Standardlängen mit CRI > 94 angeboten.



RECESSED | 1M - 3000K

LAMPING

Source	Linear LED
Total power	15W
Emission	Diffused
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	860lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM < 3
Typ CRI	97
Energy class	F
IP class	40
Dimensions	5,14x1,35x100,5cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	cable 0,5m; driver not included
Customization options	1-10V, DALI, DMX, Casambi, LED colour temperatures, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,45 kg

Codes

BSLA2110G26WAA

Structure

grey

PACKAGE


Package 01

Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg

Certificazioni




SUSPENDED

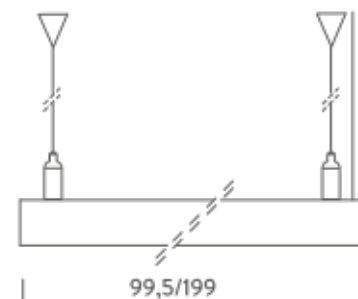





CEILING



RECESSED

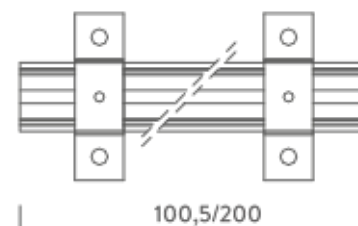

WALL MOUNTED

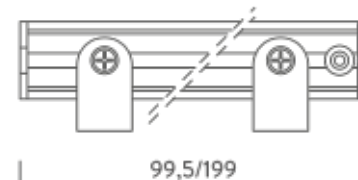

RECESSED | 1M - 4000K

LAMPING

Source	Linear LED
Total power	15W
Emission	Diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	890lm
Initial luminaire efficacy	59lm/W
Initial chromaticity	SDCM < 3
Typ CRI	94
Energy class	E
IP class	40
Dimensions	5,14x1,35x100,5cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	cable 0,5m; driver not included
Customization options	1-10V, DALI, DMX, Casambi, LED colour temperatures, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,45 kg

Codes

BSLA2110G26NAA

Structure

grey

PACKAGE


Package 01

Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg

Certificazioni




SUSPENDED

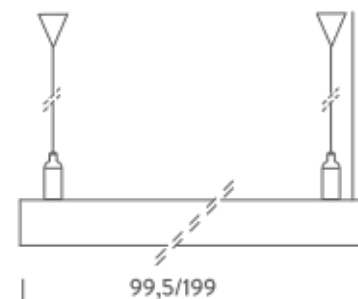





CEILING



RECESSED

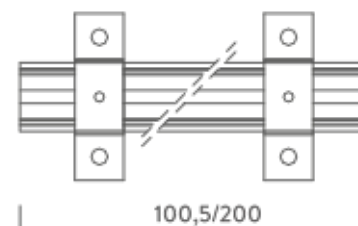

WALL MOUNTED

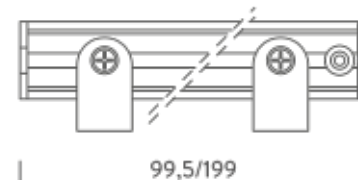

RECESSED | 2M - 3000K

LAMPING

Source	Linear LED
Total power	30W
Emission	Diffused
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1720lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM < 3
Typ CRI	97
Energy class	F
IP class	40
Dimensions	5,14x1,35x200cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	cable 0,5m; driver not included
Customization options	1-10V, DALI, DMX, Casambi, LED colour temperatures, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,90 kg

Codes

BSLA2120G26WAA

Structure

grey

PACKAGE


Package 01

Dimension: 205x11x2,5 cm / Gross weight: 0,90 kg

Certificazioni




SUSPENDED

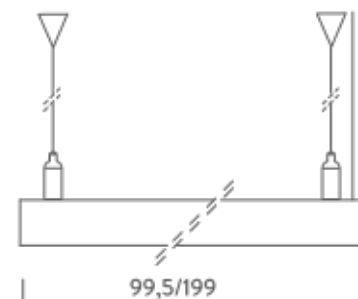





CEILING



RECESSED

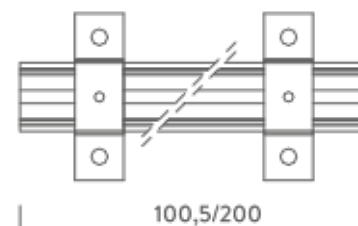

WALL MOUNTED

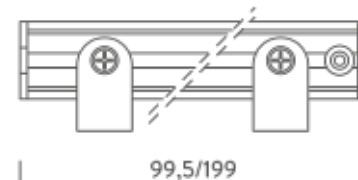

RECESSED | 2M - 4000K

LAMPING

Source	Linear LED
Total power	30W
Emission	Diffused
Switching	according driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1780lm
Initial luminaire efficacy	59lm/W
Initial chromaticity	SDCM < 3
Typ CRI	94
Energy class	E
IP class	40
Dimensions	5,14x1,35x200cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 0,5m; driver not included
Customization options	1-10V, DALI, DMX, Casambi, LED colour temperatures, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,90 kg

Codes

BSLA2120G26NAA

Structure

grey

PACKAGE

Package 01


Dimension: 205x11x2,5 cm / Gross weight: 0,90 kg

Certificazioni



NEMO


SUSPENDED

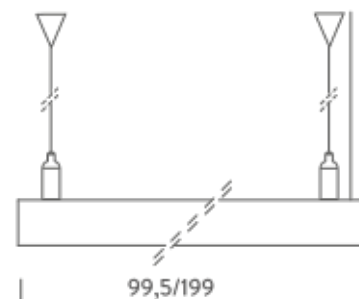





CEILING



RECESSED

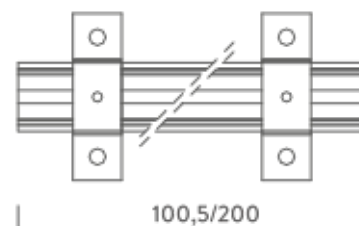

WALL MOUNTED

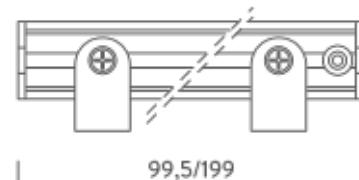

PENDANT | 1M - 3000K

LAMPING

Source	Linear LED
Total power	15W
Emission	Diffused
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	860lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM < 3
Typ CRI	97
Energy class	F
IP class	40
Dimensions	2,25x1,35x99,5cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	cable 2m; driver not included
Customization options	1-10V, DALI, DMX, Casambi, LED colour temperatures, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,45 kg

Codes

BSLA0310G26WAA

Structure

grey

PACKAGE



Package 01

Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg

Certificazioni




SUSPENDED

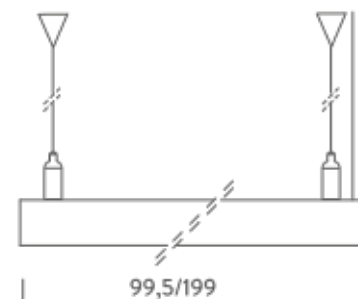



CEILING



RECESSED

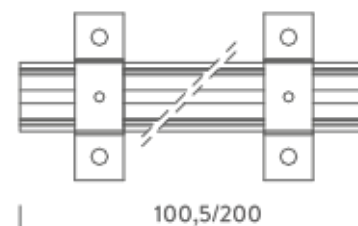

WALL MOUNTED

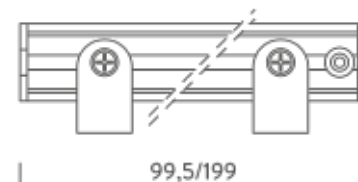

PENDANT | 1M - 4000K

LAMPING

Source	Linear LED
Total power	15W
Emission	Diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	890lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM < 3
Typ CRI	94
Energy class	E
IP class	40
Dimensions	2,25x1,35x99,5cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	cable 2m; driver not included
Customization options	1-10V, DALI, DMX, Casambi, LED colour temperatures, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,45 kg

Codes

BSLA0310G26NAA

Structure

grey

PACKAGE



Package 01

Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg

Certificazioni




SUSPENDED

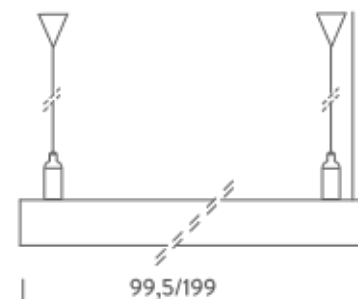



CEILING



RECESSED

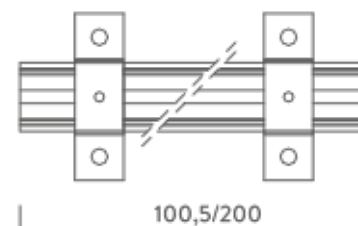

WALL MOUNTED

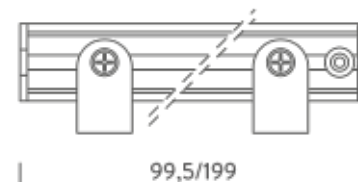

PENDANT | 2M - 3000K

LAMPING

Source	Linear LED
Total power	30W
Emission	Diffused
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1720lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM < 3
Typ CRI	97
Energy class	F
IP class	40
Dimensions	2,25x1,35x199,5cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	cable 2m; driver not included
Customization options	1-10V, DALI, DMX, Casambi, LED colour temperatures, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,90 kg

Codes

BSLA0320G26WAA

Structure

grey

PACKAGE



Package 01

Dimension: 205x11x2,5 cm / Gross weight: 0,90 kg

Certificazioni




SUSPENDED

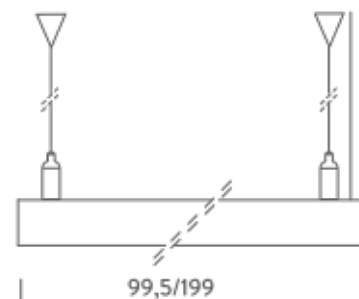



CEILING



RECESSED

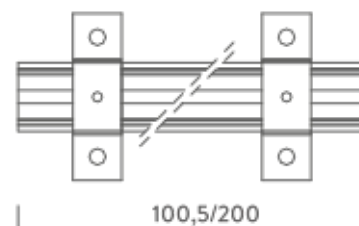

WALL MOUNTED

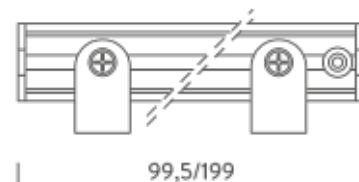

PENDANT | 2M - 4000K

LAMPING

Source	Linear LED
Total power	30W
Emission	Diffused
Switching	according do driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1780lm
Initial luminaire efficacy	59lm/W
Initial chromaticity	SDCM < 3
Typ CRI	94
Energy class	E
IP class	40
Dimensions	2,25x1,35x199,5cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	cable 2m; driver not included
Customization options	1-10V, DALI, DMX, Casambi, LED colour temperatures, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,90 kg

Codes

BSLA0320G26NAA

Structure

grey

PACKAGE



Package 01

Dimension: 205x11x2,5 cm / Gross weight: 0,90 kg

Certificazioni





SUSPENDED

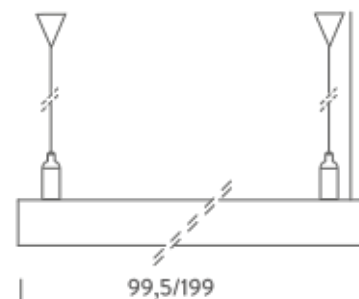



CEILING



RECESSED

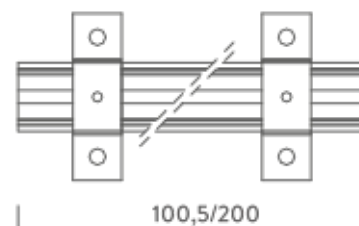

WALL MOUNTED

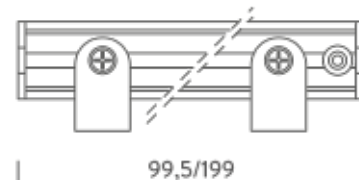

CEILING | 1M - 3000K

LAMPING

Source	Linear LED
Total power	15W
Emission	Diffused
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	860lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM < 3
Typ CRI	97
Energy class	F
IP class	40
Dimensions	2,25x1,35x101cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	cable 0,5m; driver not included
Customization options	1-10V, DALI, DMX, Casambi, LED colour temperatures, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,45 kg

Codes

BSLA0410G26WAA

Structure

grey

PACKAGE



Package 01

Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg


Certificazioni




SUSPENDED

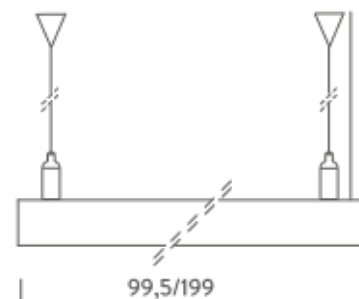



CEILING

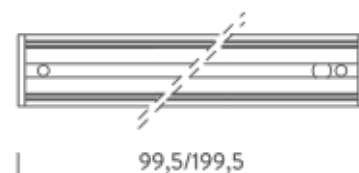

RECESSED

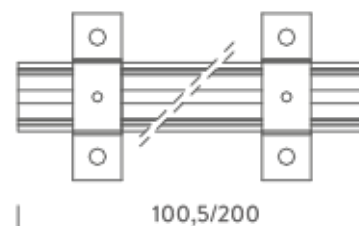

WALL MOUNTED

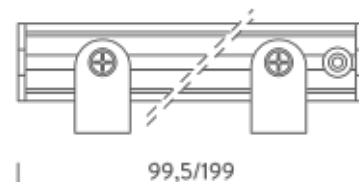

CEILING | 1M - 4000K

LAMPING

Source	Linear LED
Total power	15W
Emission	Diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	890lm
Initial luminaire efficacy	> 59lm/W
Initial chromaticity	SDCM < 3
Typ CRI	94
Energy class	E
IP class	40
Dimensions	2,25x1,35x101cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	cable 0,5m; driver not included
Customization options	1-10V, DALI, DMX, Casambi, LED colour temperatures, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,45 kg

Codes

BSLA0410G26NAA

Structure

grey

PACKAGE



Package 01

Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg

Certificazioni




SUSPENDED

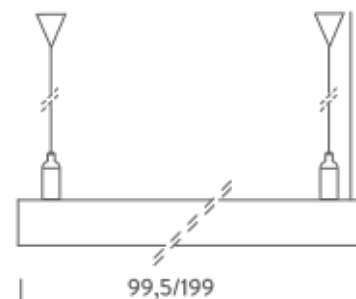



CEILING



RECESSED

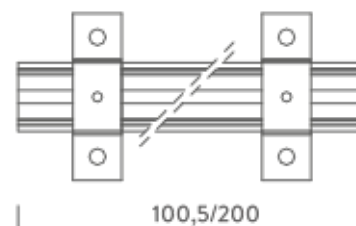

WALL MOUNTED

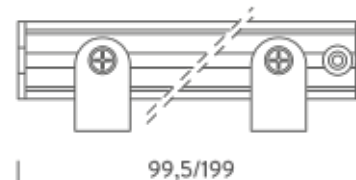

CEILING | 2M - 3000K

LAMPING

Source	Linear LED
Total power	30W
Emission	Diffused
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1720lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM < 3
Typ CRI	97
Energy class	F
IP class	40
Dimensions	2,25x1,35x201mm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 0,5m; driver not included

Customization options

1-10V, DALI, DMX, Casambi, LED colour temperatures, body length

Accessories

Drivers 24VDC + DALI interface,

Net lamp weight

0,90 kg

Codes

BSLA0420G26WAA

Structure

grey

PACKAGE

Package 01


Dimension: 205x11x2,5 cm / Gross weight: 0,90 kg

Certificazioni



NEMO


SUSPENDED

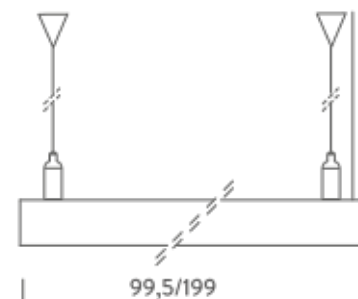





CEILING



RECESSED

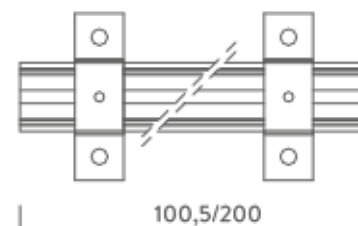

WALL MOUNTED

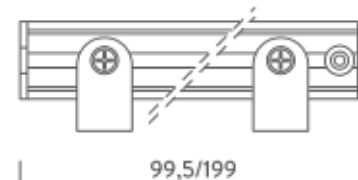

CEILING | 2M - 4000K

LAMPING

Source	Linear LED
Total power	30W
Emission	Diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1780lm
Initial luminaire efficacy	59lm/W
Initial chromaticity	SDCM < 3
Typ CRI	94
Energy class	E
IP class	40
Dimensions	2,25x1,35x201mm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 0,5m; driver not included

Customization options

1-10V, DALI, DMX, Casambi, LED colour temperatures, body length

Accessories

Drivers 24VDC + DALI interface,

Net lamp weight

0,90 kg

Codes

BSLA0420G26NAA

Structure

grey

PACKAGE

Package 01


Dimension: 205x11x2,5 cm / Gross weight: 0,90 kg

Certificazioni



NEMO


SUSPENDED

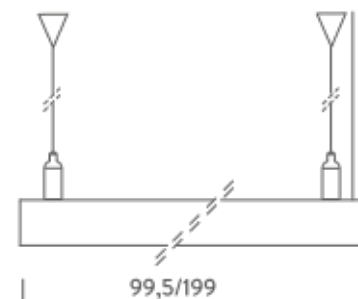





CEILING



RECESSED

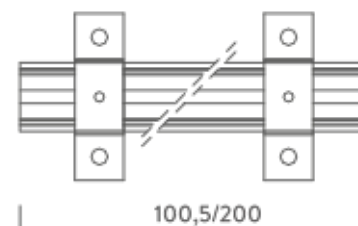

WALL MOUNTED

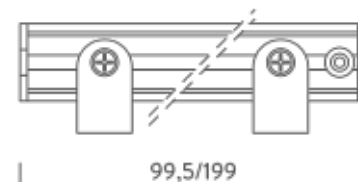

WALL | 1M - 3000K

LAMPING

Source	Linear LED
Total power	15W
Emission	Diffused
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	860lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM < 3
Typ CRI	97
Energy class	F
IP class	40
Dimensions	2,25x2,15x99,5cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	cable 0,5m; driver not included
Customization options	1-10V, DALI, DMX, Casambi, LED colour temperatures, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,45 kg

Codes

BSLA4010G26WAA

Structure

grey

PACKAGE



Package 01

Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg

Certificazioni




SUSPENDED

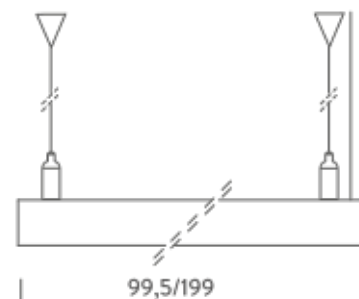



CEILING



RECESSED

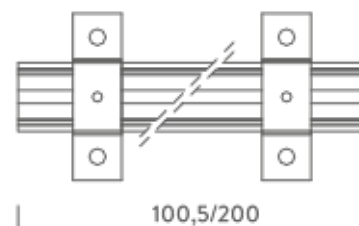

WALL MOUNTED

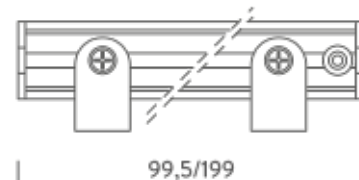

WALL | 1M - 4000K

LAMPING

Source	Linear LED
Total power	15W
Emission	Diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	890lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM < 3
Typ CRI	94
Energy class	E
IP class	40
Dimensions	2,25x2,15x99,5cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 0,5m; driver not included

Customization options

1-10V, DALI, DMX, Casambi, LED colour temperatures, body length

Accessories

Drivers 24VDC + DALI interface,

Net lamp weight

0,45 kg

Codes

BSLA4010G26NAA

Structure

grey

PACKAGE

Package 01


Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg

Certificazioni



NEMO


SUSPENDED

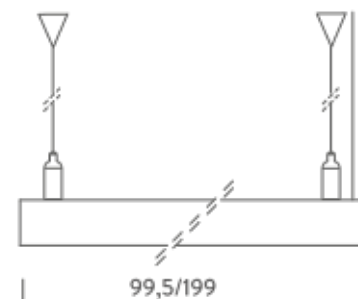





CEILING



RECESSED

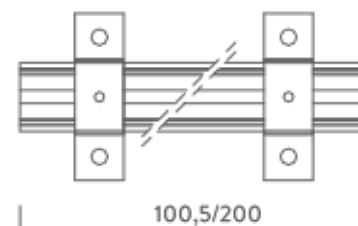

WALL MOUNTED

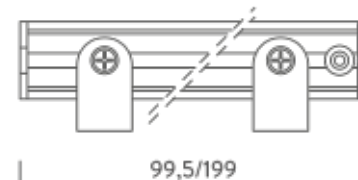

WALL | 2M - 3000K

LAMPING

Source	Linear LED
Total power	30W
Emission	Diffused
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1720lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM < 3
Typ CRI	97
Energy class	F
IP class	40
Dimensions	2,25x2,15x199cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	cable 0,5m; driver not included
Customization options	1-10V, DALI, DMX, Casambi, LED colour temperatures, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,90 kg

Codes

BSLA4020G26WAA

Structure

grey

PACKAGE



Package 01

Dimension: 205x11x2,5 cm / Gross weight: 0,90 kg


Certificazioni





SUSPENDED

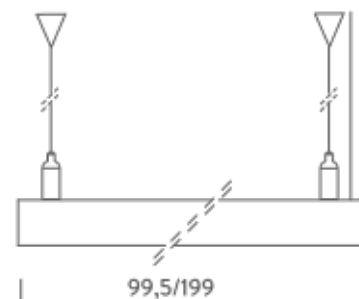



CEILING

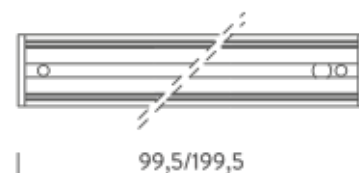

RECESSED

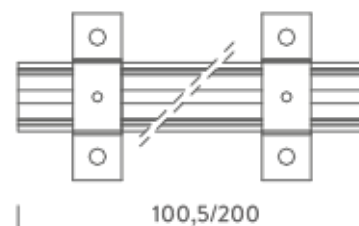

WALL MOUNTED

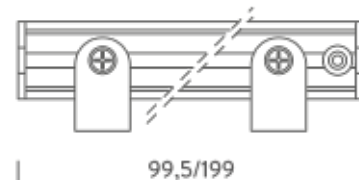

WALL | 2M - 4000K

LAMPING

Source	Linear LED
Total power	30W
Emission	Diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1780lm
Initial luminaire efficacy	59lm/W
Initial chromaticity	SDCM < 3
Typ CRI	94
Energy class	E
IP class	40
Dimensions	2,25x2,15x199cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 0,5m; driver not included

Customization options

1-10V, DALI, DMX, Casambi, LED colour temperatures, body length

Accessories

Drivers 24VDC + DALI interface,

Net lamp weight

0,90 kg

Codes

BSLA4020G26NAA

Structure

grey

PACKAGE

Package 01



Dimension: 205x11x2,5 cm / Gross weight: 0,90 kg

Certificazioni



NEMO



SUSPENDED

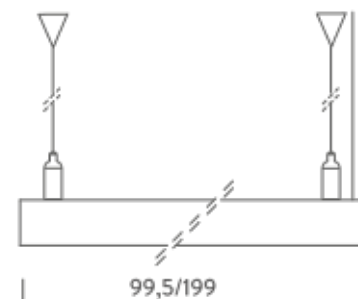

CEILING



RECESSED

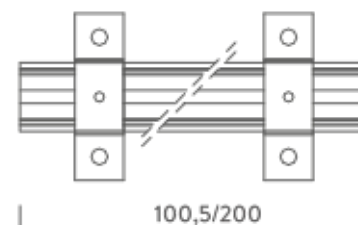

WALL MOUNTED

