

RIGA TRANSPARENT

Die RIGA-Familie umfasst flexible LED-Streifen für den Außenbereich, die sich besonders für eine dekorative Beleuchtung eignen.

Riga besteht aus einem 24V LED-Brand in einem weißen PVC-Profil, mit transparentem Polyurethanharz versiegelt, witterungsbeständig und mit einem hervorragendem Schutz gegen UV-Strahlen.

Bei der Riga mit transparentem Polyurethanharz wird das Licht von vorne ausgestrahlt.

Riga ist in unterschiedlichen Standardlängen lieferbar.

Die Installation kann mit Halterungen (im Lieferumfang enthalten) erfolgen.



1M | 2700K

LAMPING

Source	Flexible linear LED
Total power	9,6W
Emission	Direct 120°
Tension	24VDC
Color temperature	2700K
Luminous flux	1400lm
Initial luminaire efficacy	150lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x0,7x100cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,21 kg

Codes

MRIG0910035DRE

PACKAGE

Package 01


Certificazioni



Structure

white

Dimension: 22x19x8 cm / Gross weight: 0,81 kg

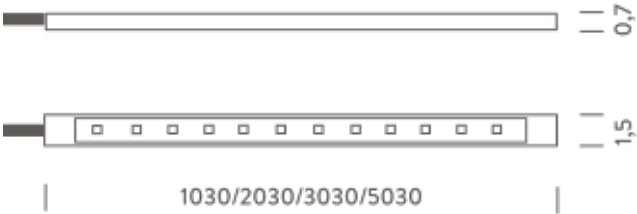

BRACKETS (included)



2M | 2700K

LAMPING

Source	Flexible linear LED
Total power	19,2W
Emission	Direct 120°
Tension	24VDC
Color temperature	2700K
Luminous flux	2800lm
Initial luminaire efficacy	150lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x0,7x200cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,48 kg

Codes

MRIG0920035DRE

PACKAGE

Package 01


Certificazioni



Structure

white

Dimension: 42x42x4,5 cm / Gross weight: 0,84 kg

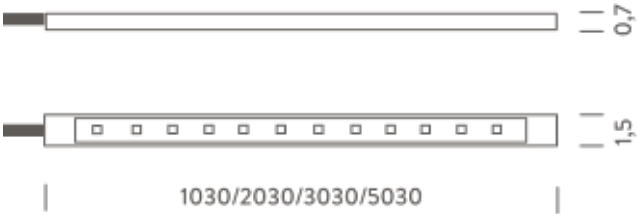

BRACKETS (included)



3M | 2700K

LAMPING

Source	Flexible linear LED
Total power	28,8W
Emission	Direct 120°
Tension	24VDC
Color temperature	2700K
Luminous flux	4200lm
Initial luminaire efficacy	150lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x0,7x300cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,72 kg

Codes

MRIG0930035DRE

Structure


white

PACKAGE

Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,08 kg

Certificazioni

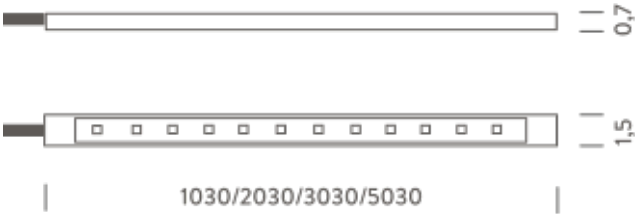

BRACKETS (included)



4M | 2700K

LAMPING

Source	Flexible linear LED
Total power	38,4W
Emission	Direct 120°
Tension	24VDC
Color temperature	2700K
Luminous flux	5600lm
Initial luminaire efficacy	150lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x0,7x400cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,96 kg

Codes


MRIG0940035DRE

PACKAGE

Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,32 kg

Certificazioni

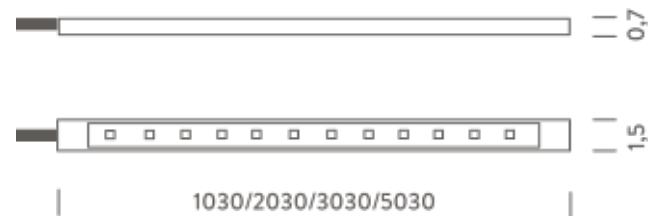

BRACKETS (included)



5M | 2700K

LAMPING

Source	Flexible linear LED
Total power	48W
Emission	Direct 120°
Tension	24VDC
Color temperature	2700K
Luminous flux	7000lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x0,7x500cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	1,2 kg

Codes

MRIG0950035DRE

PACKAGE

Package 01


Certificazioni



Structure

white

Dimension: 42x42x4,5 cm / Gross weight: 0,99 kg

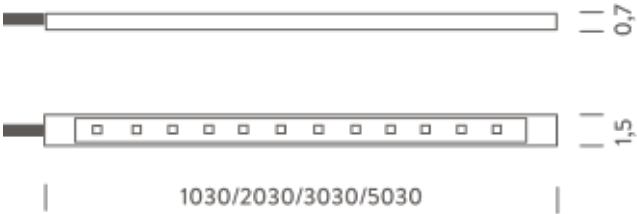

BRACKETS (included)

