

RIGA OPAL

Die RIGA-Familie umfasst flexible LED-Streifen für den Außenbereich, die sich besonders für eine dekorative Beleuchtung eignen.

Riga besteht aus einem 24V LED-Brand in einem weißen PVC-Profil, mit opalem Polyurethanharz versiegelt, witterungsbeständig und mit einem hervorragendem Schutz gegen UV-Strahlen.

Riga mit opalem Polyurethanharz ermöglicht je nach Kurvenmöglichkeit des LED-Streifens Front- oder Seitenlicht.

Riga ist in unterschiedenen Standardlängen lieferbar.

Die Installation kann mit Halterungen (im Lieferumfang enthalten) erfolgen.



1M | 3000K - FRONT LIGHT

LAMPING

Source	Flexible linear LED
Total power	9,6W
Emission	Diffused orientable
Tension	24VDC
Color temperature	3000K
Luminous flux	510lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x100cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,39 kg

Codes

MRIG0910G35WFL

Structure

white

PACKAGE


Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,47 kg

Certificazioni



RIGA OPAL

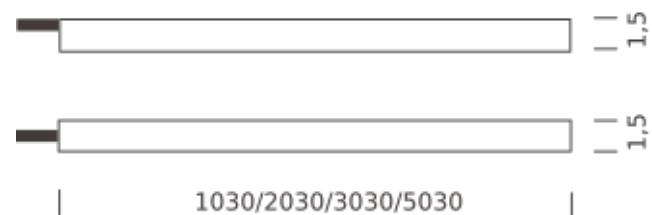

BRACKETS (included)



1M | 3000K - SIDE LIGHT

LAMPING

Source	Flexible linear LED
Total power	9,6W
Emission	Diffused orientable
Tension	24VDC
Color temperature	3000K
Luminous flux	510lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x100cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,39 kg

Codes
MRIG0910G35WSL


PACKAGE

Package 01 Dimension: 42x42x4,5 cm / Gross weight: 1,47 kg

Certificazioni



RIGA OPAL

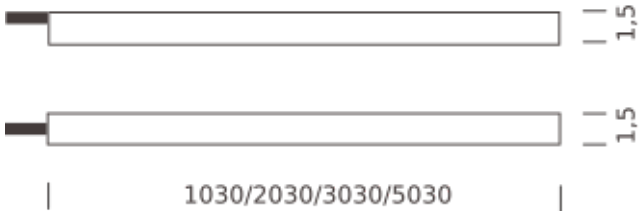

BRACKETS (included)



1M | 4000K - FRONT LIGHT

LAMPING

Source	Flexible linear LED
Total power	9,6W
Emission	Diffused orientable
Tension	24VDC
Color temperature	4000K
Luminous flux	600lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x100cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,39 kg

Codes

MRIG0910G35NFL

Structure

white

PACKAGE


Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,47 kg

Certificazioni



RIGA OPAL

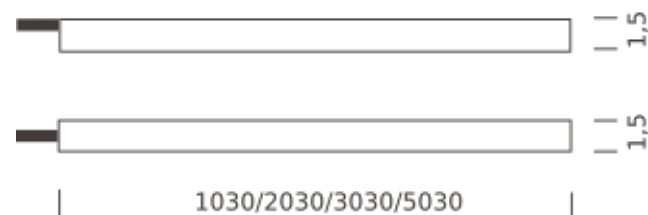

BRACKETS (included)



1M | 4000K - SIDE LIGHT

LAMPING

Source	Flexible linear LED
Total power	9,6W
Emission	Diffused orientable
Tension	24VDC
Color temperature	4000K
Luminous flux	600lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x100cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,39 kg

Codes

MRIG0910G35NSL

PACKAGE

Package 01

Certificazioni




Structure

white

Dimension: 42x42x4,5 cm / Gross weight: 1,47 kg

RIGA OPAL

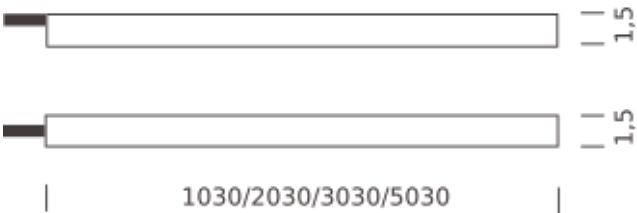

BRACKETS (included)



2M | 3000K - FRONT LIGHT

LAMPING

Source	Flexible linear LED
Total power	19,2W
Emission	Diffused orientable
Tension	24VDC
Color temperature	3000K
Luminous flux	1020lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x200cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,86 kg

Codes

MRIG0920G35WFL

PACKAGE

Package 01

Structure


white

Dimension: 42x42x4,5 cm / Gross weight: 1,51 kg

Certificazioni



RIGA OPAL

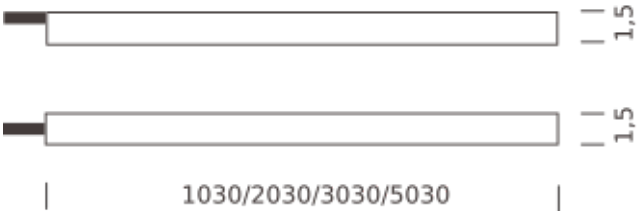

BRACKETS (included)



2M | 3000K - SIDE LIGHT

LAMPING

Source	Flexible linear LED
Total power	19,2W
Emission	Diffused orientable
Tension	24VDC
Color temperature	3000K
Luminous flux	1020lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x200cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,86 kg

Codes

MRIG0920G35WSL

PACKAGE

Package 01

Certificazioni




Structure

white

Dimension: 42x42x4,5 cm / Gross weight: 1,51 kg

RIGA OPAL

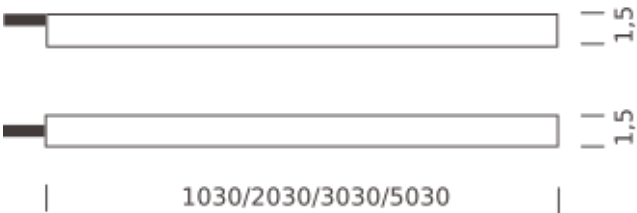

BRACKETS (included)



2M | 4000K - FRONT LIGHT

LAMPING

Source	Flexible linear LED
Total power	19,2W
Emission	Diffused orientable
Tension	24VDC
Color temperature	4000K
Luminous flux	1200lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x200cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,86 kg

Codes

MRIG0920G35NFL

PACKAGE

Package 01

Certificazioni




Structure

white

Dimension: 42x42x4,5 cm / Gross weight: 1,51 kg

RIGA OPAL

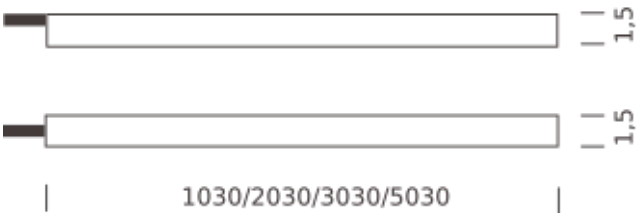

BRACKETS (included)



2M | 4000K - SIDE LIGHT

LAMPING

Source	Flexible linear LED
Total power	19,2W
Emission	Diffused orientable
Tension	24VDC
Color temperature	4000K
Luminous flux	1200lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x200cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,86 kg

Codes

MRIG0920G35NSL

Structure

white

PACKAGE


Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,51 kg

Certificazioni



RIGA OPAL

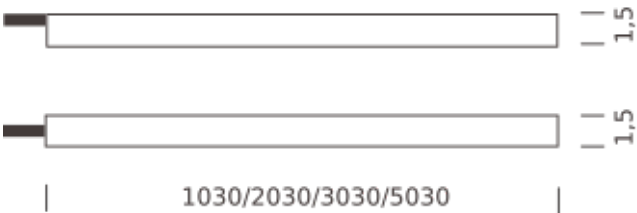

BRACKETS (included)



3M | 3000K - FRONT LIGHT

LAMPING

Source	Flexible linear LED
Total power	28,8W
Emission	Diffused orientable
Tension	24VDC
Color temperature	3000K
Luminous flux	1530lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x300cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	1,3 kg

Codes

MRIG0930G35WFL

Structure

white

PACKAGE


Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,94 kg

Certificazioni



RIGA OPAL

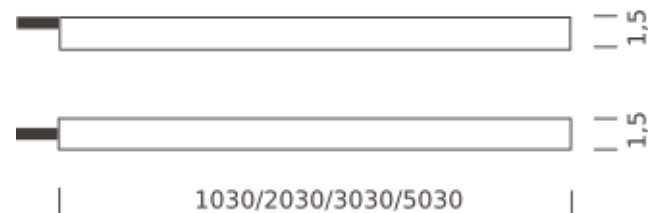

BRACKETS (included)



3M | 3000K - SIDE LIGHT

LAMPING

Source	Flexible linear LED
Total power	28,8W
Emission	Diffused orientable
Tension	24VDC
Color temperature	3000K
Luminous flux	1530lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x300cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	1,3 kg

Codes

MRIG0930G35WSL

Structure

white

PACKAGE


Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,94 kg

Certificazioni



RIGA OPAL

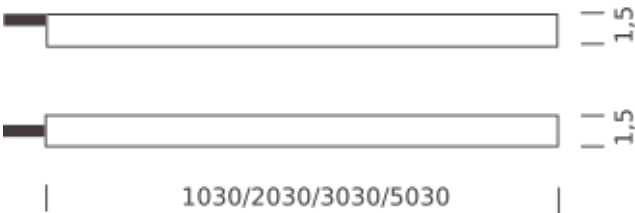

BRACKETS (included)



3M | 4000K - FRONT LIGHT

LAMPING

Source	Flexible linear LED
Total power	28,8W
Emission	Diffused orientable
Tension	24VDC
Color temperature	4000K
Luminous flux	1800lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x300cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	1,3 kg

Codes

MRIG0930G35NFL

Structure

white

PACKAGE


Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,94 kg

Certificazioni



RIGA OPAL

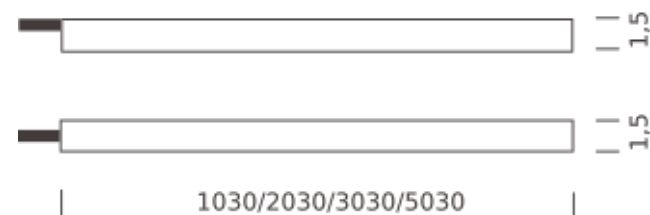

BRACKETS (included)



3M | 4000K - SIDE LIGHT

LAMPING

Source	Flexible linear LED
Total power	28,8W
Emission	Diffused orientable
Tension	24VDC
Color temperature	4000K
Luminous flux	1800lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x300cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	1,3 kg

Codes

MRIG0930G35NSL

Structure

white

PACKAGE


Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,94 kg

Certificazioni



RIGA OPAL

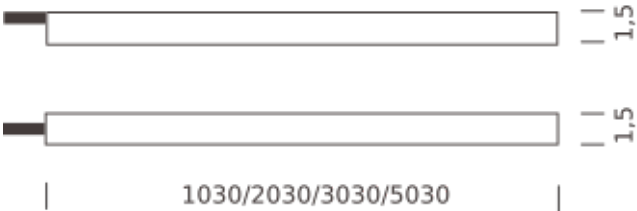

BRACKETS (included)



4M | 3000K - FRONT LIGHT

LAMPING

Source	Flexible linear LED
Total power	38,4W
Emission	Diffused orientable
Tension	24VDC
Color temperature	3000K
Luminous flux	2040lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x400cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	1,78 kg

Codes

MRIG0940G35WFL

Structure

white

PACKAGE


Package 01

Dimension: 42x42x4,5 cm / Gross weight: 2,38 kg

Certificazioni



RIGA OPAL

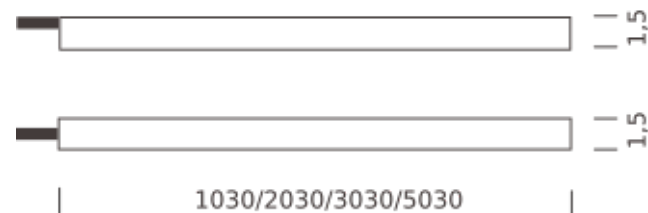

BRACKETS (included)



4M | 3000K - SIDE LIGHT

LAMPING

Source	Flexible linear LED
Total power	38,4W
Emission	Diffused orientable
Tension	24VDC
Color temperature	3000K
Luminous flux	2040lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x400cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	1,78 kg

Codes

MRIG0940G35WSL

Structure

white

PACKAGE


Package 01

Dimension: 42x42x4,5 cm / Gross weight: 2,38 kg

Certificazioni



RIGA OPAL

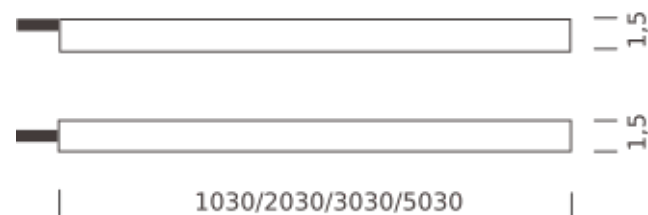

BRACKETS (included)



4M | 4000K - FRONT LIGHT

LAMPING

Source	Flexible linear LED
Total power	38,4W
Emission	Diffused orientable
Tension	24VDC
Color temperature	4000K
Luminous flux	2400lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x400cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	1,78 kg

Codes

MRIG0940G35NFL

Structure

white

PACKAGE


Package 01

Dimension: 42x42x4,5 cm / Gross weight: 2,38 kg

Certificazioni



RIGA OPAL

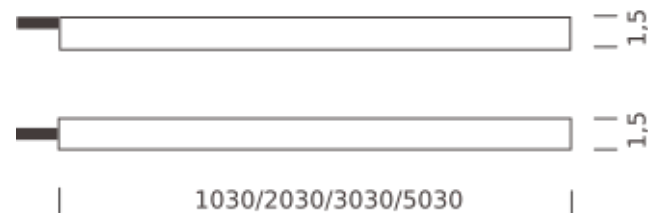

BRACKETS (included)



4M | 4000K - SIDE LIGHT

LAMPING

Source	Flexible linear LED
Total power	38,4W
Emission	Diffused orientable
Tension	24VDC
Color temperature	4000K
Luminous flux	2400lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x400cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	1,78 kg

Codes

MRIG0940G35NSL

Structure

white

PACKAGE


Package 01

Dimension: 42x42x4,5 cm / Gross weight: 2,38 kg

Certificazioni



RIGA OPAL

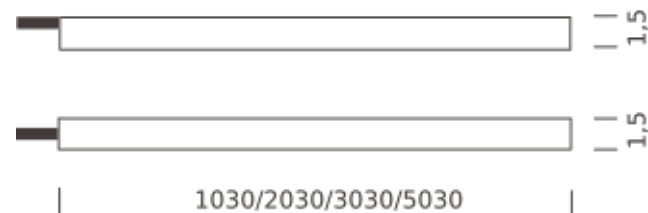

BRACKETS (included)



5M | 3000K - FRONT LIGHT

LAMPING

Source	Flexible linear LED
Total power	48W
Emission	Diffused orientable
Tension	24VDC
Color temperature	3000K
Luminous flux	2550lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x500cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	2,16 kg

Codes

MRIG0950G35WFL

Structure

white

PACKAGE


Package 01

Dimension: 42x42x4,5 cm / Gross weight: 0,99 kg

Certificazioni



RIGA OPAL

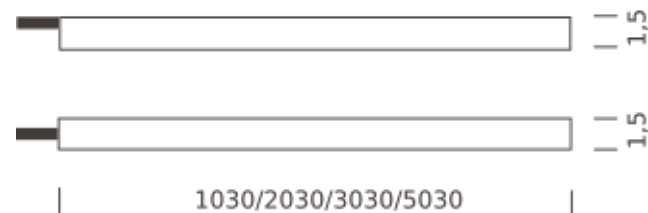

BRACKETS (included)



5M | 3000K - SIDE LIGHT

LAMPING

Source	Flexible linear LED
Total power	48W
Emission	Diffused orientable
Tension	24VDC
Color temperature	3000K
Luminous flux	2550lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x500cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	2,16 kg

Codes

MRIG0950G35WSL

PACKAGE

Package 01

Structure


white

Dimension: 42x42x4,5 cm / Gross weight: 0,99 kg

Certificazioni



RIGA OPAL

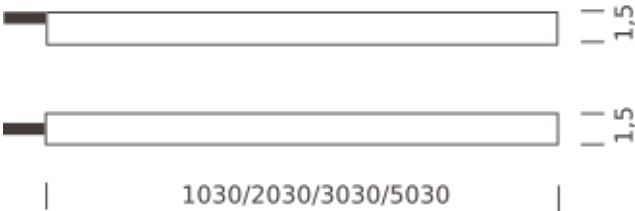

BRACKETS (included)



5M | 4000K - FRONT LIGHT

LAMPING

Source	Flexible linear LED
Total power	48W
Emission	Diffused orientable
Tension	24VDC
Color temperature	4000K
Luminous flux	3000lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x500cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	2,16 kg

Codes

MRIG0950G35NFL

Structure

white

PACKAGE


Package 01

Dimension: 42x42x4,5 cm / Gross weight: 0,99 kg

Certificazioni



RIGA OPAL

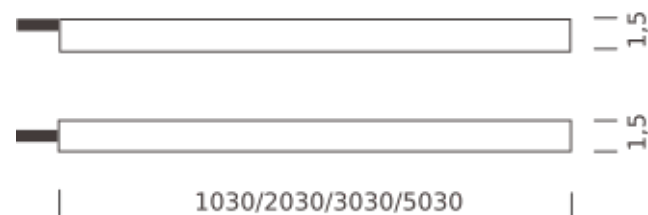

BRACKETS (included)



5M | 4000K - SIDE LIGHT

LAMPING

Source	Flexible linear LED
Total power	48W
Emission	Diffused orientable
Tension	24VDC
Color temperature	4000K
Luminous flux	3000lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x500cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	2,16 kg

Codes

MRIG0950G35NSL

Structure

white

PACKAGE


Package 01

Dimension: 42x42x4,5 cm / Gross weight: 2,38 kg

Certificazioni



RIGA OPAL

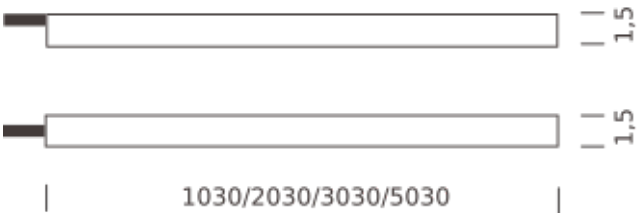

BRACKETS (included)

