

LUX RECESSED

Die LUX-Kollektion umfasst eine Auswahl an kleinen, leistungsstarken Strahlern für die Innen- und Außenbeleuchtung.

Lux Recessed ist ideal für die streifenförmige Beleuchtung von Fassaden oder Wegen ist eine Familie von wasserdichten LED-Einbauleuchten für den Außenbereich. Lux Recessed ist in 2 Wattstärken erhältlich, um maximale Flexibilität für unterschiedliche Anforderungen zu ermöglichen.

Die Strahler der Lux-Kollektion werden in verschiedenen Ausführungen und mit zwei Optiken angeboten, die für einen konzentrierteren oder breiteren Lichtausstrahlwinkel erhältlich sind.



4,2W | 3000K - 17°

LAMPING

Source	LED
Total power	4.2W
Emission	direct
Switching	according to driver
Tension	350mA
Color temperature	3000K
Luminous flux	366lm
Initial luminaire efficacy	87lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	Ø5.25x7
Materials	anodized aluminum
Ambient temperature range	-20°C/35°
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	cable 1m, recessed box LUXCASSA4 not included, driver not included. compatible control: 1-10V, DALI, DMX, Casambi
Customization options	2700K
Accessories	Drivers 350mA, Recessed box, Recessed box cassa 4
Net lamp weight	0.28 kg

Codes

BLUR1901N21WAA
BLUR1901N21WAN

Structure/Diffuser

grey/transparent diffuser
black/transparent diffuser

PACKAGE

Package 01 Dimension: 11,50x11x8 cm / Gross weight: 0,32 kg

Certificazioni




LUX RECESSED 4,2W



| Ø 5,2 |

LUX RECESSED 12W



| Ø 12,4 |

4,2W | 3000K - 46°

LAMPING

Source	LED
Total power	4.2W
Emission	direct
Switching	according to driver
Tension	350mA
Color temperature	3000K
Luminous flux	372lm
Initial luminaire efficacy	89lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	Ø5.25x7
Materials	anodized aluminum
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	cable 1m, recessed box LUXCASSA4 not included, driver not included. compatible control: 1-10V, DALI, DMX, Casambi
Customization options	2700K
Accessories	Drivers 350mA, Recessed box, Recessed box cassa 4
Net lamp weight	0.28 kg

Codes

BLUR1901F21WAA
BLUR1901F21WAN

Structure/Diffuser

grey/transparent diffuser
black/transparent diffuser


PACKAGE

Package 01 Dimension: 11,50x11x8 cm / Gross weight: 0,32 kg

Certificazioni




LUX RECESSED 4,2W



| Ø 5,2 |

LUX RECESSED 12W



| Ø 12,4 |

4,2W | 4000K - 17°

LAMPING

Source	LED
Total power	4.2W
Emission	direct
Switching	according to driver
Tension	350mA
Color temperature	4000K
Luminous flux	366lm
Initial luminaire efficacy	87lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	Ø5.25x7
Materials	anodized aluminum
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	cable 1m, recessed box LUXCASSA4 not included, driver not included. compatible control: 1-10V, DALI, DMX, Casambi
Customization options	2700K
Accessories	Drivers 350mA, Recessed box, Recessed box cassa 4
Net lamp weight	0.28 kg

Codes

BLUR1901N21NAA
BLUR1901N21NAN

Structure/Diffuser

grey/transparent diffuser
black/transparent diffuser


PACKAGE

Package 01 Dimension: 11,50x11x8 cm / Gross weight: 0,32 kg

Certificazioni




LUX RECESSED 4,2W



| Ø 5,2 |

LUX RECESSED 12W



| Ø 12,4 |

4,2W | 4000K - 46°

LAMPING

Source	LED
Total power	4.2W
Emission	direct
Switching	according to driver
Tension	350mA
Color temperature	4000K
Luminous flux	372lm
Initial luminaire efficacy	89lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	90
Dimensions	Ø5.25x7
Materials	anodized aluminum
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	cable 1m, recessed box LUXCASSA4 not included, driver not included. compatible control: 1-10V, DALI, DMX, Casambi
Customization options	2700K
Accessories	Drivers 350mA, Recessed box, Recessed box cassa 4
Net lamp weight	0.28 kg

Codes

BLUR1901F21NAA
BLUR1901F21NAN

Structure/Diffuser

grey/transparent diffuser
black/transparent diffuser


PACKAGE

Package 01 Dimension: 11,50x11x8 cm / Gross weight: 0,32 kg

Certificazioni




LUX RECESSED 4,2W



| Ø 5,2 |

LUX RECESSED 12W



| Ø 12,4 |

12W | 2700K - 14°

LAMPING

Source	LED spot
Total power	12W
Emission	direct
Switching	according to driver
Tension	350mA
Color temperature	2700K
Luminous flux	1040lm
Initial luminaire efficacy	87lm/W
Initial chromaticity	SDCM<3
Typ CRI	>90
IP class	67
Dimensions	ø12,4x9,4
Ambient temperature range	-20°C/35°
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	cable length 2m, BLUXR12BOX and BLUXHC66 not included, driver not included. Compatible control: 1-10V, DALI, TRIAC, series connection
Net lamp weight	1 kg

Codes

BLUR1901N43DAA
BLUR1901N43DAN

Structure

grey
black


PACKAGE

Package 01 Dimension: 23,50x15x11 cm / Gross weight: 1,15 kg

Certificazioni




LUX RECESSED 4,2W



| Ø 5,2 |

LUX RECESSED 12W



| Ø 12,4 |

12W | 2700K - 53°

LAMPING

Source	LED spot
Total power	12W
Emission	direct
Switching	according to bulb
Tension	350mA
Color temperature	2700K
Luminous flux	900lm
Initial luminaire efficacy	75lm/W
Initial chromaticity	SDCM<3
Typ CRI	>90
IP class	67
Dimensions	ø12,4x9,4
Ambient temperature range	-20°C/35°
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	cable length 2m, BLUXR12BOX and BLUXHC66 not included, driver not included. Compatible control: 1-10V, DALI, TRIAC, series connection
Net lamp weight	1 kg

Codes

BLUR1901H43DAA
BLUR1901H43DAN

Structure

grey
black


PACKAGE

Package 01 Dimension: 23,50x15x11 cm / Gross weight: 1,15 kg

Certificazioni




LUX RECESSED 4,2W



| Ø 5,2 |

LUX RECESSED 12W



| Ø 12,4 |

12W | 3000K - 14°

LAMPING

Source	LED spot
Total power	12W
Emission	direct
Switching	according to bulb
Tension	350mA
Color temperature	3000K
Luminous flux	1100lm
Initial luminaire efficacy	92lm/W
Initial chromaticity	SDCM<3
Typ CRI	>90
IP class	67
Dimensions	ø12,4x9,4
Ambient temperature range	-20°C/35°
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	cable length 2m, BLUXR12BOX and BLUXHC66 not included, driver not included. Compatible control: 1-10V, DALI, TRIAC, series connection
Net lamp weight	1 kg

Codes

BLUR1901N43WAA
BLUR1901N43WAN

Structure

grey
black


PACKAGE

Package 01 Dimension: 23,50x15x11 cm / Gross weight: 1,15 kg

Certificazioni




LUX RECESSED 4,2W



| Ø 5,2 |

LUX RECESSED 12W



| Ø 12,4 |

12W | 3000K - 53°

LAMPING

Source	LED spot
Total power	12W
Emission	direct
Switching	according to bulb
Tension	350mA
Color temperature	3000K
Luminous flux	950lm
Initial luminaire efficacy	80lm/W
Initial chromaticity	SDCM<3
Typ CRI	>90
IP class	67
Dimensions	ø12,4x9,4
Ambient temperature range	-20°C/35°
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	cable length 2m, BLUXR12BOX and BLUXHC66 not included, driver not included. Compatible control: 1-10V, DALI, TRIAC, series connection
Net lamp weight	1 kg

Codes

BLUR1901H43WAA
BLUR1901H43WAN

Structure

grey
black


PACKAGE

Package 01 Dimension: 23,50x15x11 cm / Gross weight: 1,15 kg

Certificazioni




LUX RECESSED 4,2W



| Ø 5,2 |

LUX RECESSED 12W



| Ø 12,4 |

12W | 4000K - 14°

LAMPING

Source	LED spot
Total power	12W
Emission	direct
Switching	according to bulb
Tension	350mA
Color temperature	4000K
Luminous flux	1200lm
Initial luminaire efficacy	100lm/W
Initial chromaticity	SDCM<3
Typ CRI	>90
IP class	67
Dimensions	ø12,4x9,4
Ambient temperature range	-20°C/35°
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	cable length 2m, BLUXR12BOX and BLUXHC66 not included, driver not included. Compatible control: 1-10V, DALI, TRIAC, series connection
Net lamp weight	1 kg

Codes

BLUR1901N43NAA
BLUR1901N43NAN

Structure

grey
black

PACKAGE

Package 01 Dimension: 23,50x15x11 cm / Gross weight: 1,15 kg


Certificazioni



LUX RECESSED 4,2W



LUX RECESSED 12W

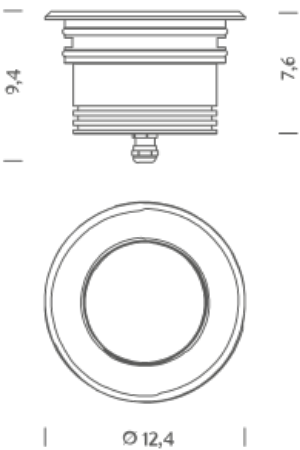

12W | 4000K - 53°

LAMPING

Source	LED spot
Total power	12W
Emission	direct
Switching	according to bulb
Tension	350mA
Color temperature	4000K
Luminous flux	1050lm
Initial luminaire efficacy	88lm/W
Initial chromaticity	SDCM<3
Typ CRI	<90
IP class	67
Dimensions	ø12,4x9,4
Ambient temperature range	-20°C/35°
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	cable length 2m, BLUXR12BOX and BLUXHC66 not included, driver not included. Compatible control: 1-10V, DALI, TRIAC, series connection
Net lamp weight	1 kg

Codes

BLUR1901H43NAA
BLUR1901H43NAN

Structure

grey
black


PACKAGE

Package 01 Dimension: 23,50x15x11 cm / Gross weight: 1,15 kg

Certificazioni




LUX RECESSED 4,2W



| Ø 5,2 |

LUX RECESSED 12W



| Ø 12,4 |