

LUX W-S

LUX W ist eine Wandstrahler-Kollektion für die Akzent- und Dekorationsbeleuchtung von Fassaden. Die Spots sind aus eloxiertem Aluminium in naturgrauer oder schwarzer Ausführung gefertigt. Erhältlich mit einfachem und doppeltem Lichtaustritt und in verschiedenen Farbtemperaturen und optischen Ausstrahlungen. Der Körper ist während der Installation drehbar und ermöglicht die Anpassung des Lichts an die spezifischen Projektanforderungen. Farbwiedergabeindex > 90 und Wandbefestigung über einen Sockel mit integriertem Treiber.



3000K | 17°

LAMPING

| | |
|---------------------------------|-------------------|
| Source | LED |
| Total power | 4.2W |
| Emission | single direct |
| Switching | on/off |
| Tension | 220/240V |
| Color temperature | 3000K |
| Luminous flux | 366lm |
| Initial luminaire efficacy | 90lm/W |
| Initial chromaticity | SDCM<3 |
| Typ CRI | 90 |
| IP class | 65 |
| Dimensions | 9.6xØ7.25x9.9 |
| Materials | anodized aluminum |
| Ambient temperature range | -20°C/35°C |
| Performance ambient temperature | 25°C |
| Notes | driver included |
| Net lamp weight | 0.49 kg |

Codes

BLUW4101N21WAA
BLUW4101N21WAN


Structure

grey
black

PACKAGE

Package 01 Dimension: 14,5x10x9,5 cm / Gross weight: 0,54 kg

Certificazioni

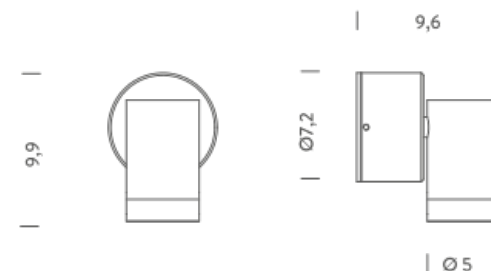

3000K | 46°

LAMPING

| | |
|---------------------------------|-------------------|
| Source | LED |
| Total power | 4.2W |
| Emission | single direct |
| Switching | on/off |
| Tension | 220/240V |
| Color temperature | 3000K |
| Luminous flux | 372lm |
| Initial luminaire efficacy | 90lm/W |
| Initial chromaticity | SDCM<3 |
| Typ CRI | 90 |
| IP class | 65 |
| Dimensions | 9.6xØ7.25x9.9 |
| Materials | anodized aluminum |
| Ambient temperature range | -20°C/35°C |
| Performance ambient temperature | 25°C |
| Notes | driver included |
| Net lamp weight | 0.49 kg |

Codes

BLUW4101F21WAA
BLUW4101F21WAN


Structure

grey
black

PACKAGE

Package 01 Dimension: 14,5x10x9,5 cm / Gross weight: 0,54 kg

Certificazioni

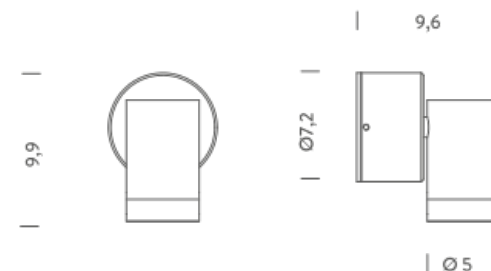

4000K | 17°

LAMPING

| | |
|---------------------------------|-------------------|
| Source | LED |
| Total power | 4.2W |
| Emission | single direct |
| Switching | on/off |
| Tension | 220/240V |
| Color temperature | 4000K |
| Luminous flux | 366lm |
| Initial luminaire efficacy | 90lm/W |
| Initial chromaticity | SDCM<3 |
| Typ CRI | 90 |
| IP class | 65 |
| Dimensions | 9.6xØ7.25x9.9 |
| Materials | anodized aluminum |
| Ambient temperature range | -20°C/35°C |
| Performance ambient temperature | 25°C |
| Notes | driver included |
| Net lamp weight | 0.49 kg |

Codes

BLUW4101N21NAA
BLUW4101N21NAN


Structure

grey
black

PACKAGE

Package 01 Dimension: 14,5x10x9,5 cm / Gross weight: 0,54 kg

Certificazioni

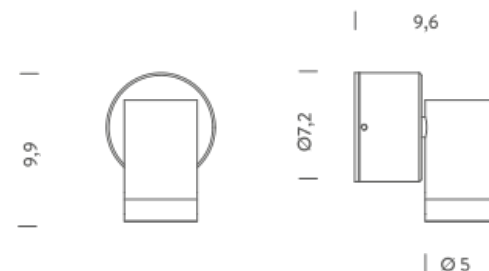

4000K | 46°

LAMPING

| | |
|---------------------------------|-------------------|
| Source | LED |
| Total power | 4.2W |
| Emission | single direct |
| Switching | on/off |
| Tension | 220/240V |
| Color temperature | 4000K |
| Luminous flux | 372lm |
| Initial luminaire efficacy | 90lm/W |
| Initial chromaticity | SDCM<3 |
| Typ CRI | 90 |
| IP class | 65 |
| Dimensions | 9.6xØ7.25x9.9 |
| Materials | anodized aluminum |
| Ambient temperature range | -20°C/35°C |
| Performance ambient temperature | 25°C |
| Notes | driver included |
| Net lamp weight | 0.49 kg |

Codes

BLUW4101F21NAA
BLUW4101F21NAN

Structure

grey
black

PACKAGE

Package 01 Dimension: 14,5x10x9,5 cm / Gross weight: 0,54 kg

Certificazioni

