

# LUX W-D

LUX W ist eine Wandstrahler-Kollektion für die Akzent- und Dekorationsbeleuchtung von Fassaden. Die Spots sind aus eloxiertem Aluminium in naturgrauer oder schwarzer Ausführung gefertigt. Erhältlich mit einfachem und doppeltem Lichtaustritt und in verschiedenen Farbtemperaturen und optischen Ausstrahlungen. Der Körper ist während der Installation drehbar und ermöglicht die Anpassung des Lichts an die spezifischen Projektanforderungen. Farb wiedergabeindex > 90 und Wandbefestigung über einen Sockel mit integriertem Treiber.



3000K | 17°

## LAMPING

Source	LED
Total power	8.4W
Emission	double direct
Switching	on/off
Tension	220/240V
Color temperature	3000K
Luminous flux	732lm
Initial luminaire efficacy	90lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	65
Dimensions	9.6xØ7.25x12.5
Materials	anodized aluminum
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	driver included
Net lamp weight	0.61 kg

## Codes

BLUW4102N21WAA  
BLUW4102N21WAN


## Structure

grey  
black

## PACKAGE

Package 01 Dimension: 14,4x14,2x9,3 cm / Gross weight: 0,66 kg

## Certificazioni

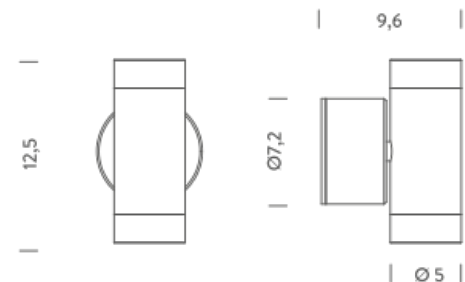

3000K | 46°

## LAMPING

Source	LED
Total power	8.4W
Emission	double direct
Switching	on/off
Tension	220/240V
Color temperature	3000K
Luminous flux	744lm
Initial luminaire efficacy	90lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	65
Dimensions	9.6xØ7.25x12.5
Materials	anodized aluminum
Ambient temperature range	-20°C/35°
Performance ambient temperature	25°C
Notes	driver included
Net lamp weight	0.61 kg

## Codes

BLUW4102F21WAA  
BLUW4102F21WAN


## Structure

grey  
black

## PACKAGE

Package 01 Dimension: 14,4x14,2x9,3 cm / Gross weight: 0,66 kg

## Certificazioni

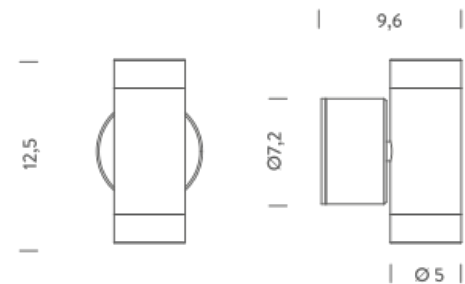

4000K | 17°

## LAMPING

Source	LED
Total power	8.4W
Emission	double direct
Switching	of/off
Tension	220/240V
Color temperature	4000K
Luminous flux	732lm
Initial luminaire efficacy	90lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	65
Dimensions	9.6xØ7.25x12.5
Materials	anodized aluminum
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	driver included

## Codes

BLUW4102N21NAA  
BLUW4102N21NAN


## Structure

grey  
black

## PACKAGE

Package 01 Dimension: 14,4x14,2x9,3 cm / Gross weight: 0,66 kg

## Certificazioni

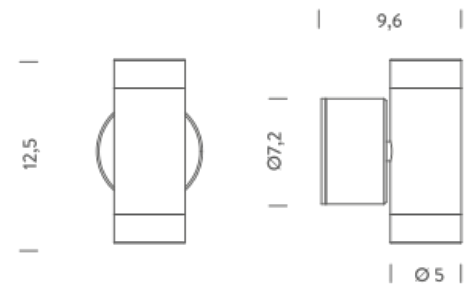

4000K | 46°

## LAMPING

Source	LED
Total power	8.4W
Emission	double direct
Switching	on/off
Tension	220/240V
Color temperature	4000K
Luminous flux	744lm
Initial luminaire efficacy	90lm/w
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	65
Dimensions	9.6xØ7.25x12.5
Materials	anodized aluminum
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	driver included
Net lamp weight	0.61 kg

## Codes

BLUW4102F21NAA  
BLUW4102F21NAN

## Structure

grey  
black

## PACKAGE

Package 01      Dimension: 14,4x14,2x9,3 cm / Gross weight: 0,66 kg

## Certificazioni

