

# ZIRKOL LINEAR UGR

Die neue Lampe in der Kollektion, ZIRKOL LINEAR UGR ist mit einer speziellen optischen Gruppe ausgestattet, die eine direkte Emission mit einem reduzierten Blendungsindex (UGR < 19) ermöglicht. Struktur in Aluminium, erhältlich in zwei Ausführungen und Farbtemperaturen.

Ausgestattet mit einem Baldachin und einem DALI-Steuerungssystem ist sie für Büros und Arbeitsplätze geplant, an denen ein hoher Sehkomfort erforderlich ist.



# DOWNLIGHT | 3000K

## LAMPING

Source	LED linear
Total power	45W
Emission	Direct   UGR<19
Switching	DALI
Tension	220/240V
Color temperature	3000K
Luminous flux	3600lm
Initial luminaire efficacy	> 87lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
Energy class	F
IP class	20
Dimensions	140x2,6x5
Materials	Aluminium
Performance ambient temperature	20° C

Notes remote driver, RAL 9005 black, RAL 9016 white.

Included: 1 driver, 1 driver box (40x5x4,5cm), 1 electrical cable length 3m, 2 adjustable metal cable length 3m (including ceiling attachment)

Net lamp weight 3,2 kg

## Codes

BZRL1614I42WBO

BZRL1614I42WNE

## Structure

white


black

## PACKAGE

Package 01

Dimension: 204x11x11 cm / Gross weight: 5 kg

## Certificazioni

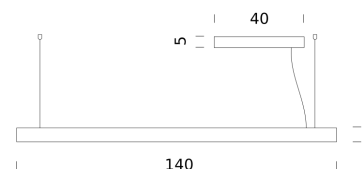

# DOWNLIGHT | 4000K

## LAMPING

Source	LED linear
Total power	45W
Emission	Direct   UGR<19
Switching	DALI
Tension	220/240V
Color temperature	4000K
Luminous flux	3700lm
Initial luminaire efficacy	> 87lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
Energy class	E
IP class	20
Dimensions	140x2,6x5
Materials	Aluminium
Performance ambient temperature	20° C

Notes remote driver, RAL 9005 black, RAL 9016 white.

Included: 1 driver, 1 driver box (40x5x4,5cm), 1 electrical cable length 3m, 2 adjustable metal cable length 3m (including ceiling attachment)

Net lamp weight 3,2 kg

## Codes

BZRL1614I42NBO

BZRL1614I42NNE

## Structure

white

black

## PACKAGE

Package 01

Dimension: 204x11x11 cm / Gross weight: 5 kg

## Certificazioni



# UP-DOWNLIGHT | 3000K

## LAMPING

Source	LED linear
Total power	60W
Emission	Direct   UGR<19 - Indirect diffused
Switching	DALI
Tension	220/240V
Color temperature	3000K
Luminous flux	4700lm
Initial luminaire efficacy	> 75 lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
Energy class	F
IP class	20
Dimensions	140x2,6x5
Materials	Aluminium
Performance ambient temperature	20° C

Notes remote driver, RAL 9005 black, RAL 9016 white.

Included: 1 driver, 1 driver box (40x5x4,5cm), 1 electrical cable length 3m, 2 adjustable metal cable length 3m (including ceiling attachment)

Net lamp weight 3,2 kg

## Codes

BZRL1714I49WBO

BZRL1714I49WNE

## Structure

white


black

## PACKAGE

Package 01

Dimension: 204x11x11 cm / Gross weight: 5 kg

## Certificazioni

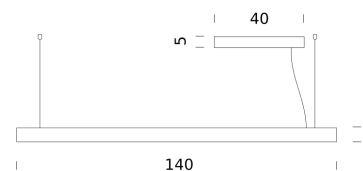

# UP-DOWNLIGHT | 4000K

## LAMPING

Source	LED linear
Total power	60W
Emission	Direct   UGR<19 - Indirect diffused
Switching	DALI
Tension	220/240V
Color temperature	4000K
Luminous flux	4900lm
Initial luminaire efficacy	> 75lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
Energy class	E
IP class	20
Dimensions	140x2,6x5
Materials	Aluminium
Performance ambient temperature	20° C

Notes remote driver, RAL 9005 black, RAL 9016 white.

Included: 1 driver, 1 driver box (40x5x4,5cm), 1 electrical cable length 3m, 2 adjustable metal cable length 3m (including ceiling attachment)

Net lamp weight 3,2 kg

## Codes

BZRL1714I49NBO

BZRL1714I49NNE

## Structure

white

black

## PACKAGE

Package 01

Dimension: 204x11x11 cm / Gross weight: 5 kg

## Certificazioni

