


# ZIRKOL CEILING

Dem modernen Purismus der Zirkol-Kollektion entspricht die neue Zirkol Ceiling: Nemo Studio bietet zum ersten Mal eine Deckenanwendung des Zirkol C an. Der harmonische kreisförmige Körper verschmilzt mit einem linearen Element, das den integrierten Treiber in einer magnetischen Box versteckt. Erhältlich in verschiedenen Größen, erfüllt Zirkol Ceiling sowohl private als auch professionelle Bedürfnisse und vermeidet die Installation von externem Zubehör.

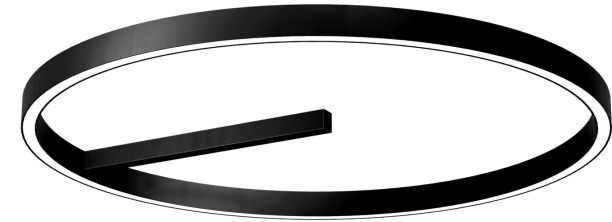

Ø 0,85M | 2700K

### LAMPING

Source	Linear LED
Total power	35W
Emission	Diffused
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	2000lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	ø 0,85m x 5cm
Materials	Aluminium
Notes	driver box with 1 x driver Superslim   RAL 9005 black   RAL 9016 white   shipped assembled

### Customization options

Lumen output, finish

### Codes

BZRCD408G15DBO  
BZRCD408G15DNE  
BZRCD408G15DOR




### Structure

white  
black  
matte gold

### Certificazioni



### ZIRKOL CEILING 0,85-1-1,5M

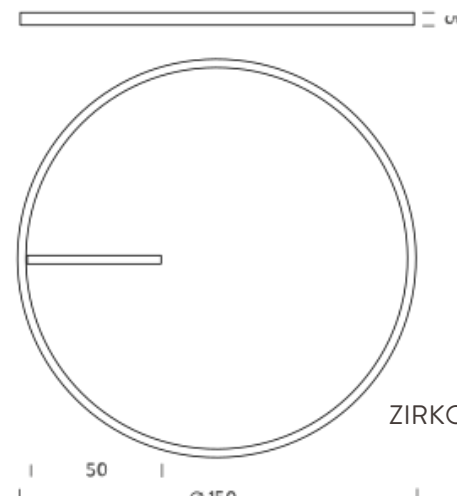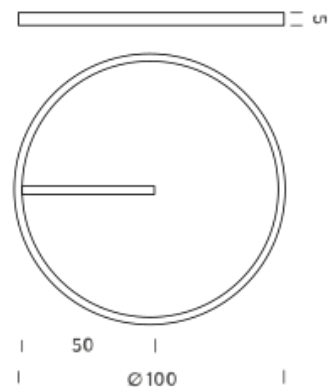

Ø 0,85M | 3000K

## LAMPING

Source	Linear LED
Total power	35W
Emission	Diffused
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	2200lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	ø 0,85m x 5cm
Materials	Aluminium
Notes	driver box with 1 x driver Superslim   RAL 9005 black   RAL 9016 white   shipped assembled
Customization options	Lumen output, finish

## Codes

BZRCD408G15WBO  
BZRCD408G15WNE  
BZRCD408G15WOR




## Structure

white  
black  
matte gold

## Certificazioni



## ZIRKOL CEILING 0,85-1-1,5M

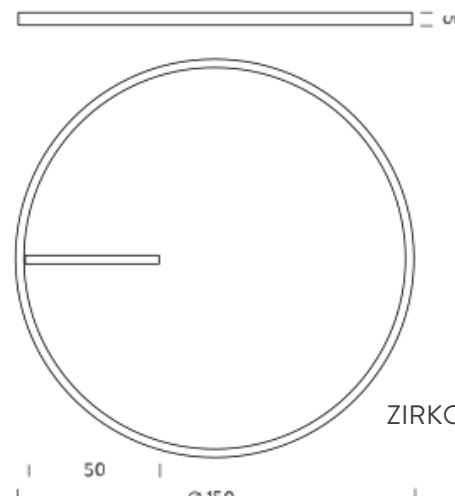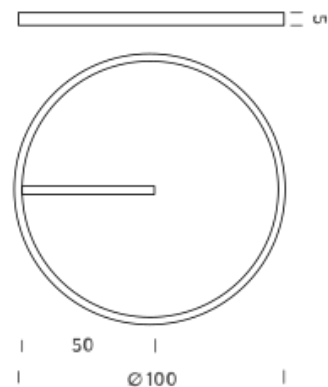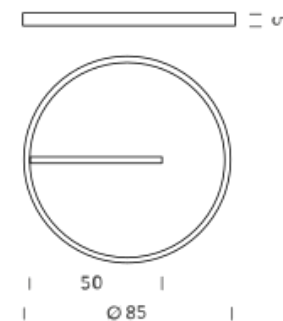

Ø 0,85M | 4000K

## LAMPING

Source	Linear LED
Total power	35W
Emission	Diffused
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	2360lm
Typ CRI	90
Energy class	D
IP class	40
Dimensions	ø 0,85m x 5cm
Materials	Aluminium
Notes	driver box with 1 x driver Superslim   RAL 9005 black   RAL 9016 white   shipped assembled
Customization options	Lumen output, finish

## Codes

BZRCD408G15NBO  
BZRCD408G15NNE  
BZRCD408G15NOR




## Structure

white  
black  
matte gold

## Certificazioni



## ZIRKOL CEILING 0,85-1-1,5M

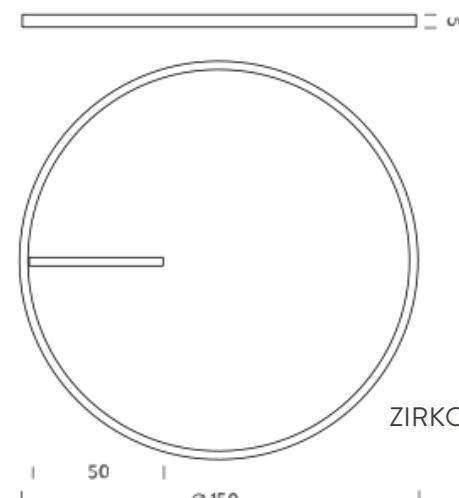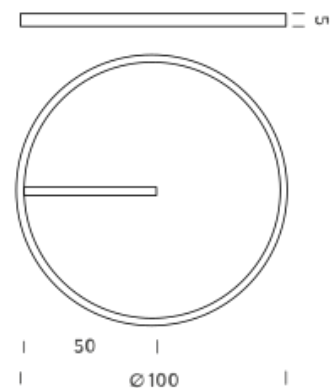

Ø 1M | 2700K

## LAMPING

Source	Linear LED
Total power	45W
Emission	Diffused
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	2616lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	ø 1m x 5cm
Materials	Aluminium
Notes	driver box with 1 x driver Superslim   RAL 9005 black   RAL 9016 white   shipped assembled

## Customization options

Lumen output, finish

## Codes

BZRCD410G15DBO  
BZRCD410G15DNE  
BZRCD410G15DOR




## Structure

white  
black  
matte gold

## Certificazioni



## ZIRKOL CEILING 0,85-1-1,5M

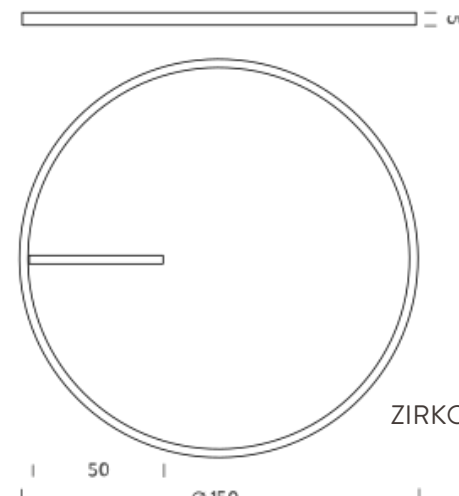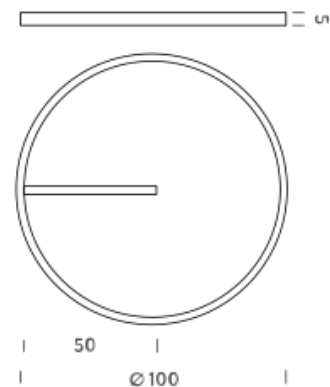

Ø 1M | 3000K

## LAMPING

Source	Linear LED
Total power	45W
Emission	Diffused
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	2769lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	ø 1m x 5cm
Materials	Aluminimu
Notes	driver box with 1 x driver Superslim   RAL 9005 black   RAL 9016 white   shipped assembled

## Customization options

Lumen output, finish

## Codes

BZRCD410G15WBO  
BZRCD410G15WNE  
BZRCD410G15WOR




## Structure

white  
black  
matte gold

## Certificazioni



## ZIRKOL CEILING 0,85-1-1,5M

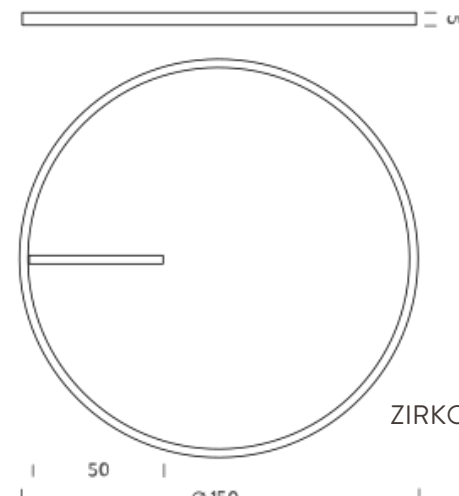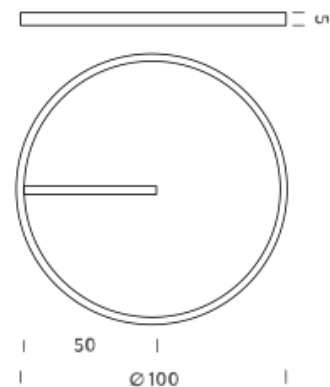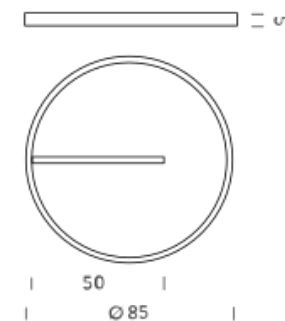

Ø 1M | 4000K

## LAMPING

Source	Linear LED
Total power	45W
Emission	Diffused
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	3077lm
Typ CRI	90
Energy class	D
IP class	40
Dimensions	ø 1m x 5cm
Materials	Aluminium
Notes	driver box with 1 x driver Superslim   RAL 9005 black   RAL 9016 white   shipped assembled

## Customization options

### Codes

BZRCD410G15NBO  
BZRCD410G15NNE  
BZRCD410G15NOR



### Structure

white  
black  
matte gold

### Certificazioni



## ZIRKOL CEILING 0,85-1-1,5M

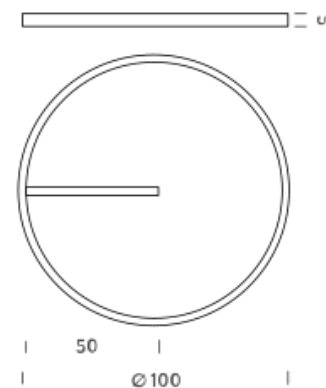

Ø 1,5M | 2700K

## LAMPING

Source	Linear LED
Total power	68W
Emission	Diffused
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	3923lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	ø 1,5m x 5cm
Materials	Aluminium
Notes	driver box with 1 x driver Superslim   RAL 9005 black   RAL 9016 white   shipped assembled
Customization options	Lumen output, finish

## Codes

BZRCD415G15DBO  
BZRCD415G15DNE  
BZRCD415G15DOR




## Structure

white  
black  
matte gold

## Certificazioni



## ZIRKOL CEILING 0,85-1-1,5M

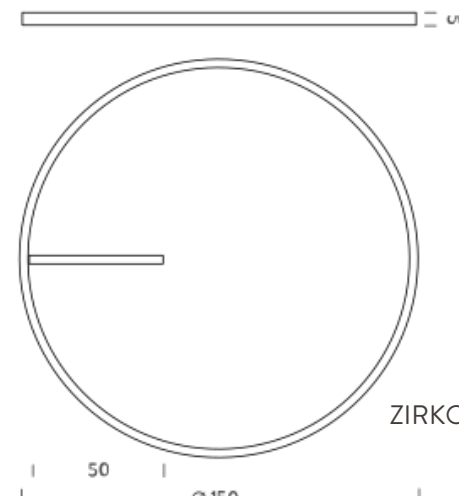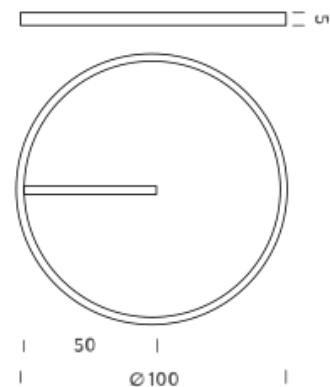



Ø 1,5M | 3000K

## LAMPING

Source	Linear LED
Total power	68W
Emission	Diffused
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	4154lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	ø 1,5m x 5cm
Materials	Aluminium
Notes	driver box with 1 x driver Superslim   RAL 9005 black   RAL 9016 white   shipped assembled

## Customization options

Lumen output, finish

## Codes

BZRCD415G15WBO  
BZRCD415G15WNE  
BZRCD415G15WOR




## Structure

white  
black  
matte gold

## Certificazioni



## ZIRKOL CEILING 0,85-1-1,5M

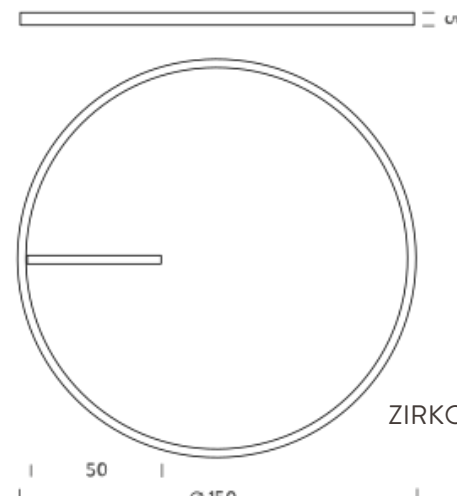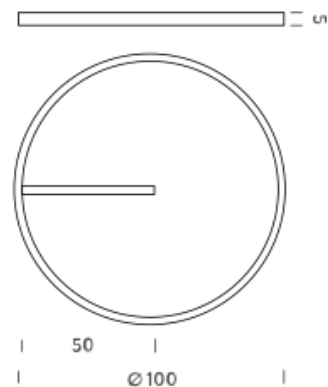

Ø 1,5M | 4000K

## LAMPING

Source	Linear LED
Total power	68W
Emission	Diffused
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	4616lm
Typ CRI	90
Energy class	D
IP class	40
Dimensions	ø 1,5m x 5cm
Materials	Aluminium
Notes	driver box with 1 x driver Superslim   RAL 9005 black   RAL 9016 white   shipped assembled

## Customization options

Lumen output, finish

## Codes

BZRCD415G15NBO  
BZRCD415G15NNE  
BZRCD415G15NOR

## Structure

white  
black  
matte gold

## Certificazioni



## ZIRKOL CEILING 0,85-1-1,5M

