

LUX CEILING TRIM

Die Lux-Kollektion umfasst eine Auswahl an kleinen, leistungsstarken Strahlern für die Innen- und Außenbeleuchtung. Lux Ceiling ist die perfekte Lösung für eine Downlight-Anwendung im Außenbereich. Er kann in Gipskarton- oder Holzdecken eingebaut werden und sorgt für eine direkte und homogene Beleuchtung. Die Strahler der Lux-Kollektion werden in verschiedenen Ausführungen und mit zwei Optiken angeboten, die für einen konzentrierteren oder breiteren Lichtausstrahlwinkel erhältlich sind. 1,2W und 12W



CEILING 12W | 2700° - 14°

LAMPING

Source	LED
Total power	12W
Emission	14°
Switching	according to driver
Tension	350mA
Color temperature	2700K
Luminous flux	1040lm
Initial luminaire efficacy	87lm/W
Initial chromaticity	SDCM<3
Typ CRI	>90
Energy class	F
IP class	65
Dimensions	Ø12,4x8,8
Materials	Aluminium
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	UGR<19
Net lamp weight	0,81 kg

Codes

BLUC0201N43DAA
BLUC0201N43DAN

Structure

grey
black


PACKAGE

Package 01 Dimension: 23,5x15x11 cm / Gross weight: 1,18 kg

Certificazioni



LUX CEILING TRIM 12W

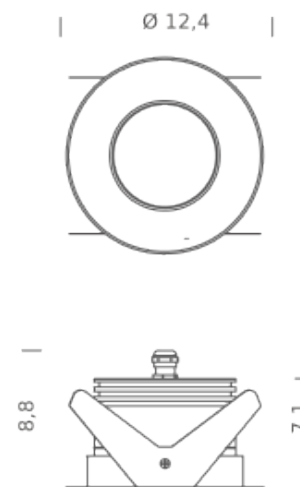

LUX CEILING TRIM 1,2



CEILING 12W | 2700° - 53°

LAMPING

Source	LED
Total power	12W
Emission	53°
Switching	according to driver
Tension	350mA
Color temperature	2700K
Luminous flux	900lm
Initial luminaire efficacy	75lm/W
Initial chromaticity	SDCM<3
Typ CRI	>90
Energy class	F
IP class	65
Dimensions	Ø12,4x8,8
Materials	Aluminium
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	UGR<19
Net lamp weight	0,81 kg

Codes

BLUC0201H43DAA
BLUC0201H43DAN

Structure

grey
black


PACKAGE

Package 01 Dimension: 23,5x15x11 cm / Gross weight: 1,18 kg

Certificazioni



LUX CEILING TRIM 12W

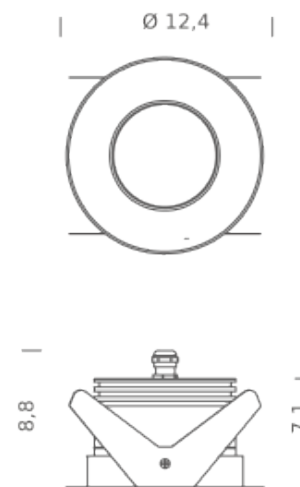

LUX CEILING TRIM 1,2



CEILING 12W | 3000° - 14°

LAMPING

Source	LED
Total power	12W
Emission	14°
Switching	according to driver
Tension	350mA
Color temperature	3000K
Luminous flux	1100lm
Initial luminaire efficacy	92lm/W
Initial chromaticity	SDCM<3
Typ CRI	>90
Energy class	F
IP class	65
Dimensions	Ø12,4x8,8
Materials	Aluminium
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	UGR<19
Net lamp weight	0,81 kg

Codes

BLUC0201N43WAA
BLUC0201N43WAN

Structure

grey
black


PACKAGE

Package 01 Dimension: 23,5x15x11 cm / Gross weight: 1,18 kg

Certificazioni



LUX CEILING TRIM 12W

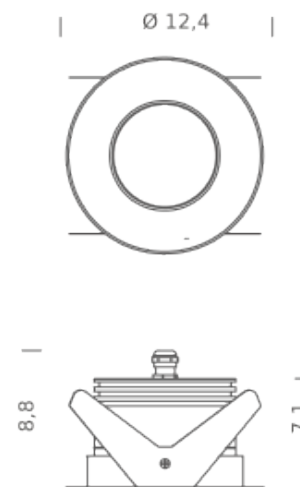

LUX CEILING TRIM 1,2



CEILING 12W | 3000° - 53°

LAMPING

Total power	12W
Emission	53°
Switching	according to driver
Tension	350mA
Color temperature	3000K
Luminous flux	950lm
Initial luminaire efficacy	80lm/W
Initial chromaticity	SDCM<3
Typ CRI	>90
Energy class	F
IP class	65
Dimensions	Ø12,4x8,8
Materials	Aluminium
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	UGR<19
Net lamp weight	0,81 kg

Codes

BLUC0201H43WAA
BLUC0201H43WAN

Structure

grey
black


PACKAGE

Package 01 Dimension: 23,5x15x11 cm / Gross weight: 1,18 kg

Certificazioni



LUX CEILING TRIM 12W

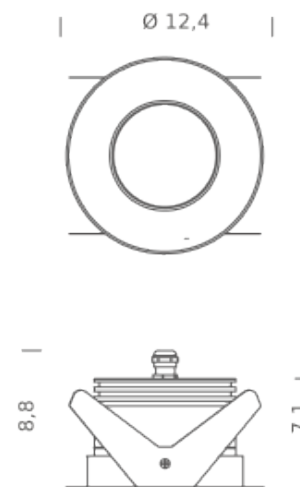

LUX CEILING TRIM 1,2



CEILING 12W | 4000° - 14°

LAMPING

Source	LED
Total power	12W
Emission	14°
Switching	according to driver
Tension	350mA
Color temperature	4000K
Luminous flux	1200lm
Initial luminaire efficacy	100lm/W
Initial chromaticity	SDCM<3
Typ CRI	>90
Energy class	F
IP class	65
Dimensions	Ø12,4x8,8
Materials	Aluminium
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	UGR<19
Net lamp weight	0,81 kg

Codes

BLUC0201N43NAA
BLUC0201N43NAN

Structure

grey
black


PACKAGE

Package 01 Dimension: 23,5x15x11 cm / Gross weight: 1,18 kg

Certificazioni



LUX CEILING TRIM 12W

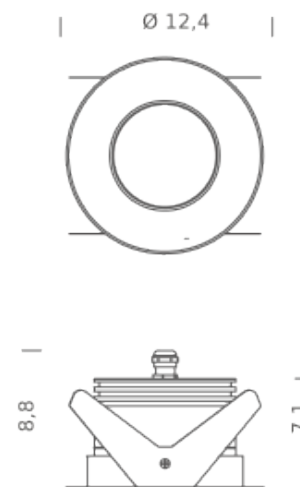

LUX CEILING TRIM 1,2



CEILING 12W | 4000° - 53°

LAMPING

Source	LED
Total power	12W
Emission	53°
Switching	according to driver
Tension	350mA
Color temperature	4000K
Luminous flux	1050lm
Initial luminaire efficacy	88lm/W
Initial chromaticity	SDCM<3
Typ CRI	>90
Energy class	F
IP class	65
Dimensions	Ø12,4x8,8
Materials	Aluminium
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	UGR<19
Net lamp weight	0,81 kg

Codes

BLUC0201H43NAA
BLUC0201H43NAN

Structure

grey
black


PACKAGE

Package 01 Dimension: 23,5x15x11 cm / Gross weight: 1,18 kg

Certificazioni



LUX CEILING TRIM 12W

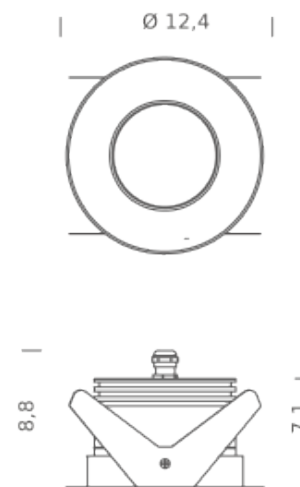

LUX CEILING TRIM 1,2



CEILING 1,2W | 3000K - 11°

LAMPING

Source	LED
Total power	1.2W
Emission	11°
Switching	according to driver
Tension	350mA
Color temperature	3000K
Initial chromaticity	SDCM<3
Typ CRI	>90
Energy class	G
IP class	65
Dimensions	ø44x55mm
Materials	Aluminium
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C

Codes

BLUC0201F17WAA
BLUC0201F17WAN


Structure

grey
black

Certificazioni



LUX CEILING TRIM 12W

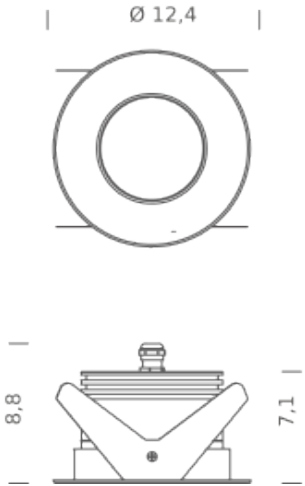

LUX CEILING TRIM 1,2



CEILING 1,2W | 3000K - 25°

LAMPING

Source	LED
Total power	1.2W
Emission	25°
Switching	according to driver
Tension	350mA
Color temperature	3000K
Luminous flux	68lm
Initial chromaticity	SDCM<3
Typ CRI	>90
Energy class	G
IP class	65
Dimensions	ø44x55mm
Materials	Aluminium
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C

Codes

BLUC0201417WAA
BLUC0201417WAN


Structure

grey
black

Certificazioni



LUX CEILING TRIM 12W

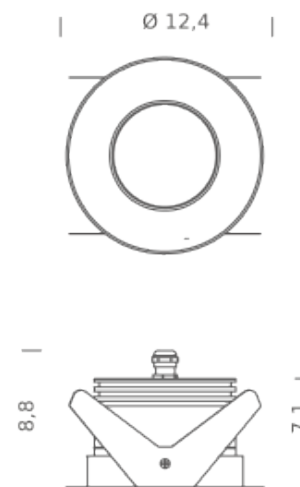

LUX CEILING TRIM 1,2



CEILING 1,2W | 4000K - 11°

LAMPING

Source	LED
Total power	1.2W
Emission	11°
Switching	according to driver
Tension	350mA
Color temperature	4000K
Initial chromaticity	SDCM<3
Typ CRI	>80
Energy class	G
IP class	65
Dimensions	ø44x55mm
Materials	Aluminium
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C

Codes

BLUC0201F17NAA
BLUC0201F17NAN


Structure

grey
black

Certificazioni



LUX CEILING TRIM 12W

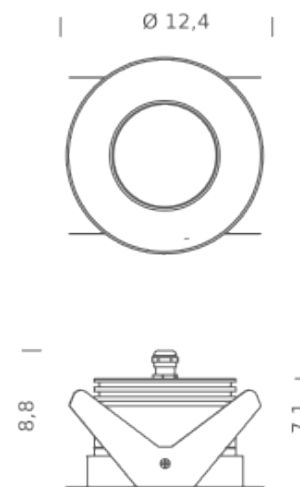

LUX CEILING TRIM 1,2



CEILING 1,2W | 4000K - 25°

LAMPING

Source	LED
Total power	1.2W
Emission	25°
Switching	according to driver
Tension	350mA
Color temperature	4000K
Initial chromaticity	SDCM<3
Typ CRI	>80
Energy class	G
IP class	65
Dimensions	ø44x55mm
Materials	Aluminium
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C

Codes

BLUC0201417NAA
BLUC0201417NAN


Structure

grey
black

Certificazioni



LUX CEILING TRIM 12W

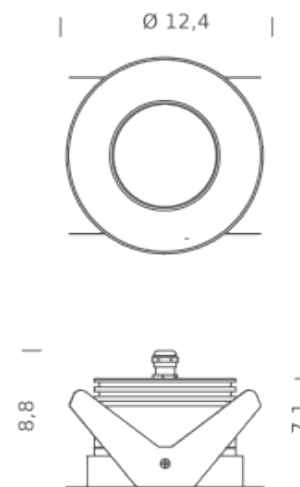

LUX CEILING TRIM 1,2

