

MINIFLUX LINEA TRANSPARENT

Miniflux Linea Transparent ist ein LED-Pendelsystem für die Innenbeleuchtung. Der Körper besteht aus einem Aluminiumprofil, das mit einem Hochleistungs LED-Stripe CRI>97, 24V DC bestückt ist und einem Transparenter Polycarbonat-Diffusor. Erhältlich in schwarzer, weißer und goldener Ausführung. Miniflux ist in zwei Farbtemperaturen und in TRIAC- und DALI-Versionen erhältlich. Vorschaltgerät im Lieferumfang enthalten.



LAMPING

Source	Linear LED
Total power	15W
Emission	Direct 120°
Switching	TRIAC
Tension	24VDC
Color temperature	2700K
Initial chromaticity	SDCM<2
Typ CRI	>97
Energy class	F
IP class	40
Dimensions	Ø20 x 1060mm
Materials	Polycarbonate
Ambient temperature range	-20°C / 50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	Driver included
Customization options	CCT 4000K on request
Net lamp weight	0.6 kg


Codes

BMLT2710G26DAN
BMLT2710G26DBO
BMLT2710G26DAO

Structure

black
white
gold

Certificazioni

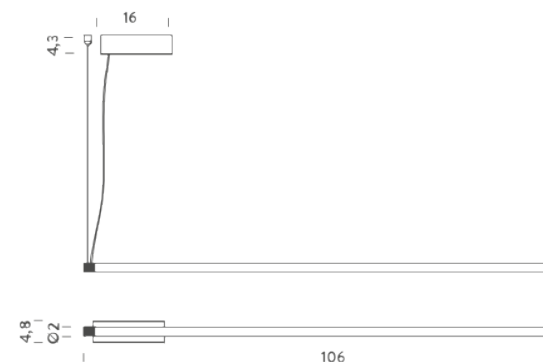

TRIAC | 3000K

MINIFLUX LINEA TRANSPARENT

LAMPING

Source	Linear LED
Total power	15W
Emission	Direct 120°
Switching	TRIAC
Tension	24VDC
Color temperature	3000K
Luminous flux	897lm
Initial luminaire efficacy	60m/W
Initial chromaticity	SDCM<2
Typ CRI	>97
Energy class	F
IP class	40
Dimensions	Ø20 x 1060mm
Materials	Polycarbonate
Ambient temperature range	-20°C / 50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	Driver included
Customization options	CCT 4000K on request

Codes

BMLT2710G26WAN
BMLT2710G26WBO
BMLT2710G26WAO


Structure

black
white
gold

PACKAGE

Package 01 Net weight: 0.6 kg

Certificazioni

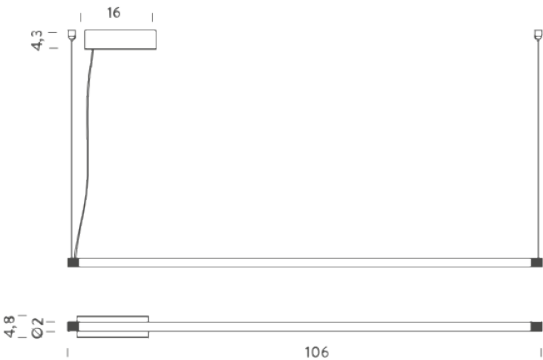

LAMPING

Source	Linear LED
Total power	15W
Emission	Direct 120°
Switching	DALI
Tension	24VDC
Color temperature	2700K
Initial chromaticity	SDCM<2
Typ CRI	>97
Energy class	F
IP class	40
Dimensions	Ø20 x 1060mm
Materials	Polycarbonate
Ambient temperature range	-20°C / 50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	Driver included
Customization options	CCT 4000K on request
Net lamp weight	0.6 kg


Codes

BMLT1610G26DAN
BMLT1610G26DBO
BMLT1610G26DAO

Structure

black
white
gold

Certificazioni

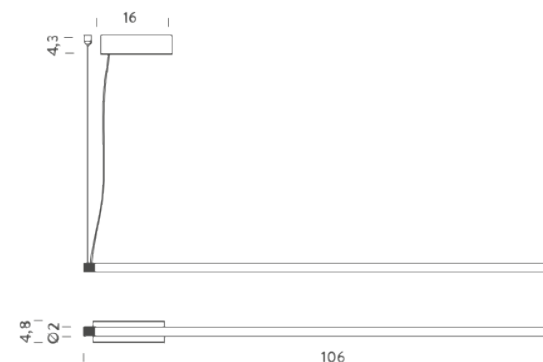

LAMPING

Source	Linear LED
Total power	15W
Emission	Direct 120°
Switching	DALI
Tension	24VDC
Color temperature	3000K
Luminous flux	897lm
Initial luminaire efficacy	60m/W
Initial chromaticity	SDCM<2
Typ CRI	>97
Energy class	F
IP class	40
Dimensions	Ø20 x 1060mm
Materials	Polycarbonate
Ambient temperature range	-20°C / 50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	Driver included
Customization options	CCT 4000K on request
Net lamp weight	0.6 kg

Codes

BMLT1610G26WAN
BMLT1610G26WBO
BMLT1610G26WAO

Structure

black
white
gold

Certificazioni

