


ELLISSE PENDANT MEGA

Federico Palazzari

Realised in various versions through an innovative technology developed by Nemo for coupling extrusions, Ellisse guarantees diffused direct and indirect lighting with the LED housed within the structure while remaining unobtrusive. The design is linear and contemporary, while an elegant black marble base becomes a pedestal for the floor version.

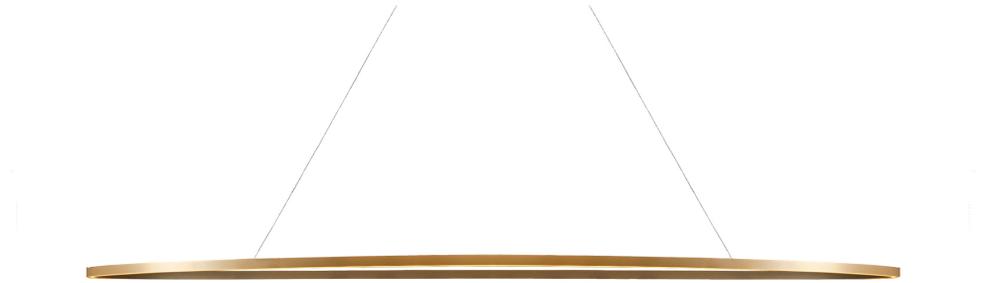

DOWNLIGHT 2700K

LAMPING

Source	linear LED
Total power	76W
Emission	diffused
Switching	dimnable, DALI push
Tension	110-240V
Color temperature	2700K
Luminous flux	4425lm
Typ CRI	85
IP class	20
Materials	Aluminium
Notes	adjustable cable length from 2,5m to 0,4m, white RAL 9003, black RAL 9005, TRIAC VERSION on request (+200€), 1-10V version on request (+120€), CASAMBI version on request (+225€)

Codes

ELP LW2 59
ELP LN2 59
ELP LO2 59

Structure


white
black
gold painted

PACKAGE

Package 01

Dimension: 14x101x201 cm / Gross weight: 7,5 kg

Certificazioni

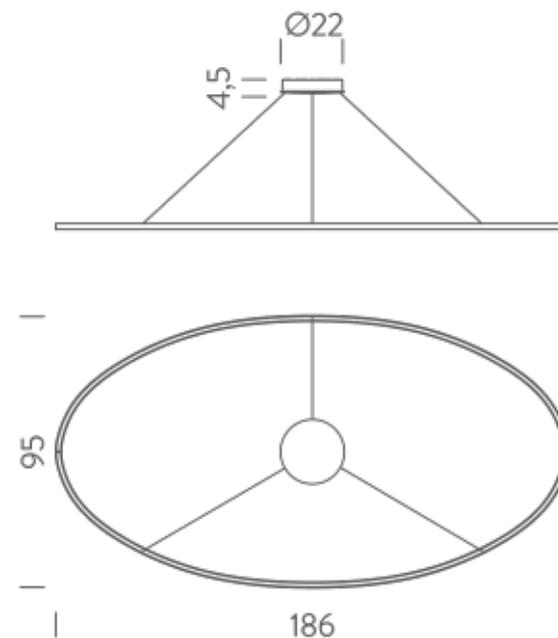

DOWNLIGHT 3000K

LAMPING

Source	linear LED
Total power	76W
Emission	diffused
Switching	dimnable, DALI push
Tension	110-240V
Color temperature	3000K
Luminous flux	4425lm
Typ CRI	85
IP class	20
Materials	Aluminium
Notes	adjustable cable length from 2,5m to 0,4m, white RAL 9003, black RAL 9005, TRIAC VERSION on request (+200€), 1-10V version on request (+120€), CASAMBI version on request (+225€)

Codes

ELP LWW 59
ELP LNW 59
ELP LOW 59

Structure


white
black
gold painted

PACKAGE

Package 01

Dimension: 14x101x201 cm / Gross weight: 7,5 kg

Certificazioni

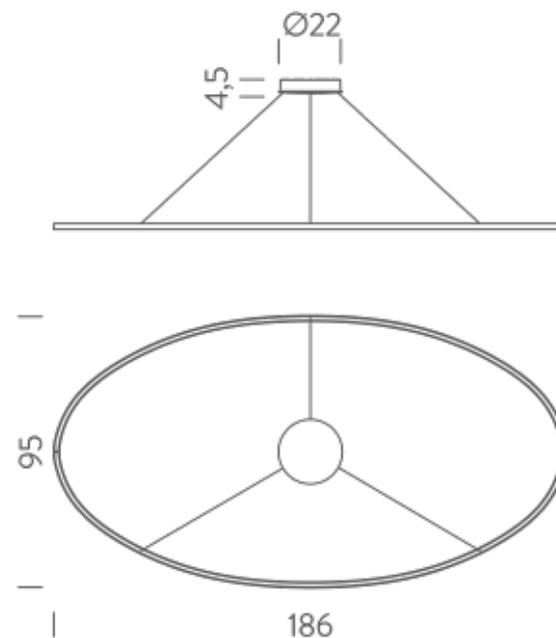

UPLIGHT 2700K

LAMPING

Source	linear LED
Total power	76W
Emission	diffused
Switching	dimnable, DALI push
Tension	110-240V
Color temperature	2700K
Luminous flux	4425lm
Typ CRI	85
IP class	20
Materials	Aluminium
Notes	adjustable cable length from 2,5m to 0,4m, white RAL 9003, black RAL 9005, TRIAC VERSION on request (+200€), 1-10V version on request (+120€), CASAMBI version on request (+225€)

Codes

ELP LW2 58
ELP LN2 58
ELP LO2 58


Structure

white
black
gold painted

PACKAGE

Package 01 Dimension: 14x101x201 cm / Gross weight: 7,5 kg

Certificazioni

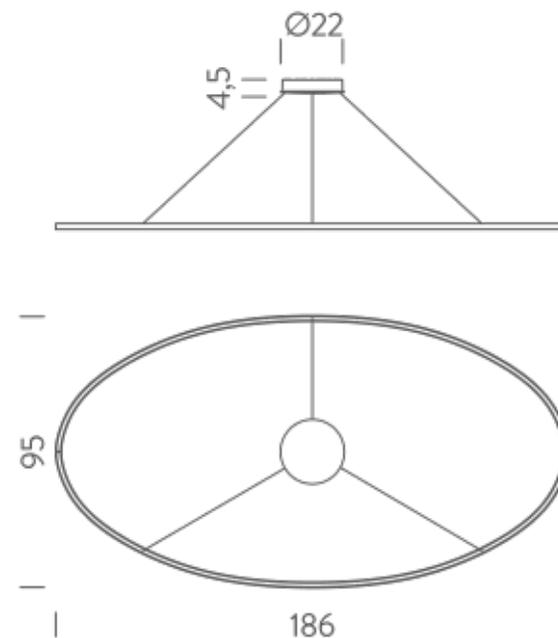

UPLIGHT 3000K

LAMPING

Source	linear LED
Total power	76W
Emission	diffused
Switching	dimnable, DALI push
Tension	110-240V
Color temperature	3000K
Luminous flux	4425lm
Typ CRI	85
IP class	20
Materials	Aluminium
Notes	adjustable cable length from 2,5m to 0,4m, white RAL 9003, black RAL 9005, TRIAC VERSION on request (+200€), 1-10V version on request (+120€), CASAMBI version on request (+225€)

Codes

ELP LWW 58
ELP LNW 58
ELP LOW 58

Structure

white
black
gold painted

PACKAGE

Package 01 Dimension: 14x101x201 cm / Gross weight: 7,5 kg

Certificazioni

