
# DABLIU

Suspension lamp in aluminum, composed of a slender structure with three light points and diffusers that can be selected according to different versions. Spot version available for punctual lighting, version with spherical diffuser in opal blown glass and version with a metallic cone in burnished gold and black finish that allows more light diffusion.

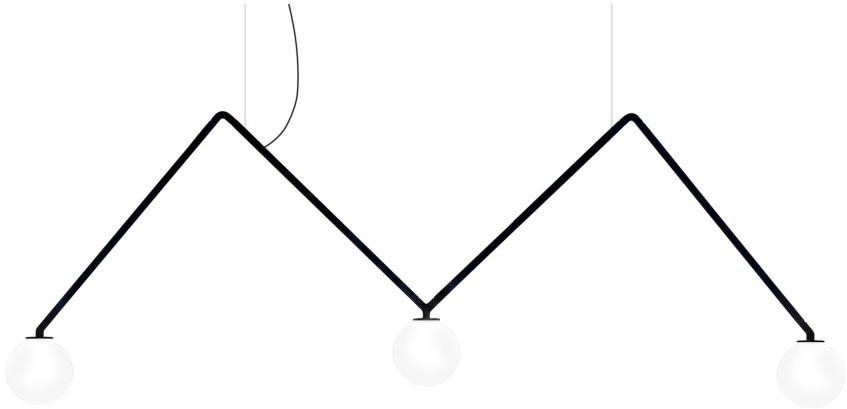

# SPOT | 2700K

## LAMPING

| | |
|---|---|
| **Source** | LED spot |
| **Total power** | 3x5W |
| **Emission** | direct |
| **Switching** | dimmable 1-10V |
| **Tension** | 110-240V |
| **Color temperature** | 2700K |
| **Luminous flux** | 3x395lm |
| **Typ CRI** | 90 |
| **Energy class** | A+ |
| **IP class** | 20 |
| **Dimensions** | Ø4,5x8cm |
| **Materials** | aluminum + PC + ABS |
| **Notes** | cable length 3m, 40° optic |


| *Codes* | *Structure/Diffuser* |
|---|---|
| **DAB LNN 51** | black/black |

## PACKAGE

| | |
|---|---|
| **Package 01** | Dimension: 15x80x150 cm |

*Certificazioni*



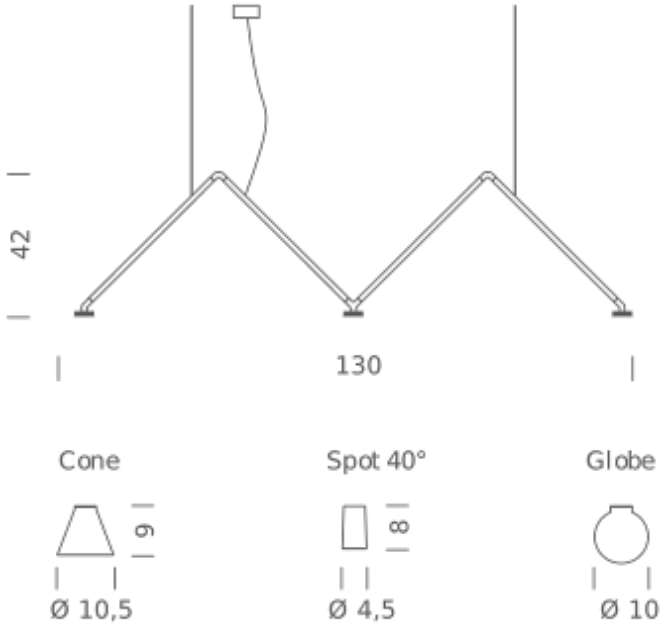

# SPOT | 3000K


**LAMPING**

| | |
|---|---|
| **Source** | LED spot |
| **Total power** | 3x5W |
| **Emission** | direct |
| **Switching** | dimmable 1-10V |
| **Tension** | 110-240V |
| **Color temperature** | 3000K |
| **Luminous flux** | 3x395lm |
| **Typ CRI** | 90 |
| **IP class** | 20 |
| **Dimensions** | Ø4,5x8cm |
| **Materials** | aluminum + PC + ABS |
| **Notes** | cable length 3m, 40° optic |

*Codes*
**DAB LNN 52**

*Structure/Diffuser*
black/black

*Certificazioni*

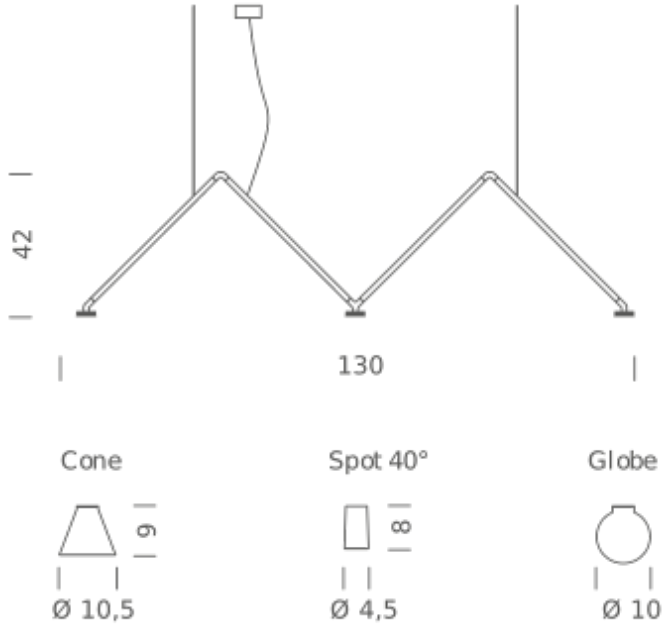

# GLOBE | 2700K


**LAMPING**

| | |
|---|---|
| **Source** | G4 LED 12V |
| **Total power** | 3x4W |
| **Emission** | diffused |
| **Switching** | dimmable 1-10V |
| **Tension** | 110-240V |
| **Color temperature** | 2700K |
| **Luminous flux** | 3x350lm |
| **Typ CRI** | 90 |
| **IP class** | 20 |
| **Dimensions** | Ø10cm |
| **Materials** | aluminum + PC + ABS |
| **Notes** | cable length 3m, G4 LED bulb included |

*Codes*
**DAB LNN 53**

*Structure/Diffuser*
black/white

*Certificazioni*

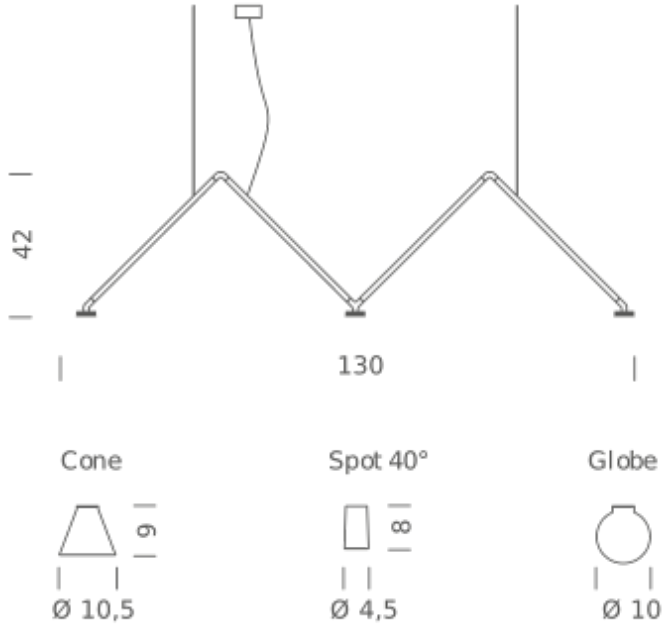

# GLOBE | 3000K


**LAMPING**

| | |
|---|---|
| **Source** | G4 LED 12V |
| **Total power** | 3x4W |
| **Emission** | diffused |
| **Switching** | dimmable 1-10V |
| **Tension** | 110-240V |
| **Color temperature** | 3000K |
| **Luminous flux** | 3x350lm |
| **Typ CRI** | 90 |
| **Dimensions** | Ø10cm |
| **Materials** | aluminum + PC + ABS |
| **Notes** | cable length 3m, G4 LED bulb included |

*Codes*
**DAB LNN 54**

*Structure/Diffuser*
black/white

*Certificazioni*

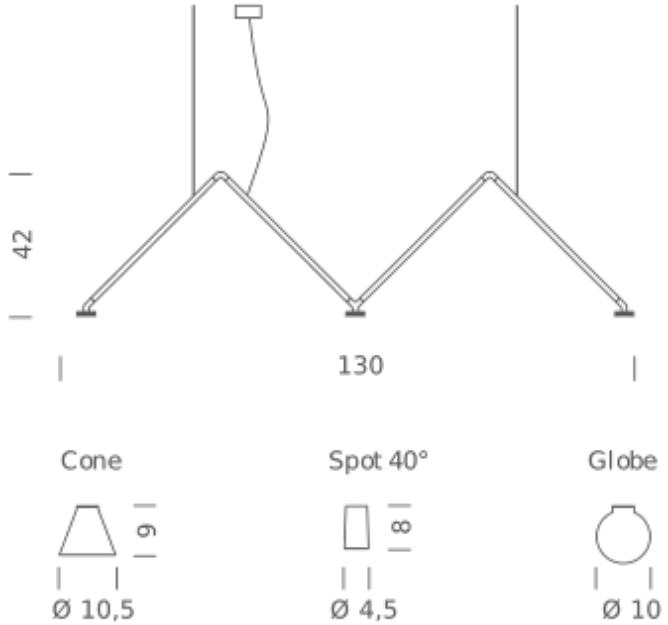

# CONE | 2700K


**LAMPING**

| | |
|---|---|
| **Source** | LED spot |
| **Total power** | 3x5W |
| **Emission** | direct |
| **Switching** | dimmable 1-10V |
| **Tension** | 110-240V |
| **Color temperature** | 2700K |
| **Luminous flux** | 3x395lm |
| **Typ CRI** | 90 |
| **IP class** | 20 |
| **Dimensions** | Ø10,5x9cm |
| **Materials** | aluminum + PC + ABS + glass |
| **Notes** | cable length 3m, 40° optic |

*Codes*
**DAB LNN 55**

*Structure/Diffuser*
black/gold burnished

*Certificazioni*

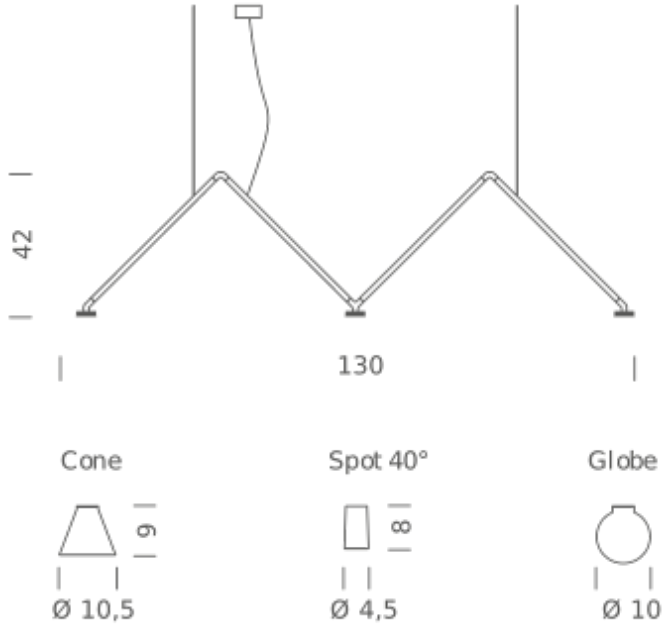

# CONE | 3000K

**LAMPING**

| | |
|---|---|
| **Source** | LED spot |
| **Total power** | 3x5W |
| **Emission** | direct |
| **Switching** | dimmable 1-10V |
| **Tension** | 110-240V |
| **Color temperature** | 3000K |
| **Luminous flux** | 3x395lm |
| **Typ CRI** | 90 |
| **IP class** | 20 |
| **Dimensions** | Ø10,5x9cm |
| **Materials** | aluminum + PC + ABS + glass |
| **Notes** | cable length 3m, 40° optic |

*Codes*
**DAB LNN 56**

*Structure/Diffuser*
black/gold burnished

*Certificazioni*

