

MINIFLUX TRANSPARENT

MINIFLUX is a modular LED system for indoor / outdoor suitable for cornice, decorative and accent lighting.

High-emission LED strip (24V DC) installed in an aluminium profile.

Clear polycarbonate diffuser.

Installation is realised through transparent polycarbonate clips that are adjusted for the customer's needs.

Miniflux can be supplied in numerous lengths and colour temperatures.

Tube diameter dimensions depend on the lamp's luminous flux.

LED driver not included.



1M | 2700K HP

LAMPING

Source	Linear LED
Total power	14,5W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	2700K
Luminous flux	1500lm
Initial luminaire efficacy	>100lm/W
Initial chromaticity	SDCM < 2
Typ CRI	90
Energy class	E
IP class	65
Dimensions	ø1,6x104cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,25 kg

Codes

BBOK0910041DPC

Structure

transparent

PACKAGE

Package 01 Dimension: 120x8,5x4 cm / Gross weight: 0,35 kg


Certificazioni



HP - 120°/ASYMMETRIC



HP PLUS

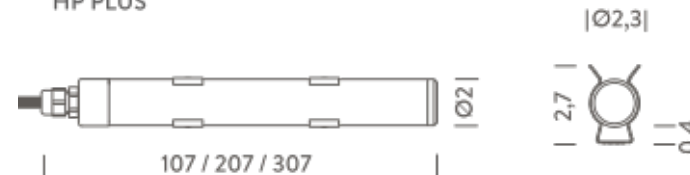

1M | 3000K HP

LAMPING

Source	Linear LED
Total power	14,5W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1600lm
Initial luminaire efficacy	>100lm/W
Initial chromaticity	SDCM < 2
Typ CRI	90
Energy class	E
IP class	65
Dimensions	ø1,6x104cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,25 kg

Codes

BBOK0910041WPC

Structure

transparent

PACKAGE

Package 01 Dimension: 120x8,5x4 cm / Gross weight: 0,35 kg


Certificazioni



HP - 120°/ASYMMETRIC



HP PLUS

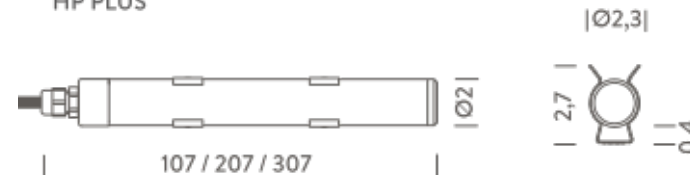

1M | 4000K HP

LAMPING

Source	Linear LED
Total power	14,5W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1880lm
Initial luminaire efficacy	>100lm/W
Initial chromaticity	SDCM < 2
Typ CRI	90
Energy class	D
IP class	65
Dimensions	ø1,6x104cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,25 kg

Codes

BBOK0910041NPC


Structure

transparent

PACKAGE

Package 01 Dimension: 120x8,5x4 cm / Gross weight: 0,35 kg

Certificazioni

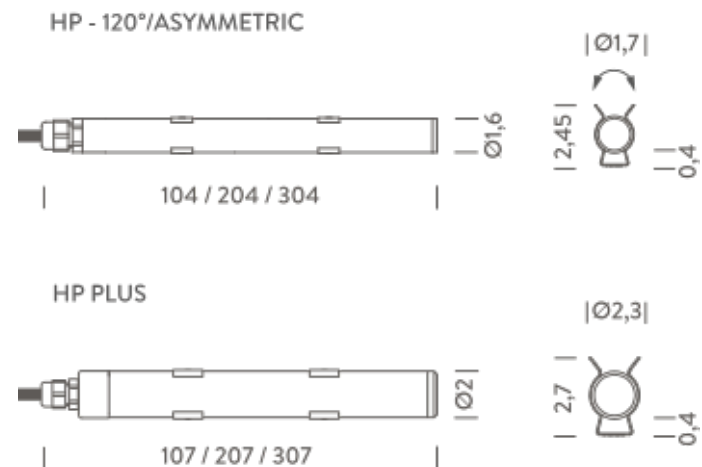

1M | 2700K HP - ASYMMETRIC

LAMPING

Source	LED linear
Total power	14,5W
Emission	Direct asymmetric
Switching	according to driver
Tension	24VDC
Color temperature	2700K
Luminous flux	1360lm
Initial luminaire efficacy	> 90lm/W
Initial chromaticity	SDCM < 2
Typ CRI	90
Energy class	E
IP class	65
Dimensions	ø1,6x104cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,25 kg

Codes

BBOK0910241DPC


Structure

transparent

PACKAGE

Package 01 Dimension: 120x8,5x4 cm / Gross weight: 0,35 kg

Certificazioni

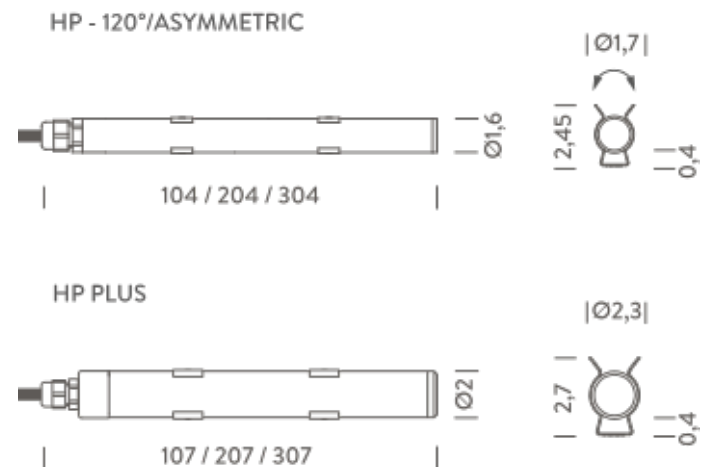

1M | 3000K HP - ASYMMETRIC

LAMPING

Source	Linear LED
Total power	14,5W
Emission	Direct asymmetric
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1430lm
Initial luminaire efficacy	> 90lm/W
Initial chromaticity	SDCM < 2
Typ CRI	90
Energy class	E
IP class	65
Dimensions	ø2x107cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,25 kg

Codes

BBOK0910241WPC

Structure

transparent

PACKAGE

Package 01

Dimension: 120x8,5x4 cm / Gross weight: 0,35 kg


Certificazioni



HP - 120°/ASYMMETRIC



HP PLUS

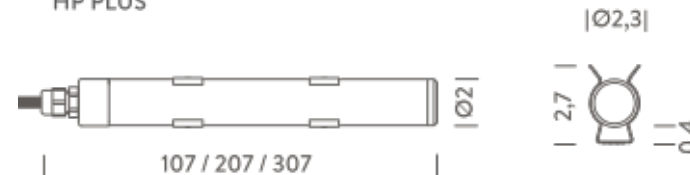

1M | 4000K HP - ASYMMETRIC

LAMPING

Source	Linear LED
Total power	14,5W
Emission	Direct asymmetric
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1660lm
Initial luminaire efficacy	> 90lm/W
Initial chromaticity	SDCM < 2
Typ CRI	90
Energy class	D
IP class	65
Dimensions	ø2x107cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,25 kg

Codes

BBOK0910241NPC

Structure

transparent

PACKAGE

Package 01 Dimension: 120x8,5x4 cm / Gross weight: 0,35 kg


Certificazioni



HP - 120°/ASYMMETRIC



HP PLUS

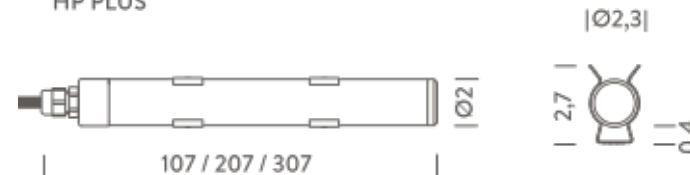

2M | 2700K HP

LAMPING

Source	Linear LED
Total power	29W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	2700K
Luminous flux	3000lm
Initial luminaire efficacy	>100lm/W
Initial chromaticity	SDCM < 2
Typ CRI	90
Energy class	E
IP class	65
Dimensions	ø1,6x204cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,5 kg

Codes

BBOK0920041DPC

Structure

transparent

PACKAGE


Package 01

Dimension: 220x8,5x4 cm / Gross weight: 0,62 kg


Certificazioni



HP - 120°/ASYMMETRIC

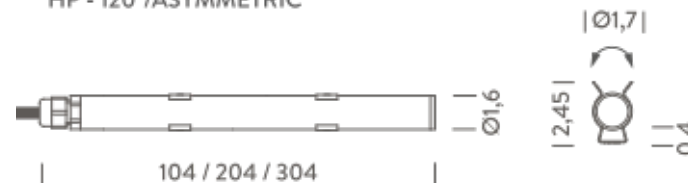

HP PLUS

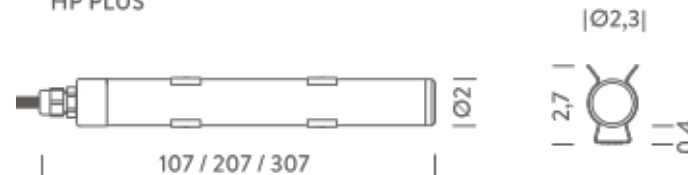

2M | 3000K HP

LAMPING

Source	Linear LED
Total power	29W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	3200lm
Initial luminaire efficacy	>100lm/W
Initial chromaticity	SDCM < 2
Typ CRI	90
Energy class	E
IP class	65
Dimensions	ø1,6x204cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,50 kg

Codes

BBOK0920041WPC

Structure

transparent

PACKAGE

Package 01

Dimension: 220x8,5x4 cm / Gross weight: 0,62 kg


Certificazioni



HP - 120°/ASYMMETRIC



HP PLUS

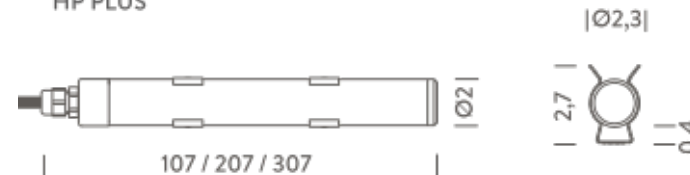

2M | 4000K HP

LAMPING

Source	Linear LED
Total power	29W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	3760lm
Initial luminaire efficacy	>100lm/W
Initial chromaticity	SDCM < 2
Typ CRI	90
Energy class	D
IP class	65
Dimensions	ø1,6x204cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,50 kg

Codes

BBOK0920041NPC

Structure


transparent

PACKAGE

Package 01

Dimension: 220x8,5x4 cm / Gross weight: 0,62 kg

Certificazioni

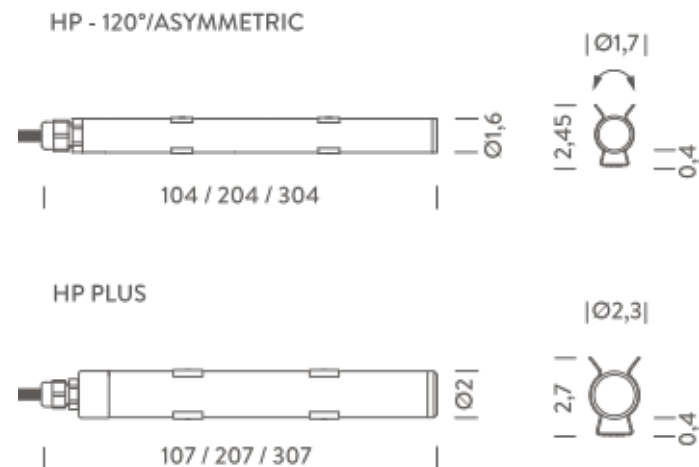

2M | 2700K HP - ASYMMETRIC

LAMPING

Source	LED linear
Total power	29W
Emission	Direct asymmetric
Switching	according to driver
Tension	24VDC
Color temperature	2700K
Luminous flux	2720lm
Initial luminaire efficacy	> 90lm/W
Initial chromaticity	SDCM < 2
Typ CRI	90
Energy class	E
IP class	65
Dimensions	ø2x207cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25° C
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	tube length, 1-10V, DALI, DMX, Casambi
Net lamp weight	0,50 kg

Codes

BBOK0920241DPC

Structure

transparent

PACKAGE

Package 01

Dimension: 220x8,5x4 cm / Gross weight: 0,62 kg


Certificazioni



HP - 120°/ASYMMETRIC



HP PLUS

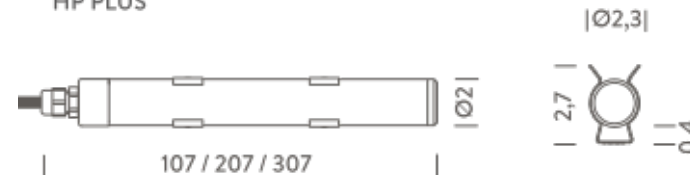

2M | 3000K HP - ASYMMETRIC

LAMPING

Source	Linear LED
Total power	29W
Emission	Direct asymmetric
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	2860lm
Initial luminaire efficacy	> 90lm/W
Initial chromaticity	SDCM < 2
Typ CRI	90
Energy class	E
IP class	65
Dimensions	ø2x207cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,50 kg

Codes

BBOK0920241WPC

Structure


transparent

PACKAGE

Package 01

Dimension: 220x8,5x4 cm / Gross weight: 0,62 kg

Certificazioni

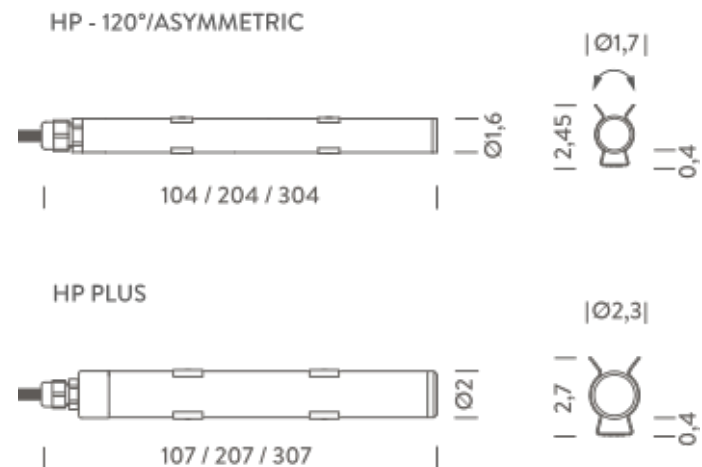

2M | 4000K HP - ASYMMETRIC

LAMPING

Source	Linear LED
Total power	29W
Emission	Direct asymmetric
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	3320lm
Initial luminaire efficacy	> 90lm/W
Initial chromaticity	SDCM < 2
Typ CRI	90
Energy class	D
IP class	65
Dimensions	ø2x207cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,50 kg

Codes

BBOK0920241NPC

Structure


transparent

PACKAGE

Package 01

Dimension: 220x8,5x4 cm / Gross weight: 0,62 kg

Certificazioni

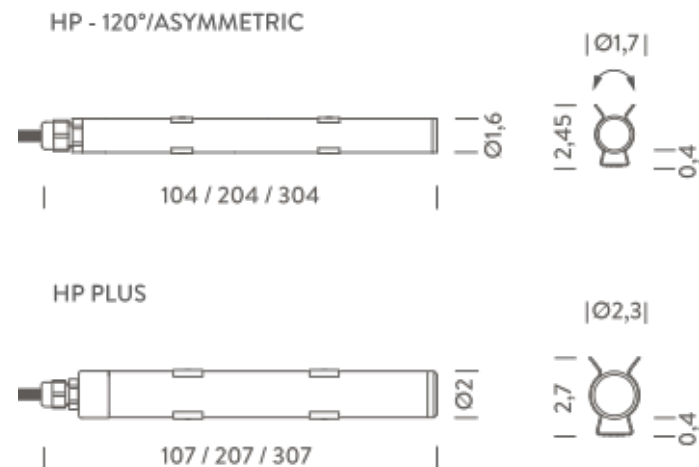

3M | 2700K HP

LAMPING

Source	Linear LED
Total power	42W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	2700K
Luminous flux	4500lm
Initial luminaire efficacy	>100lm/W
Initial chromaticity	SDCM < 2
Typ CRI	90
Energy class	E
IP class	65
Dimensions	ø1,6x304cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,75 kg

Codes

BBOK0930041DPC

Structure

transparent

PACKAGE

Package 01

Dimension: 320x8,5x4 cm / Gross weight: 0,95 kg


Certificazioni



HP - 120°/ASYMMETRIC



HP PLUS

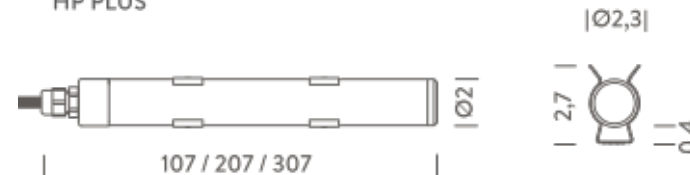

3M | 3000K HP

LAMPING

Source	Linear LED
Total power	42W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	4800lm
Initial luminaire efficacy	>100lm/W
Initial chromaticity	SDCM < 2
Typ CRI	90
Energy class	E
IP class	65
Dimensions	ø1,6x304cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,75 kg

Codes

BBOK0930041WPC

Structure

transparent

PACKAGE

Package 01

Dimension: 320x8,5x4 cm / Gross weight: 0,95 kg


Certificazioni



HP - 120°/ASYMMETRIC



HP PLUS

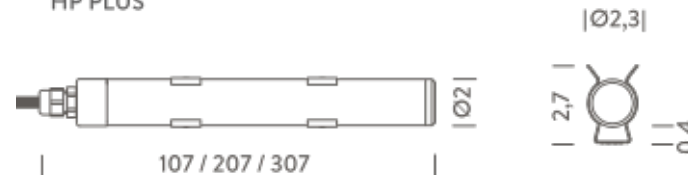

3M | 4000K HP

LAMPING

Source	Linear LED
Total power	42W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	5640lm
Initial luminaire efficacy	>100lm/W
Initial chromaticity	SDCM < 2
Typ CRI	90
Energy class	D
IP class	65
Dimensions	ø1,6x304cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,75 kg

Codes

BBOK0930041NPC

Structure

transparent

PACKAGE

Package 01

Dimension: 320x8,5x4 cm / Gross weight: 0,95 kg


Certificazioni



HP - 120°/ASYMMETRIC



HP PLUS

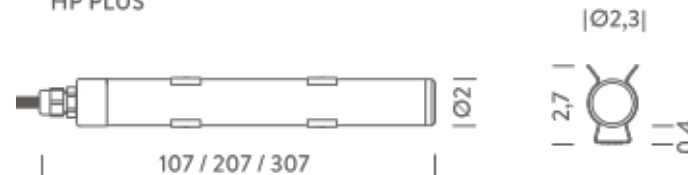

3M | 2700K HP - ASYMMETRIC

LAMPING

Source	LED linear
Total power	42W
Emission	Direct asymmetric
Switching	according to driver
Tension	24VDC
Color temperature	2700K
Luminous flux	4080lm
Initial luminaire efficacy	> 90lm/W
Initial chromaticity	SDCM < 2
Typ CRI	90
Energy class	E
IP class	65
Dimensions	ø2x307cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25° C
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	tube length, 1-10V, DALI, DMX, Casambi
Net lamp weight	0,75 kg

Codes

BBOK0930241DPC

Structure


transparent

PACKAGE


Package 01

Dimension: 320x8,5x4 cm / Gross weight: 0,95 kg


Certificazioni



HP - 120°/ASYMMETRIC

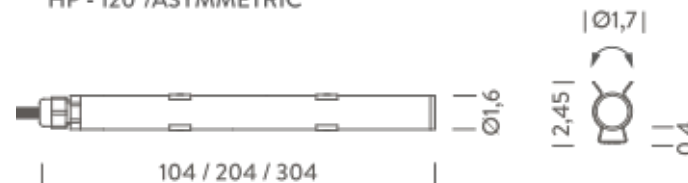

HP PLUS

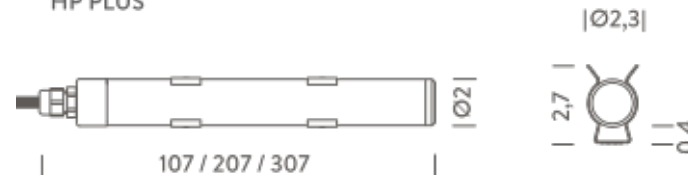

3M | 3000K HP - ASYMMETRIC

LAMPING

Source	Linear LED
Total power	42W
Emission	Direct asymmetric
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	4290lm
Initial luminaire efficacy	> 90lm/W
Initial chromaticity	SDCM < 2
Typ CRI	90
Energy class	E
IP class	65
Dimensions	ø2x307cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,75 kg

Codes

BBOK0930241WPC

Structure


transparent

PACKAGE

Package 01

Dimension: 320x8,5x4 cm / Gross weight: 0,95 kg

Certificazioni

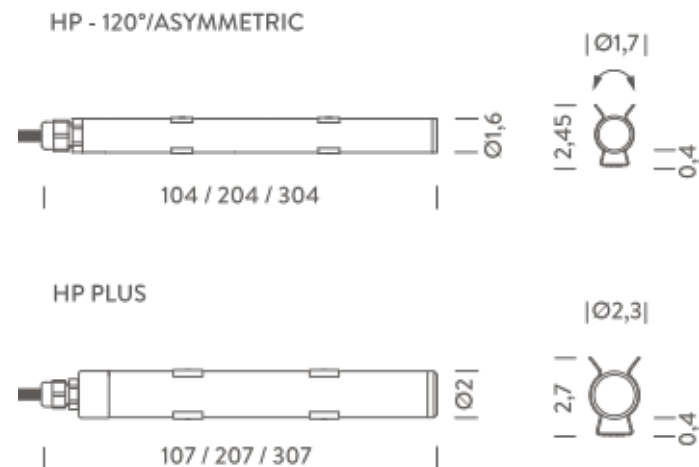

3M | 4000K HP - ASYMMETRIC

LAMPING

Source	Linear LED
Total power	42W
Emission	Direct asymmetric
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	4980lm
Initial luminaire efficacy	> 90lm/W
Initial chromaticity	SDCM < 2
Typ CRI	90
Energy class	D
IP class	65
Dimensions	ø2x307cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,75 kg

Codes

BBOK0930241NPC

Structure


transparent

PACKAGE

Package 01

Dimension: 320x8,5x4 cm / Gross weight: 0,95 kg

Certificazioni

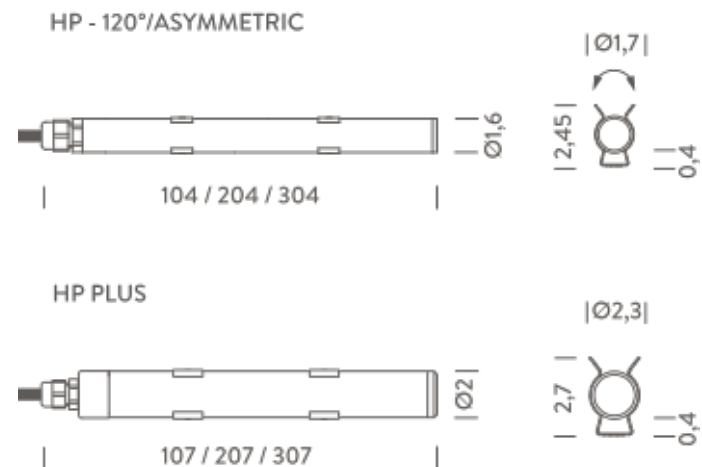

1M HP PLUS | 3000K

LAMPING

Source	Linear LED
Total power	20W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	2600lm
Initial luminaire efficacy	130lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	D
IP class	65
Dimensions	ø2x107cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,30 kg

Codes

BBOK0910015WPC

Structure

transparent

PACKAGE

Package 01

Dimension: 120x8,5x4 cm / Gross weight: 0,40 kg


Certificazioni



HP - 120°/ASYMMETRIC



HP PLUS

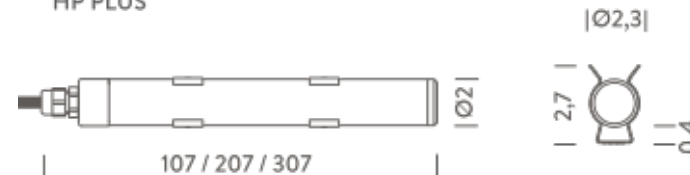

1M HP PLUS | 4000K

LAMPING

Source	Linear LED
Total power	20W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	2600lm
Initial luminaire efficacy	130lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	D
IP class	65
Dimensions	ø2x107cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,30 kg

Codes

BBOK0910015NPC

Structure


transparent

PACKAGE

Package 01

Dimension: 120x8,5x4 cm / Gross weight: 0,40 kg

Certificazioni

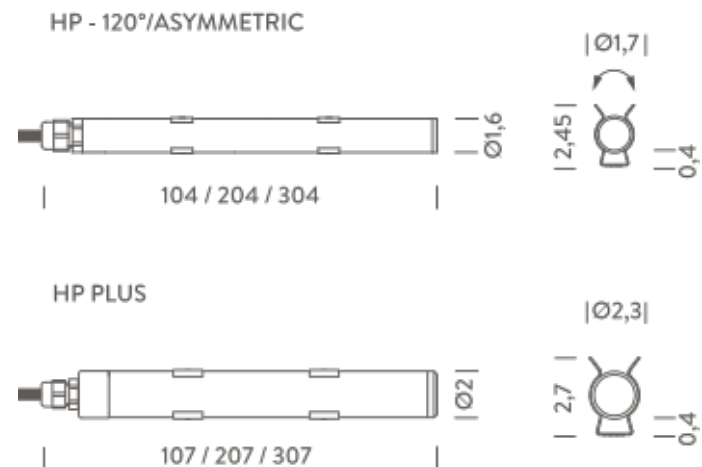

2M HP PLUS | 3000K

LAMPING

Source	Linear LED
Total power	40W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	5200lm
Initial luminaire efficacy	130lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	D
IP class	65
Dimensions	ø2x207cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,60 kg

Codes

BBOK0920015WPC

Structure


transparent

PACKAGE

Package 01

Dimension: 220x8,5x4 cm / Gross weight: 0,72 kg

Certificazioni

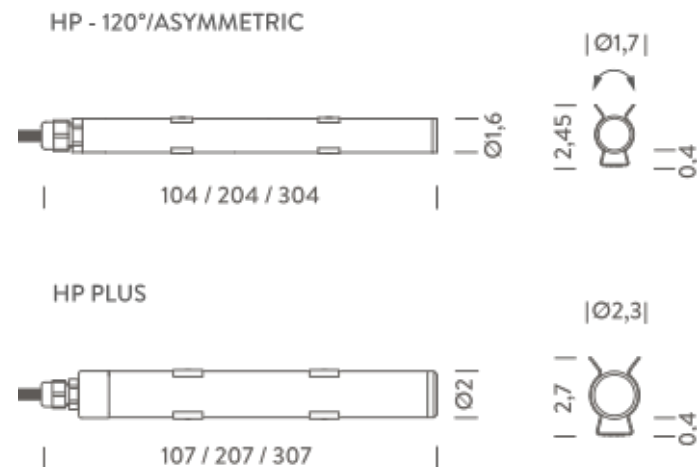

2M HP PLUS | 4000K

LAMPING

Source	Linear LED
Total power	40W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	5200lm
Initial luminaire efficacy	130lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	D
IP class	65
Dimensions	ø2x207cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,60 kg

Codes

BBOK0920015NPC

Structure


transparent

PACKAGE

Package 01

Dimension: 220x8,5x4 cm / Gross weight: 0,72 kg

Certificazioni

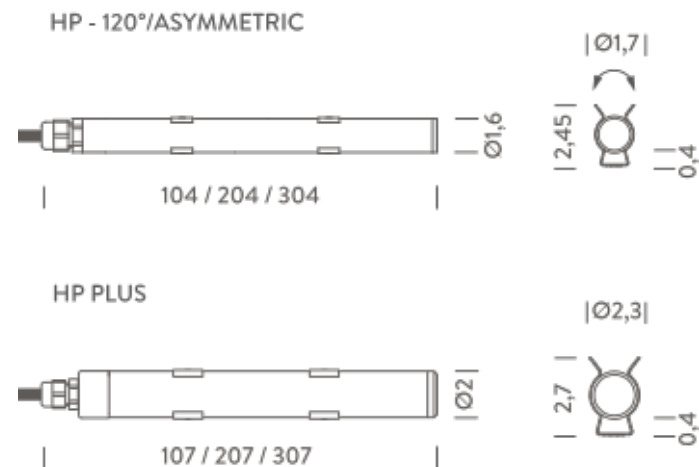

3M HP PLUS | 3000K

LAMPING

Source	Linear LED
Total power	60W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	7800lm
Initial luminaire efficacy	130lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	D
IP class	65
Dimensions	ø2x307cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,90 kg

Codes

BBOK0930015WPC

Structure

transparent

PACKAGE

Package 01

Dimension: 320x8,5x4 cm / Gross weight: 1,10 kg


Certificazioni



HP - 120°/ASYMMETRIC



HP PLUS

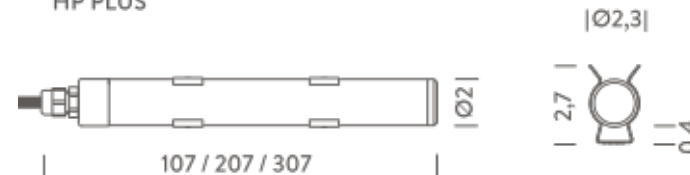

3M HP PLUS | 4000K

LAMPING

Source	Linear LED
Total power	60W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	7800lm
Initial luminaire efficacy	130lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	D
IP class	65
Dimensions	ø2x307cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,90 kg

Codes

BBOK0930015NPC

Structure

transparent

PACKAGE

Package 01

Dimension: 320x8,5x4 cm / Gross weight: 1,10 kg

Certificazioni

