

GILDOR

Gildor is a recessed LED spot for interior applications.

Finishing white painting (RAL 9016) and opal screen to allows a homogeneous lighting emission.

Gildor is available in two different lumen packages and colour temperatures.



3000K | 19W

LAMPING

Source	LED spot
Total power	19W
Emission	Diffused
Switching	according to driver
Tension	500mA
Color temperature	3000K
Luminous flux	1000lm
Initial luminaire efficacy	53/W
Initial chromaticity	SDCM < 3
Typ CRI	> 80
IP class	40
Dimensions	11,2x11,2x8,6cm
Materials	Aluminum
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Notes	cable 0,5m; driver not included
Customization options	1-10V, DALI, DMX, Casambi
Accessories	Drivers 500mA,
Net lamp weight	0,86 kg

Codes

MGIL0101G02WBO


Structure

white

PACKAGE

Package 01 Dimension: 30x22x20 cm / Gross weight: 1,1 kg

Certificazioni

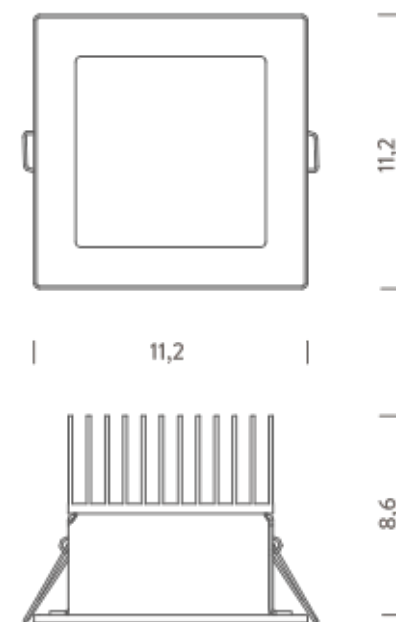

3000K | 26W

LAMPING

Source	LED spot
Total power	26W
Emission	Diffused
Switching	according to driver1500/
Tension	700mA
Color temperature	3000K
Luminous flux	1500lm
Initial luminaire efficacy	58lm/W
Initial chromaticity	SDCM < 3
Typ CRI	> 80
IP class	40
Dimensions	11,2x11,2x8,6cm
Materials	Aluminum
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Notes	cable 0,5m; driver not included
Customization options	1-10V, DALI, DMX, Casambi
Accessories	Drivers 700mA,
Net lamp weight	0,86 kg

Codes

MGIL0102G02WBO


Structure

white

PACKAGE

Package 01	Dimension: 30x22x20 cm / Gross weight: 1,1 kg
------------	---

Certificazioni

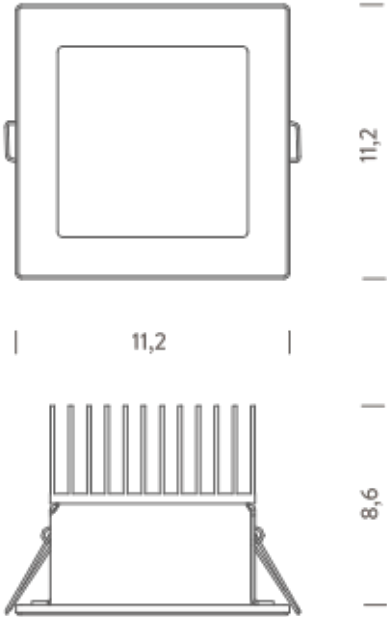

4000K | 19W

LAMPING

Source	LED spot
Total power	19W
Emission	Diffused
Switching	according to driver
Tension	500mA
Color temperature	4000K
Luminous flux	1000lm
Initial luminaire efficacy	53lm/W
Initial chromaticity	SDCM < 3
Typ CRI	> 80
IP class	40
Dimensions	11,2x11,2x8,6cm
Materials	Aluminum
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Notes	cable 0,5m; driver not included
Customization options	1-10V, DALI, DMX, Casambi;
Accessories	Drivers 500mA,
Net lamp weight	0,86 kg

Codes

MGIL0101G02NBO


Structure

white

PACKAGE

Package 01	Dimension: 30x22x20 cm / Gross weight: 1,1 kg
------------	---

Certificazioni

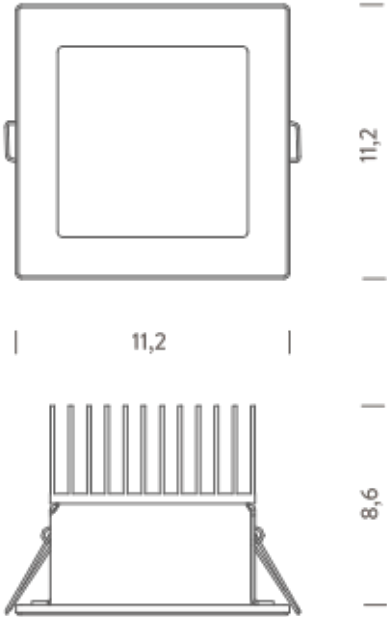

4000K | 26W

LAMPING

Source	LED spot
Total power	26W
Emission	Diffused
Switching	according to driver
Tension	700mA
Color temperature	4000K
Luminous flux	1500lm
Initial luminaire efficacy	58lm/W
Initial chromaticity	SDCM < 3
Typ CRI	> 80
IP class	40
Dimensions	11,2x11,2x8,6cm
Materials	Aluminum
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Notes	cable 0,5m; driver not included
Customization options	1-10V, DALI, DMX, Casambi
Accessories	Drivers 700mA,
Net lamp weight	0,86 kg

Codes

MGIL0102G02NBO

Structure

white

PACKAGE

Package 01	Dimension: 15x10x9,3 cm / Gross weight: 0,33 kg
------------	---

Certificazioni

