

WALKLINE WALL WASHER

WALKLINE is a walkable, linear LED 24V DC system for outdoor signalization or wall washer lighting. The WALKLINE consists of a naturally anodised aluminium profile with an opal resin coating for homogeneous light emission or with a wall washer optic. Available in various standard lengths. Dimmable 1-10V, DALI or DMX. Recessed box installation included.

WALKLINE and WALKLINE WALL WASHER are extremely resistant against scratches, foot and drive traffic and lend themselves for outdoor settings where signalling or decorative lighting is required.



0,60M | 3000K

LAMPING

Source	Linear LED
Total power	12W
Emission	wall washer
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1030lm
Typ CRI	90
IP class	67
Materials	aluminum
Mechanical impact protection code	IK10
Notes	driver not included, cable length 1m, certified 500kg static load, 3500kg dynamic load
Customization options	DMX, Casambi, body length
Accessories	Drivers 24VDC + DALI interface,


Codes

BWLK0206W52WAA

Structure

grey

Certificazioni

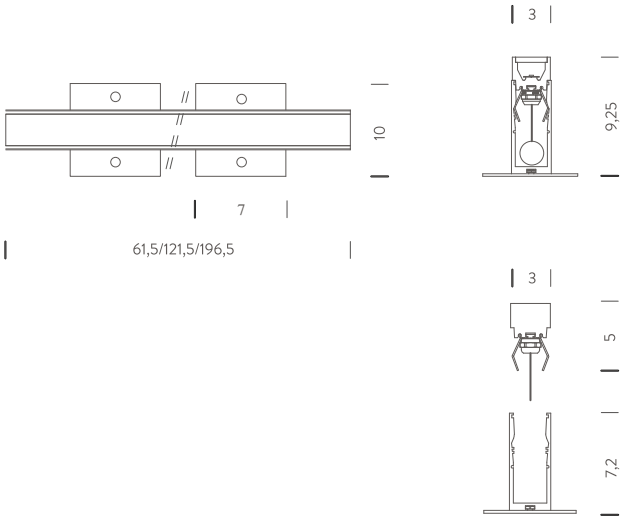

0,60M | 4000K

LAMPING


Source	Linear LED
Total power	12W
Emission	wall washer
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1144lm
Typ CRI	90
IP class	67
Materials	aluminum
Mechanical impact protection code	IK10
Notes	driver not included, cable length 1m, certified 500kg static load, 3500kg dynamic load
Customization options	DMX, Casambi, body length
Accessories	Drivers 24VDC + DALI interface,

Codes
BWLK0206W52NAA

Certificazioni



Structure
grey

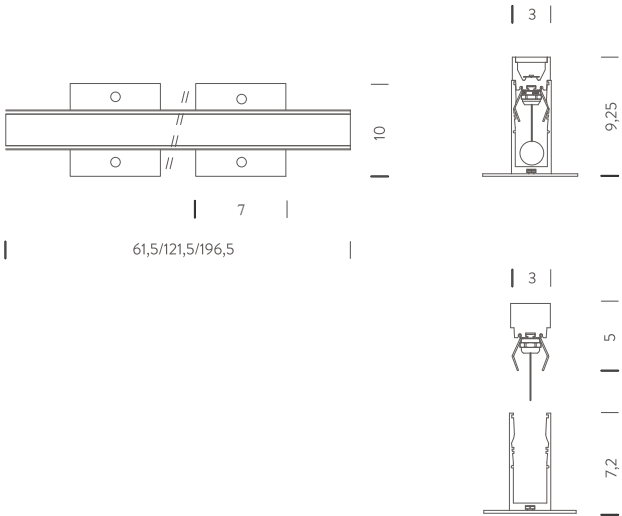

1,2M | 3000K

LAMPING

Source	Linear LED
Total power	24W
Emission	wall washer
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	2060lm
Typ CRI	90
IP class	67
Materials	aluminum
Mechanical impact protection code	IK10
Notes	driver not included, cable length 1m, certified 500kg static load, 3500kg dynamic load
Customization options	DMX, Casambi, body length
Accessories	Drivers 24VDC + DALI interface,


Codes

BWLK0209W52WAA

Structure

grey

Certificazioni

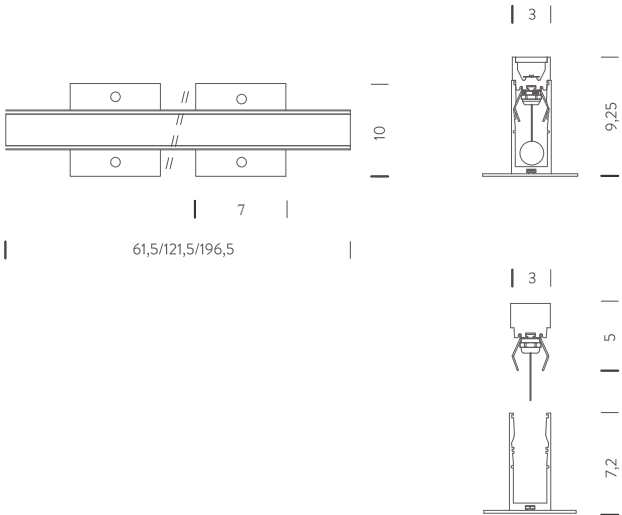

1,2M | 4000K

LAMPING


Source	Linear LED
Total power	24W
Emission	wall washer
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	2288lm
Typ CRI	90
IP class	67
Materials	aluminum
Mechanical impact protection code	IK10
Notes	driver not included, cable length 1m, certified 500kg static load, 3500kg dynamic load
Customization options	DMX, Casambi, body length
Accessories	Drivers 24VDC + DALI interface,

Codes
BWLK0209W52NAA

Certificazioni



Structure
grey

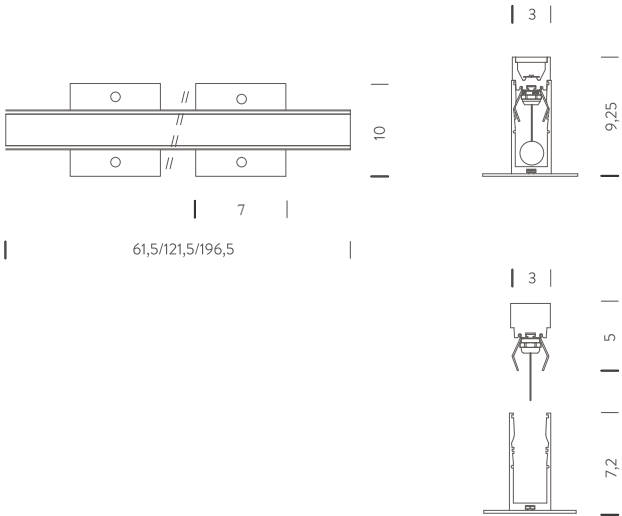

2M | 3000K

LAMPING


Source	Linear LED
Total power	40W
Emission	wall washer
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	3433lm
Typ CRI	90
IP class	67
Materials	aluminum
Mechanical impact protection code	IK10
Notes	driver not included, cable length 1m, certified 500kg static load, 3500kg dynamic load
Customization options	DMX, Casambi, body length
Accessories	Drivers 24VDC + DALI interface,

Codes
BWLK0220W52WAA

Certificazioni



Structure
grey

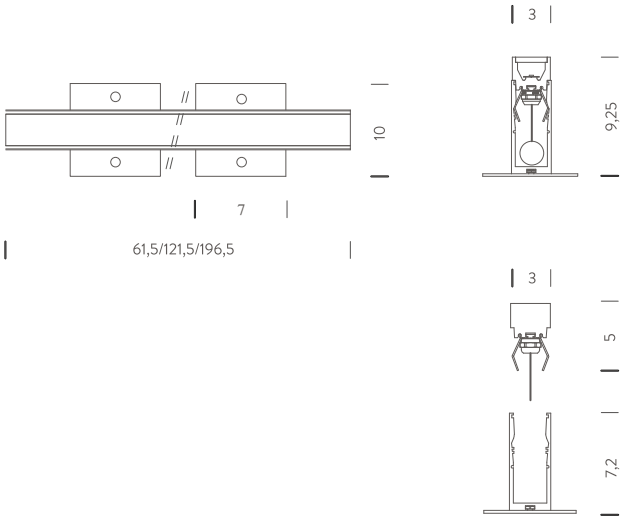

2M | 4000K

LAMPING

Source	Linear LED
Total power	40W
Emission	wall washer
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	3815lm
Typ CRI	90
IP class	67
Materials	aluminum
Mechanical impact protection code	IK10
Notes	driver not included, cable length 1m, certified 500kg static load, 3500kg dynamic load
Customization options	DMX, Casambi, body length
Accessories	Drivers 24VDC + DALI interface,

Codes
BWLK0220W52NAA

Certificazioni



Structure
grey

