

# WALKLINE WALL WASHER

WALKLINE is a walkable, linear LED 24V DC system for outdoor signalization or wall washer lighting. The WALKLINE consists of a naturally anodised aluminium profile with an opal resin coating for homogeneous light emission or with a wall washer optic. Available in various standard lengths. Dimmable 1-10V, DALI or DMX. Recessed box installation included.

WALKLINE and WALKLINE WALL WASHER are extremely resistant against scratches, foot and drive traffic and lend themselves for outdoor settings where signalling or decorative lighting is required.



0,50M | 3000K

## LAMPING

Source	Linear LED
Total power	8W
Emission	wall washer
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	625lm
Typ CRI	90
IP class	67
Materials	aluminum
Mechanical impact protection code	IK10
Notes	driver not included, cable length 0,5m, certified 500kg static load, 3500kg dynamic load
Customization options	1-10V, DALI, DMX, Casambi, body length
Accessories	Drivers 24VDC + DALI interface,

## Codes


BWLK0205226WAA

## Structure

grey

## Certificazioni

UK  
CA

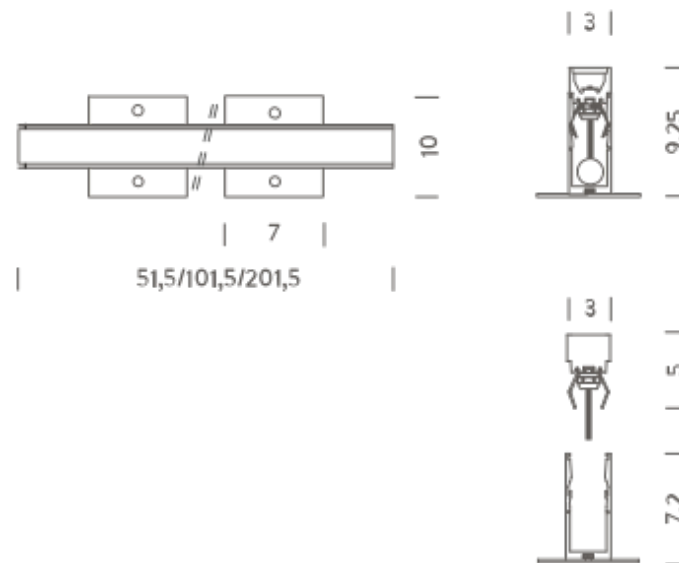

0,50M | 4000K

## LAMPING

Source	Linear LED
Total power	8W
Emission	wall washer
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	650lm
Typ CRI	90
IP class	67
Materials	aluminum
Mechanical impact protection code	IK10
Notes	driver not included, cable length 0,5m, certified 500kg static load, 3500kg dynamic load
Customization options	1-10V, DALI, DMX, Casambi, body length
Accessories	Drivers 24VDC + DALI interface,


## Codes

BWLK0205226NAA

## Structure

grey

## Certificazioni

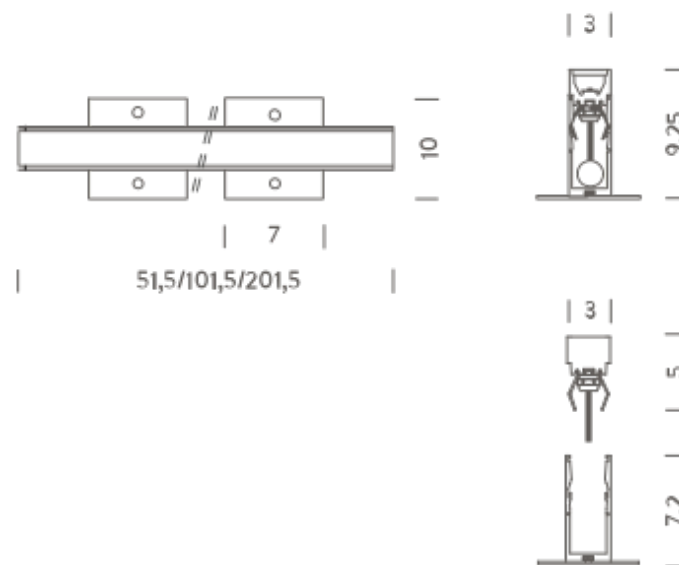

1M | 3000K

## LAMPING

Source	Linear LED
Total power	16W
Emission	wall washer
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1250lm
Typ CRI	90
IP class	67
Materials	aluminum
Mechanical impact protection code	IK10
Notes	driver not included, cable length 0,5m, certified 500kg static load, 3500kg dynamic load
Customization options	1-10V, DALI, DMX, Casambi, body length
Accessories	Drivers 24VDC + DALI interface,


## Codes

BWLK0210226WAA

## Structure

grey

## Certificazioni

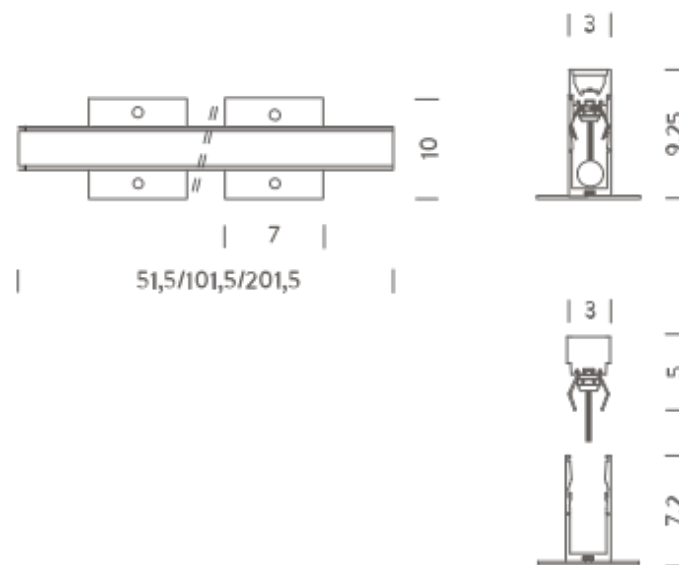

1M | 4000K

### LAMPING

Source	Linear LED
Total power	16W
Emission	wall washer
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1300lm
Typ CRI	90
IP class	67
Materials	aluminum
Mechanical impact protection code	IK10
Notes	driver not included, cable length 0,5m, certified 500kg static load, 3500kg dynamic load
Customization options	1-10V, DALI, DMX, Casambi, body length
Accessories	Drivers 24VDC + DALI interface,


### Codes

BWLK0210226NAA

### Structure

grey

### Certificazioni

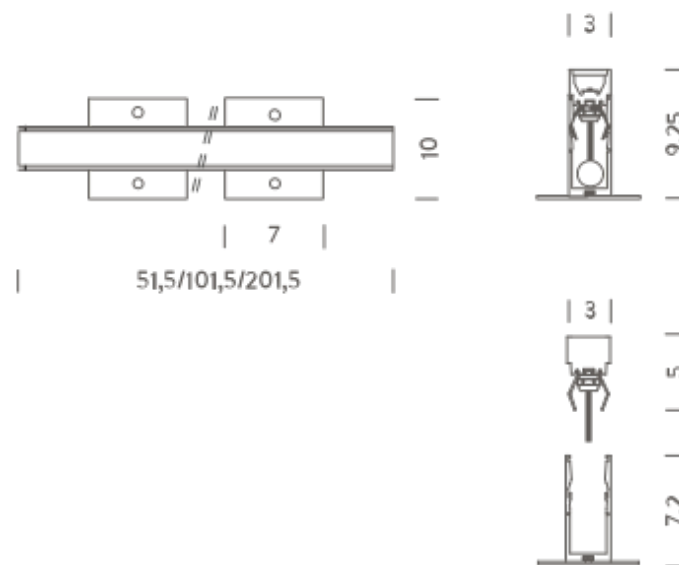

2M | 3000K

## LAMPING

Source	Linear LED
Total power	32W
Emission	wall washer
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	2500lm
Typ CRI	90
IP class	67
Materials	aluminum
Mechanical impact protection code	IK10
Notes	driver not included, cable length 0,5m, certified 500kg static load, 3500kg dynamic load
Customization options	1-10V, DALI, DMX, Casambi, body length
Accessories	Drivers 24VDC + DALI interface,

## Codes


BWLK0220226WAA

## Structure

grey

## Certificazioni

UK  
CA

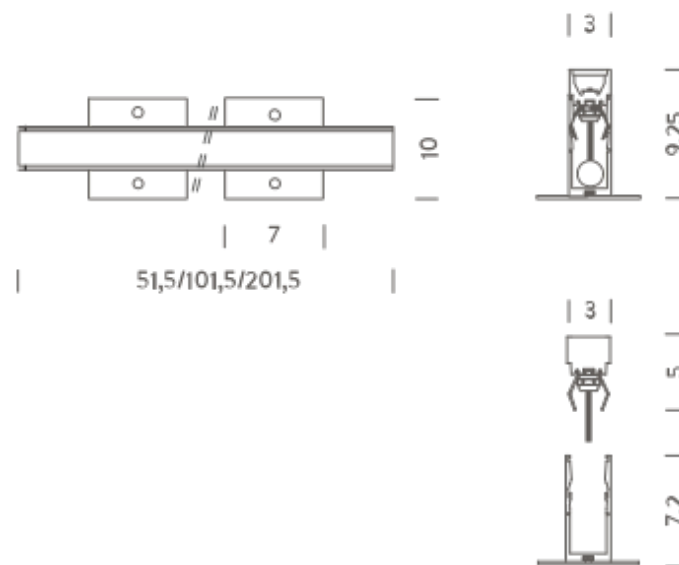

2M | 4000K

## LAMPING

Source	Linear LED
Total power	32W
Emission	wall washer
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	2600lm
Typ CRI	90
IP class	67
Materials	aluminum
Mechanical impact protection code	IK10
Notes	driver not included, cable length 0,5m, certified 500kg static load, 3500kg dynamic load
Customization options	1-10V, DALI, DMX, Casambi, body length
Accessories	Drivers 24VDC + DALI interface,

## Codes

BWLK0220226NAA

## Structure

grey

## Certificazioni

