

LUX CEILING TRIMLESS

Lux is a collection of high-performance spots for outdoor applications. Lux Ceiling Trimless is suitable for trimless installation in plasterboard or wooden ceiling and guarantees direct and homogeneous lighting. Available in different finishes, color temperatures and beam angles.



17° | 3000K

LUX CEILING TRIMLESS 4,2W

LAMPING

Source	LED spot
Total power	4,2W
Emission	Direct 17°
Switching	according to driver
Tension	350mA
Color temperature	3000K
Luminous flux	366lm
Initial luminaire efficacy	90lm/W
Initial chromaticity	SDCM<3
Typ CRI	>90
IP class	65
Dimensions	Ø7.2x8.3mm
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C

Notes
Cable length 1m, driver not included. Compatible control:
1-10V, DALI, TRIAC, series connection, CRI90



Codes

BLUC2101N21WAA
BLUC2101N21WAN

Structure

grey
black

Certificazioni

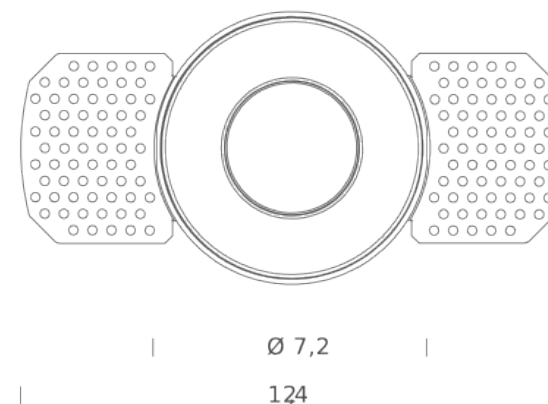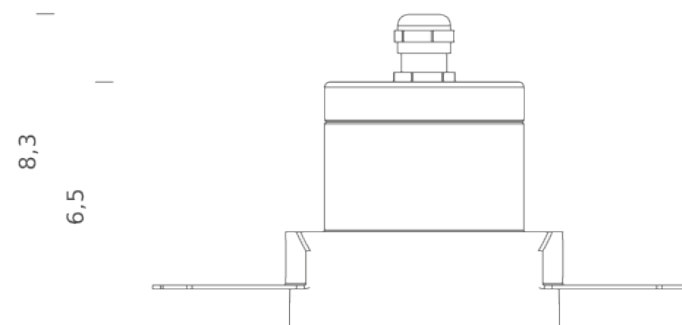

46° | 3000K

LUX CEILING TRIMLESS 4,2W

LAMPING

Source	LED spot
Total power	4,2W
Emission	Direct 46°
Switching	according to driver
Tension	350mA
Color temperature	3000K
Luminous flux	366lm
Initial luminaire efficacy	90lm/W
Initial chromaticity	SDCM<3
Typ CRI	>90
IP class	65
Dimensions	Ø7.2x8.3mm
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C

Notes
Cable length 1m, driver not included. Compatible control:
1-10V, DALI, TRIAC, series connection, CRI90



Codes

BLUC2101721WAA
BLUC2101721WAN

Structure

grey
black

Certificazioni

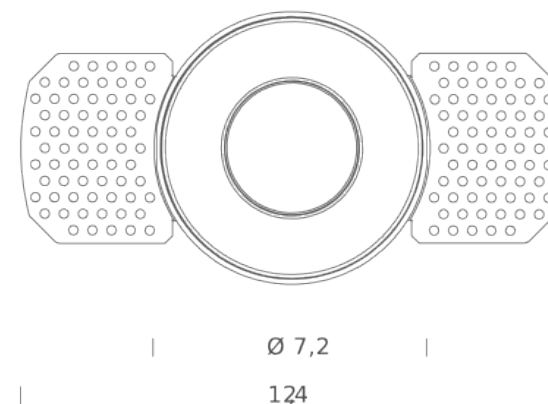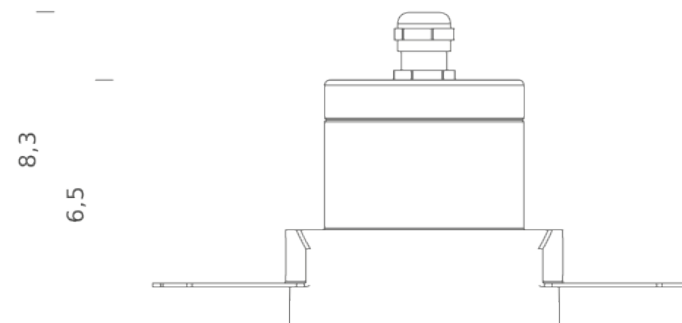

17° | 4000K

LUX CEILING TRIMLESS 4,2W

LAMPING

Source	LED spot
Total power	4,2W
Emission	Direct 17°
Switching	according to driver
Tension	350mA
Color temperature	4000K
Luminous flux	366lm
Initial luminaire efficacy	90lm/W
Initial chromaticity	SDCM<3
Typ CRI	>90
IP class	65
Dimensions	Ø7.2x8.3mm
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C

Notes
Cable length 1m, driver not included. Compatible control:
1-10V, DALI, TRIAC, series connection, CRI90

Codes

BLUC2101N21NAA




BLUC2101N21NAN

Structure

grey

black

Certificazioni

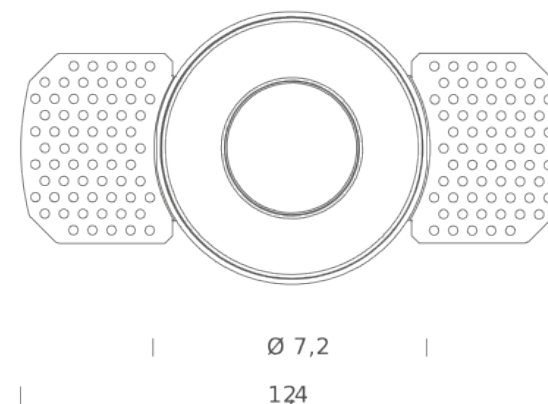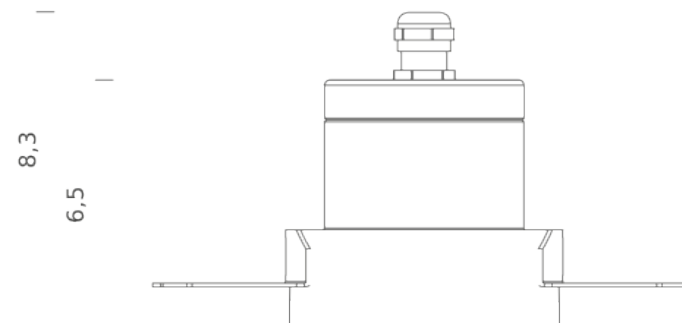

46° | 4000K

LUX CEILING TRIMLESS 4,2W

LAMPING

Source	LED spot
Total power	4,2W
Emission	Direct 46°
Switching	according to driver
Tension	350mA
Color temperature	4000K
Luminous flux	366lm
Initial luminaire efficacy	90lm/W
Initial chromaticity	SDCM<3
Typ CRI	>90
IP class	65
Dimensions	Ø7.2x8.3mm
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C

Notes
Cable length 1m, driver not included. Compatible control:
1-10V, DALI, TRIAC, series connection, CRI90

Codes

BLUC2101721NAA

BLUC2101721NAN

Structure

grey

black

Certificazioni

