

SALINA CEILING

Family of ceiling indoor spots for accent lighting. The modular structure separates the lamp into several independent parts. The outer rings with different finishes are simple to assemble and can be replaced easily to meet different opening requirements and appearance effects. Salina Ceiling is available with a variety optics to achieve different lighting effects.



CEILING 15° | 2700K

LAMPING

Source	LED
Total power	12W
Emission	Direct 15°
Tension	220/240V
Color temperature	2700K
Initial chromaticity	SDCM<3
Typ CRI	>90
IP class	20
Dimensions	ø7.2x15
Ambient temperature range	-15°C / 35°C
Performance ambient temperature	20°C

Codes

SALLN241


SALLW241

Structure

matte black

matte white

Certificazioni

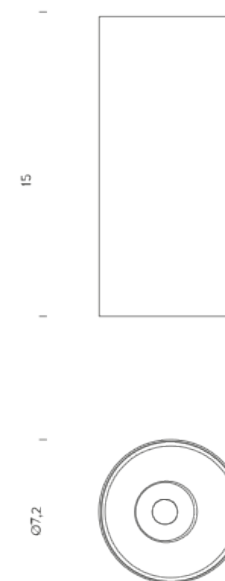

CEILING 15° | 3000K

LAMPING

Source	LED
Total power	12W
Emission	Direct 15°
Tension	220/240V
Color temperature	3000K
Initial chromaticity	SDCM<3
Typ CRI	>90
IP class	20
Dimensions	ø7.2x15
Ambient temperature range	-15°C / 35°C
Performance ambient temperature	20°C


Codes

SALLN243
SALLW243

Structure

matte black
matte white

Certificazioni

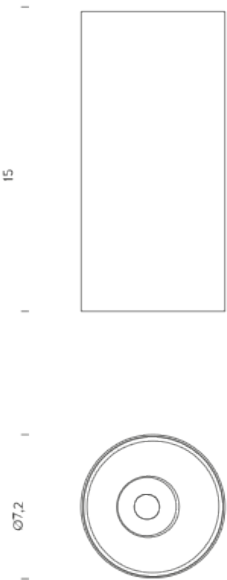

CEILING 35° | 2700K

LAMPING

Source	LED
Total power	12W
Emission	Direct 35°
Tension	220/240V
Color temperature	2700K
Initial chromaticity	SDCM<3
Typ CRI	>90
IP class	20
Dimensions	ø7.2x15
Ambient temperature range	-15°C / 35°C
Performance ambient temperature	20°C


Codes

SALLN243
SALLW243

Structure

matte black
matte white

Certificazioni

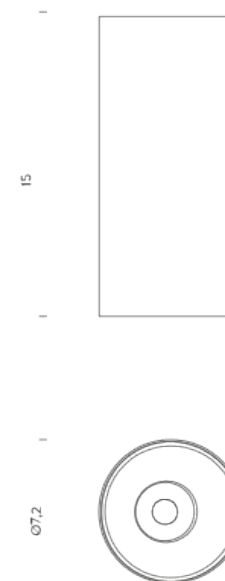

CEILING 35° | 3000°

LAMPING

Source	LED
Total power	12W
Emission	Direct 35°
Tension	220/240V
Color temperature	3000K
Initial chromaticity	SDCM<3
Typ CRI	>90
IP class	20
Dimensions	ø7.2x15
Ambient temperature range	-15°C / 35°C
Performance ambient temperature	20°C

Codes

SALLN343
SALLW343

Structure

matte black
matte white

Certificazioni

