

# WALKLINE FAÇADE

Walkline Façade is a ceiling LED linear system for outdoor. Natural anodized aluminium profile with a resin transparent surface. Walkline Façade is adjustable and available in different lengths, with wallwasher optic 30°. Dimmable 1-10V, DALI or DMX.



0.61M | 3000K

## LAMPING

|                                   |                                                                |
|-----------------------------------|----------------------------------------------------------------|
| Source                            | LED                                                            |
| Total power                       | 11W                                                            |
| Emission                          | wallwasher 30°                                                 |
| Switching                         | 1-10/DALI/DMX/CASAMBI                                          |
| Tension                           | 24VDC                                                          |
| Color temperature                 | 3000K                                                          |
| Luminous flux                     | 800lm                                                          |
| Initial luminaire efficacy        | >70lm/W                                                        |
| Initial chromaticity              | SDCM<3                                                         |
| Typ CRI                           | >90                                                            |
| Energy class                      | F                                                              |
| IP class                          | 67                                                             |
| Dimensions                        | 46 x 30 x 614mm                                                |
| Materials                         | aluminium/PU resin                                             |
| Ambient temperature range         | -20°C / 35°C                                                   |
| Performance ambient temperature   | 25°C                                                           |
| Mechanical impact protection code | IK10                                                           |
| Customization options             | different finishes/CCT/ different lengths/diffuse opal version |
| Net lamp weight                   | 1.5 kg                                                         |


## Codes

BWLFS806452WAA

## Structure

grey

## Certificazioni

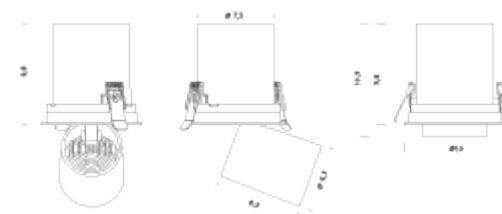

0.61M | 4000K

## LAMPING

|                                   |                                                                |
|-----------------------------------|----------------------------------------------------------------|
| Source                            | LED                                                            |
| Total power                       | 11W                                                            |
| Emission                          | wallwasher 30°                                                 |
| Switching                         | 1-10/DALI/DMX/CASAMBI                                          |
| Tension                           | 24VDC                                                          |
| Color temperature                 | 4000K                                                          |
| Initial chromaticity              | SDCM<3                                                         |
| Typ CRI                           | >90                                                            |
| Energy class                      | F                                                              |
| IP class                          | 67                                                             |
| Dimensions                        | 46 x 30 x 614mm                                                |
| Materials                         | aluminium/PU resin                                             |
| Ambient temperature range         | -20°C / 35°C                                                   |
| Performance ambient temperature   | 25°C                                                           |
| Mechanical impact protection code | IK10                                                           |
| Customization options             | different finishes/CCT/ different lengths/diffuse opal version |
| Net lamp weight                   | 1.5 kg                                                         |


## Codes

BWLFS806452NAA

## Structure

grey

## Certificazioni

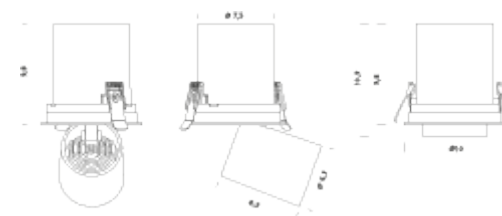

0.91M | 3000K

## LAMPING

|                                   |                                                                |
|-----------------------------------|----------------------------------------------------------------|
| Source                            | LED                                                            |
| Total power                       | 16W                                                            |
| Emission                          | wallwasher 30°                                                 |
| Switching                         | 1-10/DALI/DMX/CASAMBI                                          |
| Tension                           | 24VDC                                                          |
| Color temperature                 | 3000K                                                          |
| Luminous flux                     | 1200lm                                                         |
| Initial luminaire efficacy        | >70lm/W                                                        |
| Initial chromaticity              | SDCM<3                                                         |
| Typ CRI                           | >90                                                            |
| Energy class                      | F                                                              |
| IP class                          | 67                                                             |
| Dimensions                        | 46 x 30 x 914mm                                                |
| Materials                         | aluminium/PU resin                                             |
| Ambient temperature range         | -20°C / 35°C                                                   |
| Performance ambient temperature   | 25°C                                                           |
| Mechanical impact protection code | IK10                                                           |
| Customization options             | different finishes/CCT/ different lengths/diffuse opal version |
| Net lamp weight                   | 2.3 kg                                                         |


## Codes

BWLFS809452WAA

## Structure

grey

## Certificazioni

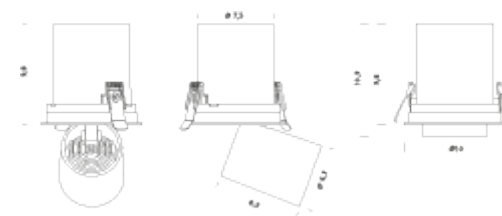

0.91M | 4000K

## LAMPING

|                                   |                                                                |
|-----------------------------------|----------------------------------------------------------------|
| Source                            | LED                                                            |
| Total power                       | 16W                                                            |
| Emission                          | wallwasher 30°                                                 |
| Switching                         | 1-10/DALI/DMX/CASAMBI                                          |
| Tension                           | 24VDC                                                          |
| Color temperature                 | 4000K                                                          |
| Initial chromaticity              | SDCM<3                                                         |
| Typ CRI                           | >90                                                            |
| Energy class                      | F                                                              |
| IP class                          | 67                                                             |
| Dimensions                        | 46 x 30 x 914mm                                                |
| Materials                         | aluminium/PU resin                                             |
| Ambient temperature range         | -20°C / 35°C                                                   |
| Performance ambient temperature   | 25°C                                                           |
| Mechanical impact protection code | IK10                                                           |
| Customization options             | different finishes/CCT/ different lengths/diffuse opal version |
| Net lamp weight                   | 2.3 kg                                                         |


## Codes

BWLFS809452NAA

## Structure

grey

## Certificazioni

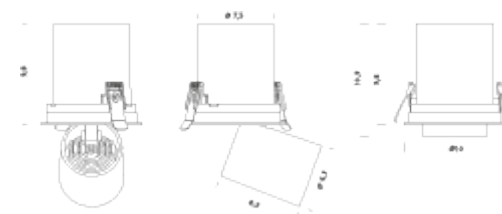

1.21M | 3000K

## LAMPING

|                                   |                                                                |
|-----------------------------------|----------------------------------------------------------------|
| Source                            | LED                                                            |
| Total power                       | 22W                                                            |
| Emission                          | wallwasher 30°                                                 |
| Switching                         | 1-10/DALI/DMX/CASAMBI                                          |
| Tension                           | 24VDC                                                          |
| Color temperature                 | 3000K                                                          |
| Luminous flux                     | 1600lm                                                         |
| Initial luminaire efficacy        | >70lm/m                                                        |
| Initial chromaticity              | SDCM<3                                                         |
| Typ CRI                           | >90                                                            |
| Energy class                      | F                                                              |
| IP class                          | 67                                                             |
| Dimensions                        | 46 x 30 x 1214mm                                               |
| Materials                         | aluminium/PU resin                                             |
| Ambient temperature range         | -20°C / 35°C                                                   |
| Performance ambient temperature   | 25°C                                                           |
| Mechanical impact protection code | IK10                                                           |
| Customization options             | different finishes/CCT/ different lengths/diffuse opal version |
| Net lamp weight                   | 3 kg                                                           |


## Codes

BWLFS812452WAA

## Structure

grey

## Certificazioni

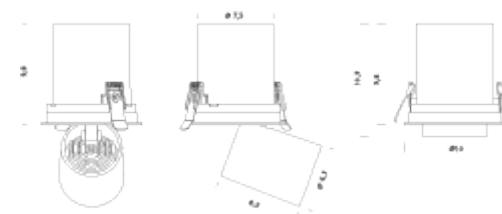

1.21M | 4000K

## LAMPING

|                                   |                                                                |
|-----------------------------------|----------------------------------------------------------------|
| Source                            | LED                                                            |
| Total power                       | 22W                                                            |
| Emission                          | wallwasher 30°                                                 |
| Switching                         | 1-10/DALI/DMX/CASAMBI                                          |
| Tension                           | 24VDC                                                          |
| Color temperature                 | 4000K                                                          |
| Initial chromaticity              | SDCM<3                                                         |
| Typ CRI                           | >90                                                            |
| Energy class                      | F                                                              |
| IP class                          | 67                                                             |
| Dimensions                        | 46 x 30 x 1214mm                                               |
| Materials                         | aluminium/PU resin                                             |
| Ambient temperature range         | -20°C / 35°C                                                   |
| Performance ambient temperature   | 25°C                                                           |
| Mechanical impact protection code | IK10                                                           |
| Customization options             | different finishes/CCT/ different lengths/diffuse opal version |
| Net lamp weight                   | 3 kg                                                           |

## Codes

BWLFS812452NAA

## Structure

grey

## Certificazioni

