

FANTE

Fante is an high emission adjustable spot compatible with 3C track.

Available in the finishes black and white. 20W, 28W and 28W DALI.

Driver on-board.



20W | 2700K

LAMPING

Source	LED
Total power	20W
Emission	direct adjustable 36°
Tension	220/240V
Color temperature	2700K
Initial luminaire efficacy	105 lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	F
IP class	20
Dimensions	Ø100 x L70mm
Materials	aluminium
Ambient temperature range	35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK04
Customization options	15° optic
Net lamp weight	0.8 kg


Codes

MFAN5401757DNE
MFAN5401757DBO

Structure

black
white

Certificazioni

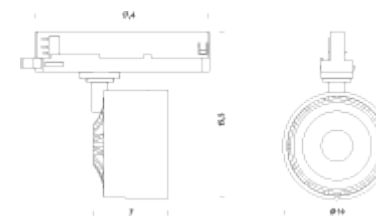

20W | 3000K

LAMPING

Source	LED
Total power	20W
Emission	direct adjustable 36°
Tension	220/240V
Color temperature	3000K
Luminous flux	2100lm
Initial luminaire efficacy	105 lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	F
IP class	20
Dimensions	Ø100 x L70mm
Materials	aluminium
Ambient temperature range	35°
Performance ambient temperature	25°C
Mechanical impact protection code	IK04
Customization options	15° optic
Net lamp weight	0.8 kg


Codes

MFAN5401757WNE
MFAN5401757WBO

Structure

black
white

Certificazioni

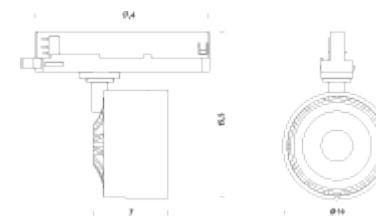

28W | 2700K

LAMPING

Source	LED
Total power	28W
Emission	direct adjustable 36°
Tension	220/240V
Color temperature	2700K
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	F
IP class	20
Dimensions	Ø100 x L70mm
Materials	aluminium
Ambient temperature range	35°
Performance ambient temperature	25°C
Mechanical impact protection code	IK04
Customization options	15° optic
Net lamp weight	0.8 kg


Codes

MFAN5401756DNE
MFAN5401756DBO

Structure

black
white

Certificazioni

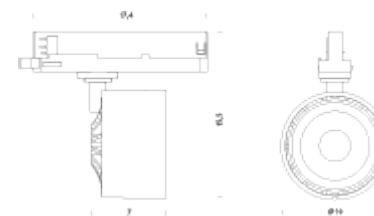

28W | 3000K

LAMPING

Source	LED
Total power	28W
Emission	direct adjustable 36°
Tension	220/240V
Color temperature	3000K
Luminous flux	3340lm
Initial luminaire efficacy	120 lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	F
IP class	20
Dimensions	Ø100x L70mm
Materials	aluminium
Ambient temperature range	35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK04
Customization options	15° optic
Net lamp weight	0.8 kg


Codes

MFAN5401756WNE
MFAN5401756WBO

Structure

black
white

Certificazioni

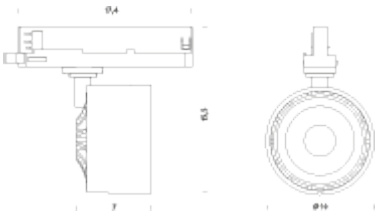

28W - DALI | 2700K

LAMPING

Source	LED
Total power	28W
Emission	direct adjustable 36°
Switching	DALI
Tension	220/240V
Color temperature	2700K
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	F
IP class	20
Dimensions	Ø100 x L70mm
Materials	aluminium
Ambient temperature range	35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK04
Customization options	15° optic
Net lamp weight	0.8 kg


Codes

MFAN5701756DNE
MFAN5701756DBO

Structure

black
white

Certificazioni

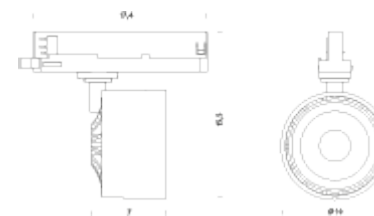

28W - DALI | 3000K

LAMPING

Source	LED
Total power	28W
Emission	direct adjustable 36°
Switching	DALI
Tension	220/240V
Color temperature	3000K
Luminous flux	3340lm
Initial luminaire efficacy	120 lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	F
IP class	20
Dimensions	Ø100 x L70mm
Materials	aluminium
Ambient temperature range	35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK04
Customization options	15° optic
Net lamp weight	0.8 kg

Codes

MFAN5701756WNE
MFAN5701756WBO

Structure

black
white

Certificazioni

