

# POP UP

Pop Up is a round adjustable recessed spot for accent lighting.

Available in the finishes black and white.



# 2700K

## LAMPING

Source	LED
Total power	10W
Emission	direct adjustable 38°
Switching	according to driver
Tension	36V/max 270mA(our drivers)
Color temperature	2700K
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	G
IP class	20
Dimensions	D100 x 109mm
Ambient temperature range	35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK04
Notes	compatible controls 1-10V/DALI/TRIAC
Customization options	15° optic
Net lamp weight	0.5 kg


## Codes

MPOP0101758DNE  
MPOP0101758DBO

## Structure

black  
white

## Certificazioni

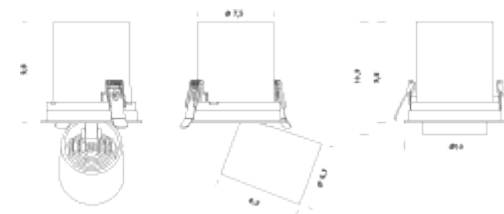

# 3000K

## LAMPING

Source	LED
Total power	10W
Emission	direct adjustable 38°
Switching	according to driver
Tension	36V/max 270mA(our drivers)
Color temperature	3000K
Luminous flux	800lm
Initial luminaire efficacy	80lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	G
IP class	20
Dimensions	D100 x 109mm
Ambient temperature range	35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK04
Notes	compatible controls 1-10V/DALI/TRIAC
Customization options	15° optic
Net lamp weight	0.5 kg

## Codes

MPOP0101758WNE

MPOP0101758WBO

## Structure

black

white

## Certificazioni

