

PATTERN

Pattern is a recessed downlight spot, composed of a lens module with a fixed optic. Available in the black finish. 6W, 10W and 20W. Driver not included.



6W | 2700K

LAMPING

Source	LED
Total power	3x2W
Emission	direct 36°
Switching	according to driver
Tension	9V/700mA
Color temperature	2700K
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	F
IP class	20
Dimensions	98 x 56,5 x 70 mm
Materials	aluminium
Ambient temperature range	35°C
Performance ambient temperature	25°C
Notes	compatible controls DALI/1-10V-TRIAC
Net lamp weight	0.2 kg


Codes

MPAT2103U67DNE

Structure

black

Certificazioni

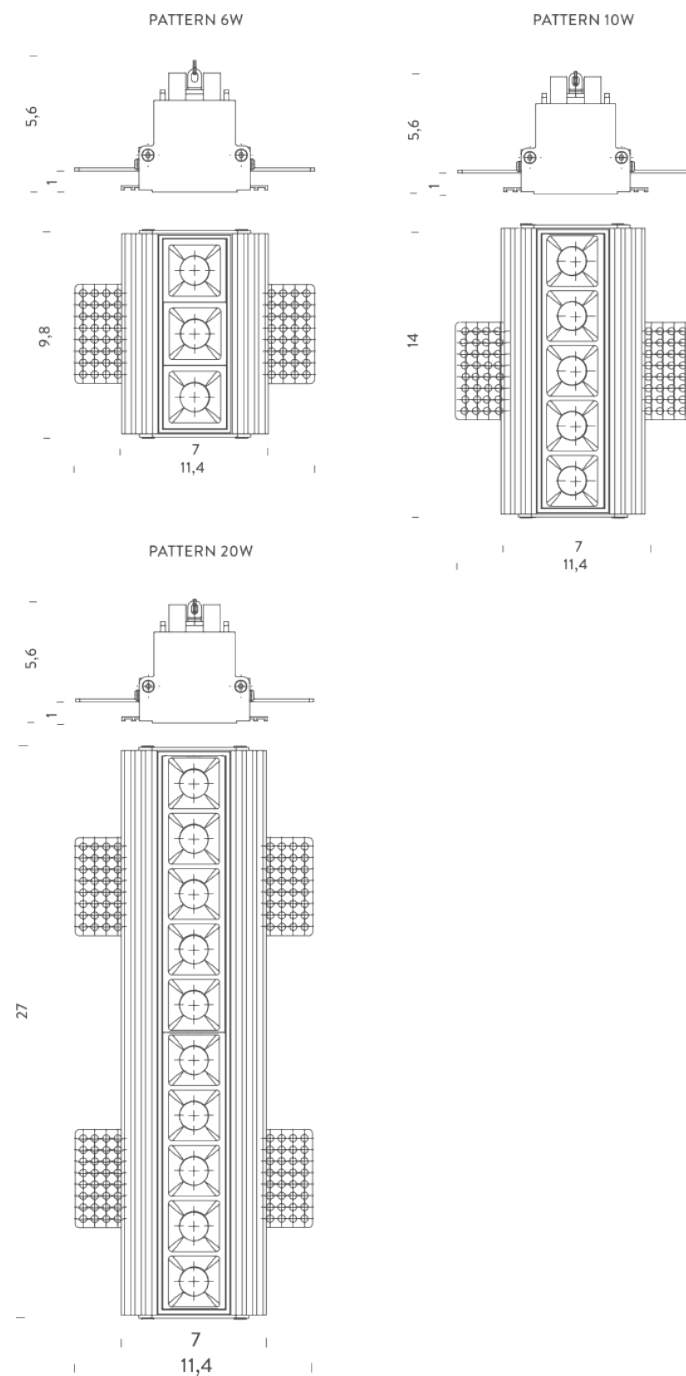

6W | 3000K

LAMPING

Source	LED
Total power	3x2W
Emission	direct 36°
Switching	according to driver
Tension	9V/700mA
Color temperature	3000K
Luminous flux	490lm
Initial luminaire efficacy	82lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	F
IP class	20
Dimensions	98 x 56,5 x 70 mm
Materials	aluminium
Ambient temperature range	35°C
Performance ambient temperature	25°C
Notes	compatible controls DALI/1-10V-TRIAC
Net lamp weight	0.2 kg


Codes

MPAT2103U67WNE

Structure

black

Certificazioni

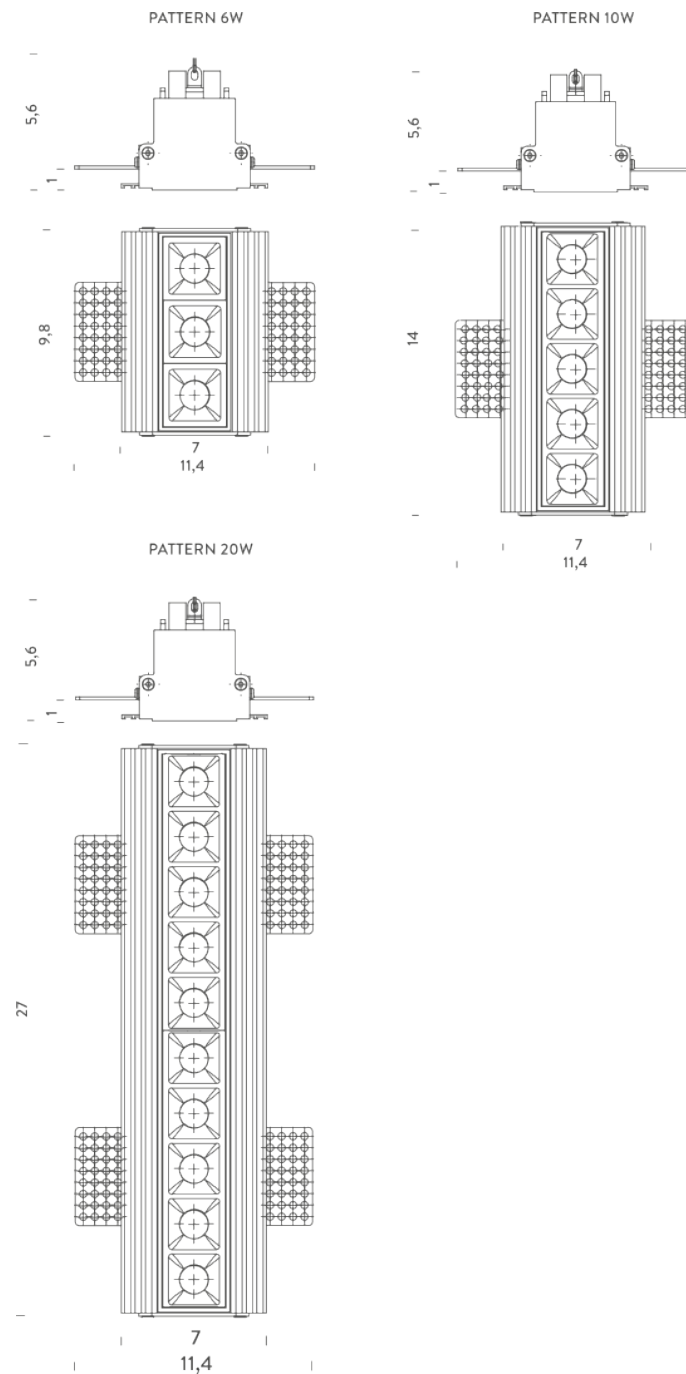

10W | 2700K

LAMPING

Source	LED
Total power	10W
Emission	direct 36°
Switching	according to driver
Tension	15V/700mA
Color temperature	2700K
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	F
IP class	20
Dimensions	141 x 56,5 x 70mm
Materials	aluminium
Ambient temperature range	35°C
Performance ambient temperature	25°c
Notes	compatible controls DALI/1-10V-TRIAC
Net lamp weight	0.3 kg


Codes

MPAT2105U67DNE

Structure

black

Certificazioni

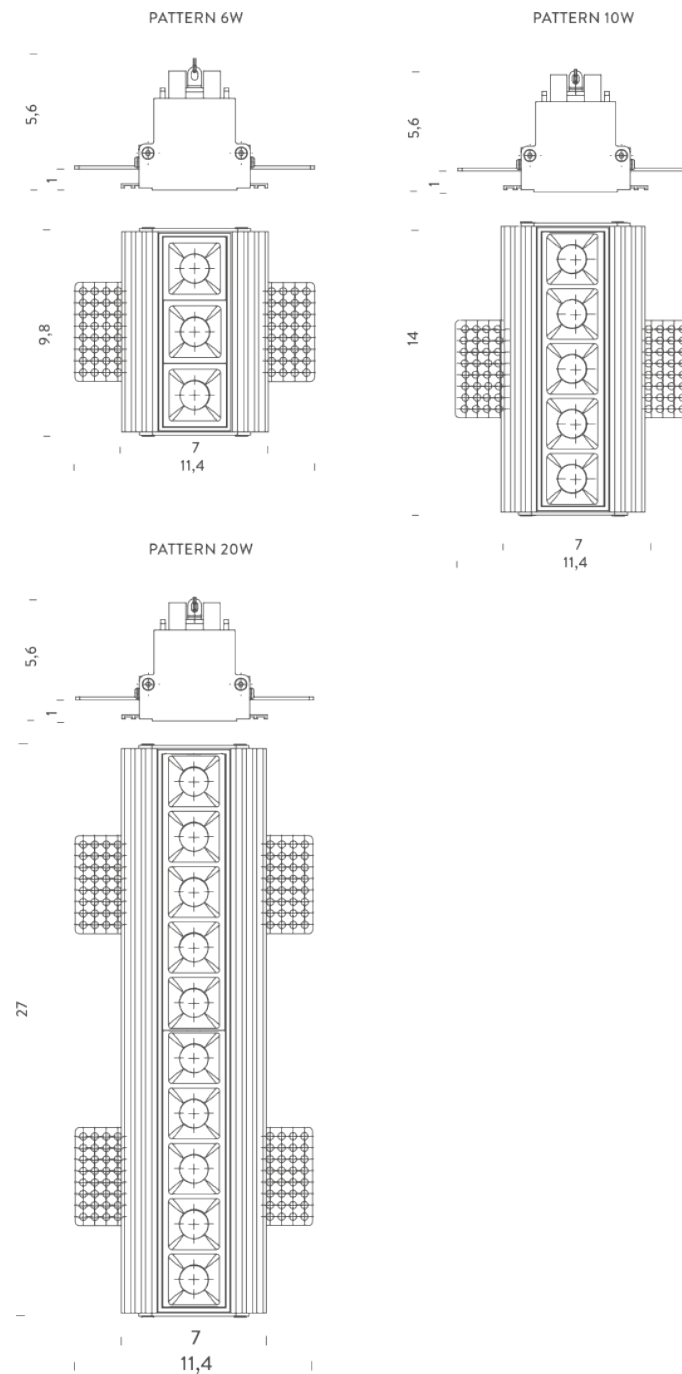

10W | 3000K

LAMPING

Source	LED
Total power	10W
Emission	direct 36°
Switching	according to driver
Tension	15V/700mA
Color temperature	3000K
Luminous flux	736lm
Initial luminaire efficacy	74lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	F
IP class	20
Dimensions	141 x 56,5 x 70mm
Materials	aluminium
Ambient temperature range	35°C
Performance ambient temperature	25°C
Notes	compatible controls DALI/1-10V-TRIAC
Net lamp weight	0.3 kg


Codes

MPAT2105U67WNE

Structure

black

Certificazioni

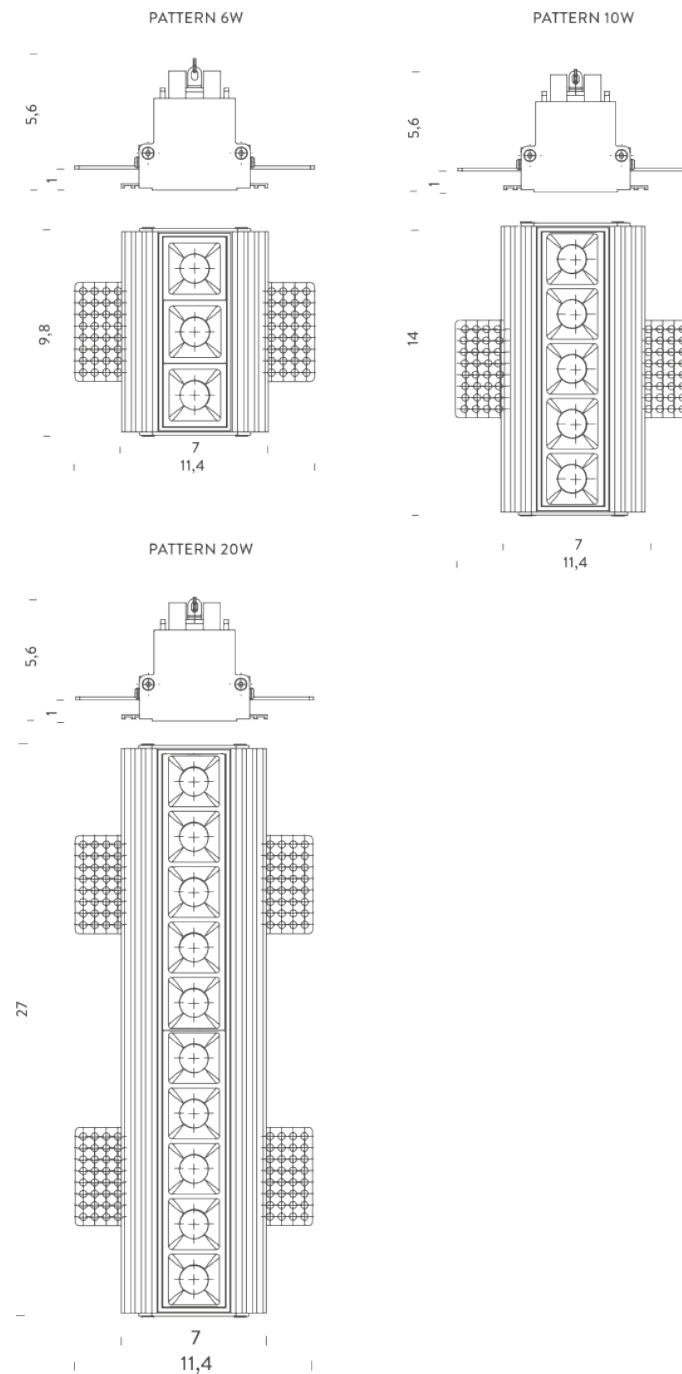

20W | 2700K

LAMPING

Source	LED
Total power	20W
Emission	direct 36°
Switching	according to driver
Tension	30V/600mA
Color temperature	2700K
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	F
IP class	20
Dimensions	273,5 x 56,5 x 70mm
Materials	aluminium
Ambient temperature range	35°C
Performance ambient temperature	25°C
Notes	compatible controls DALI/1-10V-TRIAC
Net lamp weight	0.77 kg


Codes

MPAT2110U67DNE

Structure

black

Certificazioni

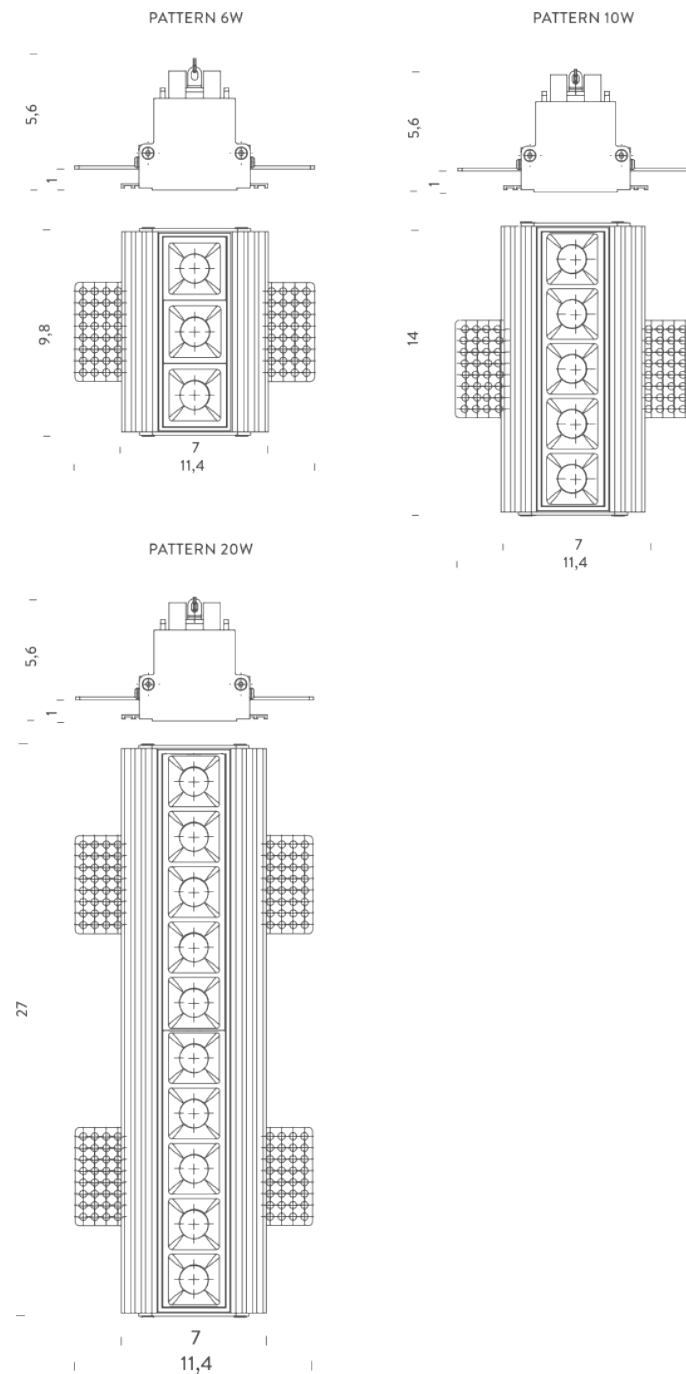

20W | 3000K

LAMPING

Source	LED
Total power	20W
Emission	direct 36°
Switching	according to driver
Tension	30V/600mA
Color temperature	3000K
Luminous flux	1444lm
Initial luminaire efficacy	73lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	F
IP class	20
Dimensions	273,5x56,5x70mm
Materials	aluminium
Ambient temperature range	35°C
Performance ambient temperature	25°C
Notes	compatible controls DALI/1-10V-TRIAC
Net lamp weight	0.77 kg

Codes

MPAT2110U67WNE

Structure

black

Certificazioni

