

GAMMA

Bernhard Osann

Gamma fits perfectly in all spaces where UGR<19 downlighting and opal uplighting is required. Featuring an essential and linear design, and a light source running the entire length of the lamp arm, it is equipped with a dimmable push button for separate management of direct and indirect light. Available in black and with two LED color temperatures.



3000K | DIM ON BOARD

LAMPING

Source	strip LED
Total power	55W
Emission	downlight UGR<19 / opal uplight
Switching	dimmer on board
Tension	220/240V
Color temperature	3000K
Luminous flux	3800lm
Typ CRI	90
IP class	40
Notes	UGR<19 separate control dimmable push botton RAL 9005 black driver included


Codes

MGAM35A1149WNE

Structure

black

Certificazioni

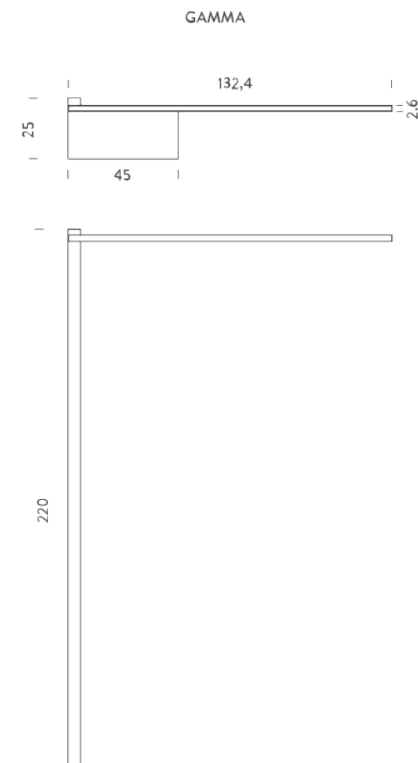

3000K | DIMMER ON BOARD + CASAMBI

LAMPING

Source	strip LED
Total power	55W
Emission	downlight UGR<19 / opal uplight
Switching	dimmer on board + CASAMBI
Tension	220/240V
Color temperature	3000K
Luminous flux	3800lm
Typ CRI	90
IP class	40
Notes	UGR<19 separate control dimmable push botton RAL 9005 black driver included


Codes

MGAM3CA1149WNE

Structure

black

Certificazioni

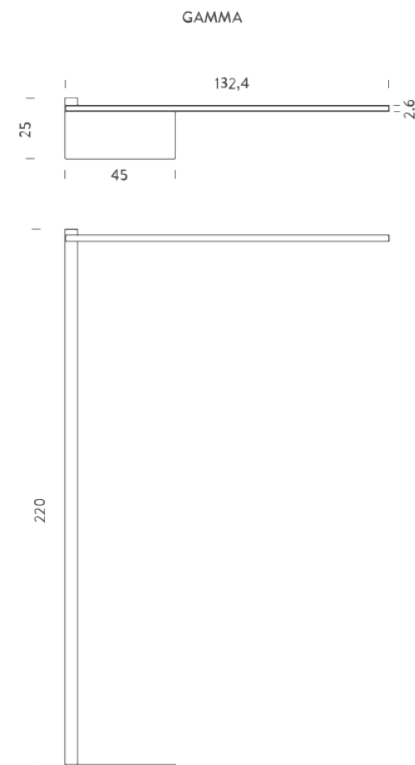

4000K | DIMMER ON BOARD

LAMPING

Source	strip LED
Total power	55W
Emission	downlight UGR<19 / opal uplight
Switching	dimmer on board
Tension	220/240V
Color temperature	4000K
Luminous flux	4000lm
Typ CRI	90
IP class	40
Notes	UGR<19 separate control dimmable push botton RAL 9005 black driver included


Codes

MGAM35A1149NNE

Structure

black

Certificazioni

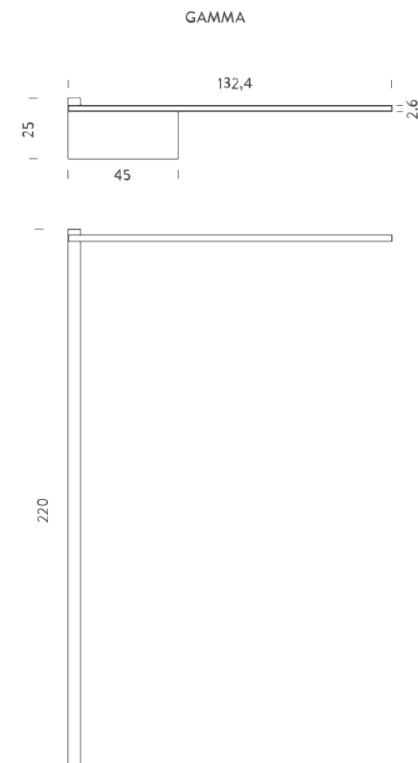

4000K | DIMMER ON BOARD + CASAMBI

LAMPING

Source	strip LED
Total power	55W
Emission	downlight UGR<19 / opal uplight
Switching	dimmer on board + CASAMBI
Tension	220/240V
Color temperature	4000K
Luminous flux	4000lm
Typ CRI	90
IP class	40
Notes	UGR<19 separate control dimmable push botton RAL 9005 black driver included

Codes

MGAM3CA1149NNE

Structure

black

Certificazioni

