


SPIGOLO FLOOR

Studiocharlie

Conçue pour offrir un éclairage directionnel à 360°, la collection Spigolo abrite des sources LED à l'intérieur d'une structure en aluminium tubulaire extrudé, reliée par des joints en polymère moulé permettant de faire tourner les profilés pour un éclairage direct ou indirect, protégé par un diffuseur en polycarbonate opale. La version au sol est conçue pour fournir une cloison virtuelle des espaces, tandis que les versions plafond et applique permettent d'éclairer l'environnement de manière polyvalente et confortable.



2700K

LAMPING

Source	3xlinear LED
Total power	6+10+33W
Emission	diffused
Switching	mono switch, dimmable on cable
Tension	110-240V
Color temperature	2700K
Luminous flux	335lm+600lm+1765lm
Typ CRI	85
IP class	20
Materials	aluminium + PC + ABS
Notes	orientable diffusers, cable length 4,5m
Net lamp weight	10 kg

Codes

SPI LW2 23
SPI LN2 23


Structure

white
black

PACKAGE

Package 01 Dimension: 57x78x16 cm / Gross weight: 6,5 kg
Package 02 Dimension: 18 x22x190 cm / Gross weight: 7 kg

Certificazioni

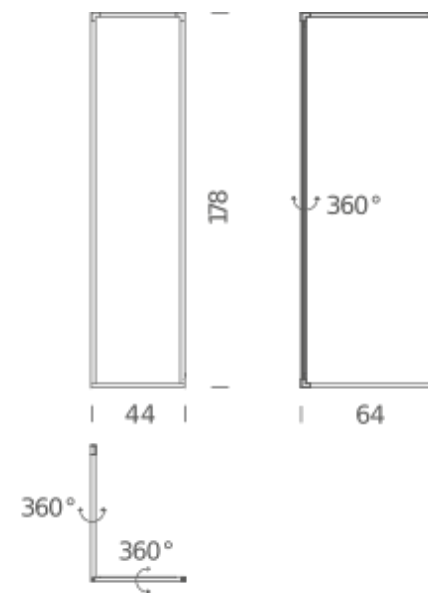

3000K

LAMPING

Source	3xlinear LED
Total power	6+10+33W
Emission	diffused
Switching	mono switch, dimmable on cable
Tension	110-240V
Color temperature	3000K
Luminous flux	335lm+600lm+1765lm
Typ CRI	85
IP class	20
Materials	aluminium + PC + ABS
Notes	orientable diffusers, cable length 4,5m
Net lamp weight	10 kg

Codes

SPI LWW 23
SPI LNN 23

Structure

white
black

PACKAGE

Package 01 Dimension: 57x78x16 cm / Gross weight: 6,5 kg
Package 02 Dimension: 18 x22x190 cm / Gross weight: 7 kg

Certificazioni

