


UNTITLED READING CONE

Bernhard Osann

Projet de synthèse réussie de mécanique et de technologie de l'éclairage, ce design est épuré et essentiel, avec des articulations miniaturisées qui permettent une flexibilité extrême de mouvement.

La version Linear a été conçue avec une optique spécifique pour assurer un confort visuel maximal dans les lieux de travail.

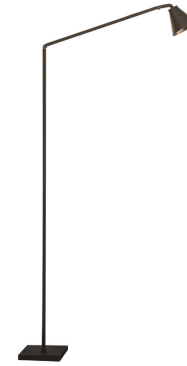

2700K

LAMPING

Source	LED spot
Total power	6,5W
Emission	direct
Switching	dimmable on board
Tension	110-240V
Color temperature	2700K
Luminous flux	395lm
Typ CRI	90
IP class	20
Materials	aluminum, technopolymer
Notes	Cable length 2m, 40° optic, 155° joint rotation
Net lamp weight	5 kg

Codes

UNT LN2 2C
UNT LN2 2D


Structure/Diffuser

black/gold
black/black

PACKAGE

Package 01 Dimension: 206x15x11 cm / Gross weight: 4,5 kg
Package 02 Dimension: 24x20x8 cm / Gross weight: 1,5 kg

Certificazioni

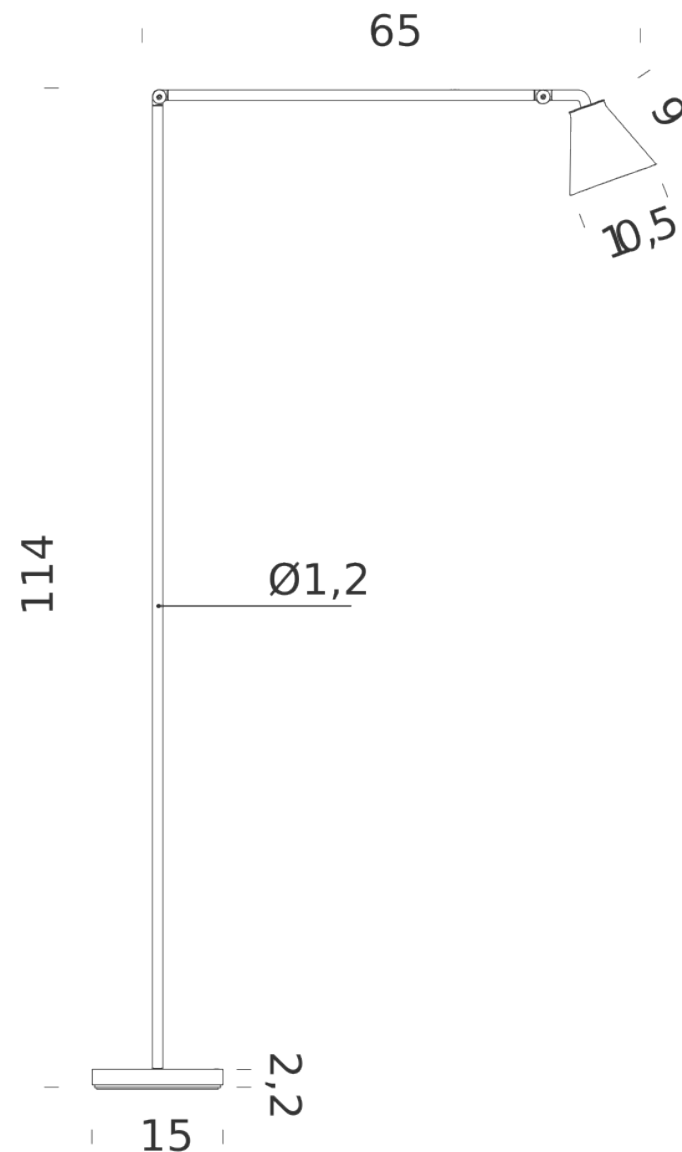

3000K

LAMPING

Source	LED spot
Total power	6,5W
Emission	direct
Switching	dimmable on board
Tension	110-240V
Color temperature	3000K
Luminous flux	395lm
Typ CRI	90
IP class	20
Materials	aluminum, technopolymer
Notes	Cable length 2m, 40° optic, 155° joint rotation
Net lamp weight	5 kg

Codes

UNT LNN 2C
UNT LNN 2D

Structure/Diffuser

black/gold
black/black

PACKAGE

Package 01	Dimension: 206x15x11 cm / Gross weight: 4,5 kg
Package 02	Dimension: 24x20x8 cm / Gross weight: 1,5 kg

Certificazioni

