

MINIFLUX OPAL

MINIFLUX est un système à LED modulaire pour intérieurs/extérieurs adapté à un éclairage de corniche, décoratif et d'accentuation. Corps en profilé en aluminium sur lequel est positionné un ruban de LED 24V DC à haut rendement, Diffuseur en polycarbonate opale pour une diffusion homogène de la lumière. L'installation est réalisée à l'aide de clips en polycarbonate transparent qui permettent l'orientation du produit. Miniflux est disponible dans diverses longueurs et température de couleur. Alimentation non incluse.



1M | 3000K

LAMPING

Source	Linear LED
Total power	15W
Emission	Diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	905lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	97
Energy class	A+
IP class	65
Dimensions	ø2x103cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cabale 2m; driver not included
Customization options	LED colour temperature, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface, Miniflux accessories, joint, PG, feeding, end-cap
Net lamp weight	0,30 kg

Codes

BBOK0910G26WPO


Structure

opal white

PACKAGE

Package 01 Dimension: 120x8,5x4 cm / Gross weight: 0,40 kg

Certificazioni

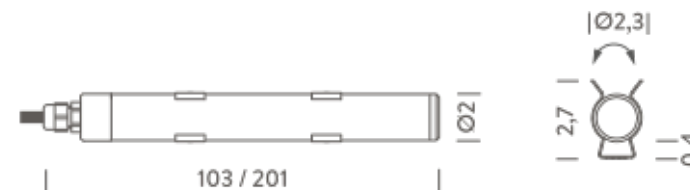

1M | 4000K

LAMPING

Source	Linear LED
Total power	15W
Emission	Diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	905lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	94
Energy class	A+
IP class	65
Dimensions	ø2x103cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cabale 2m; driver not included
Customization options	LED colour temperature, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface, Miniflux accessories, joint, PG, feeding, end-cap
Net lamp weight	0,30 kg

Codes

BBOK0910G26NPO


Structure

opal white

PACKAGE

Package 01 Dimension: 120x8,5x4 cm / Gross weight: 0,40 kg

Certificazioni

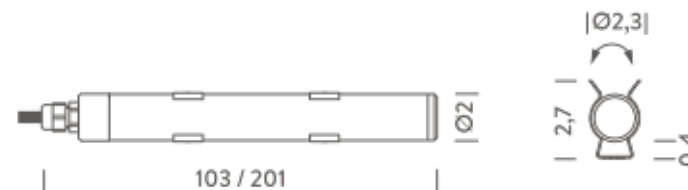

2M | 3000K

LAMPING

Source	Linear LED
Total power	30W
Emission	Diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1800lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	97
Energy class	A+
IP class	65
Dimensions	ø2x201cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cabale 2m; driver not included
Customization options	LED colour temperature, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface, Miniflux accessories, joint, PG, feeding, end-cap
Net lamp weight	0,60 kg

Codes

BBOK0920G26WPO

Structure


opal white

PACKAGE

Package 01

Dimension: 220x8,5x4 cm / Gross weight: 0,72 kg

Certificazioni

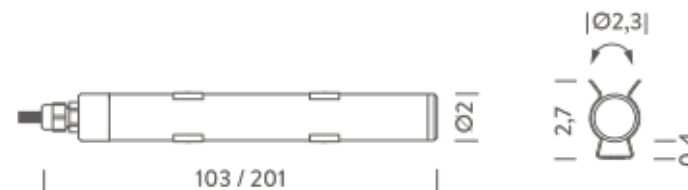

2M | 4000K

LAMPING

Source	Linear LED
Total power	30W
Emission	Diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1800lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	94
Energy class	A+
IP class	65
Dimensions	ø2x201cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cabale 2m; driver not included
Customization options	LED colour temperature, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface, Miniflux accessories, joint, PG, feeding, end-cap
Net lamp weight	0,60 kg

Codes

BBOK0920G26NPO

Structure

opal white

PACKAGE

Package 01

Dimension: 220x8,5x4 cm / Gross weight: 0,72 kg

Certificazioni

