

RIGA TRANSPARENT

RIGA est une famille de produits qui comprend une sélection de rubans LED flexibles pour extérieurs, particulièrement adaptée pour un éclairage décoratif. Riga est composé d'un ruban LED à 24V gainé dans un profilé en PVC blanc et encapsulé dans une résine polyuréthane transparente, extrêmement résistant aux agents atmosphériques et avec un excellent degré de stabilité si exposé aux rayons UV. Dans la version de la résine transparente la lumière est diffusé de face. Riga est disponible dans différentes longueurs.



1M | 2700K

LAMPING

Source	Flexible linear LED
Total power	9,6W
Emission	Direct 120°
Tension	24VDC
Color temperature	2700K
Luminous flux	1400lm
Initial luminaire efficacy	150lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x0,7x100cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,21 kg

Codes

MRIG0910035DRE

PACKAGE

Package 01


Certificazioni



Structure

white

Dimension: 22x19x8 cm / Gross weight: 0,81 kg

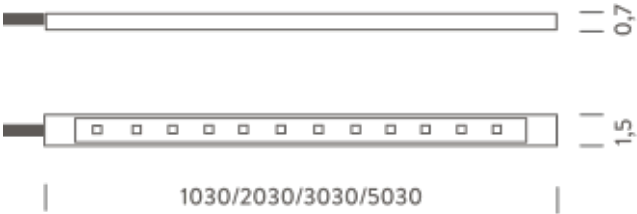

BRACKETS (included)



2M | 2700K

LAMPING

Source	Flexible linear LED
Total power	19,2W
Emission	Direct 120°
Tension	24VDC
Color temperature	2700K
Luminous flux	2800lm
Initial luminaire efficacy	150lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x0,7x200cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,48 kg

Codes

MRIG0920035DRE

PACKAGE

Package 01


Certificazioni



Structure

white

Dimension: 42x42x4,5 cm / Gross weight: 0,84 kg

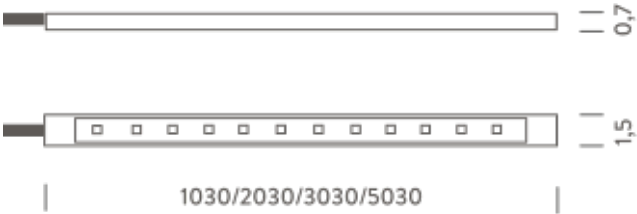

BRACKETS (included)



3M | 2700K

LAMPING

Source	Flexible linear LED
Total power	28,8W
Emission	Direct 120°
Tension	24VDC
Color temperature	2700K
Luminous flux	4200lm
Initial luminaire efficacy	150lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x0,7x300cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,72 kg

Codes

MRIG0930035DRE

PACKAGE

Package 01


Certificazioni



Structure

white

Dimension: 42x42x4,5 cm / Gross weight: 1,08 kg

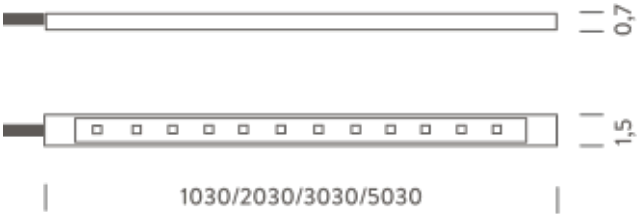

BRACKETS (included)



4M | 2700K

LAMPING

Source	Flexible linear LED
Total power	38,4W
Emission	Direct 120°
Tension	24VDC
Color temperature	2700K
Luminous flux	5600lm
Initial luminaire efficacy	150lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x0,7x400cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,96 kg

Codes


MRIG0940035DRE

PACKAGE

Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,32 kg

Certificazioni

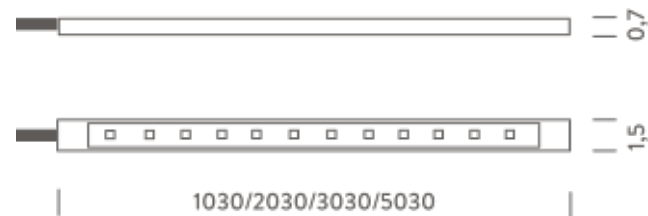

BRACKETS (included)



5M | 2700K

LAMPING

Source	Flexible linear LED
Total power	48W
Emission	Direct 120°
Tension	24VDC
Color temperature	2700K
Luminous flux	7000lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
IP class	68
Dimensions	1,5x0,7x500cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	1,2 kg

Codes

MRIG0950035DRE

PACKAGE

Package 01


Certificazioni



Structure

white

Dimension: 42x42x4,5 cm / Gross weight: 0,99 kg

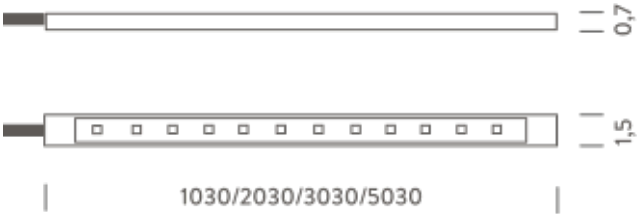

BRACKETS (included)

