

RIGA INDOOR

Ruban LED flexible pour intérieur. Riga indoor est constitué d'un ruban de LED à 12V revêtu d'une résine polyuréthane transparente. Disponible dans la température de couleur blanc chaud et bleu. Riga indoor est fourni en bobine de 5m. L'installation se fait à l'aide d'un adhésif double face déjà appliqué sur le ruban LED et de clips.



3000K | 5M

LAMPING

Source	LED strip
Total power	25W
Emission	Direct orientable
Tension	12VDC
Color temperature	3000K
Luminous flux	350lm/m
Initial luminaire efficacy	70lm/W
Initial chromaticity	SDCM < 5
Typ CRI	> 80
IP class	65
Dimensions	500x0,8x0,3cm
Materials	Resin
Ambient temperature range	-20°C / 40°C
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 0,25m; driver not included
Accessories	Drivers 12VDC + DALI interface,
Net lamp weight	1,2 kg

Codes

MRIG0450006WRE


Structure

transparent

PACKAGE

Package 01 Dimension: 32x30x12,5 cm / Gross weight: 1,32 kg

Certificazioni

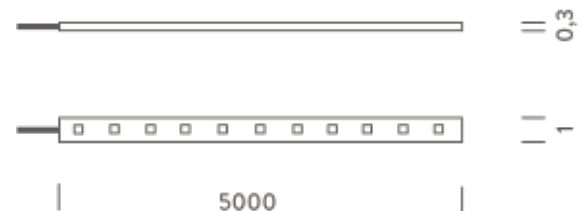

BLUE | 5M

LAMPING

Source	LED strip
Total power	25W
Emission	Direct orientable
Tension	12VDC
Color temperature	blue
Initial luminaire efficacy	< 20lm/W
Typ CRI	> 80
IP class	65
Dimensions	500x0,8x0,3cm
Materials	Resin
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 0,25m; driver not included
Accessories	Drivers 12VDC + DALI interface,
Net lamp weight	1,2 kg

Codes

MRIG04500061RE


Structure

transparent

PACKAGE

Package 01 Dimension: 32x30x12,5 cm / Gross weight: 1,32 kg

Certificazioni

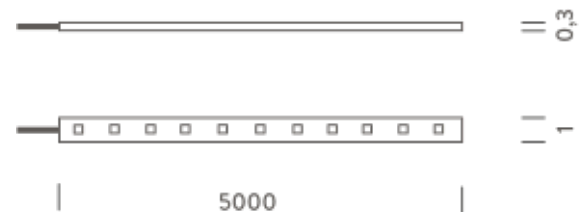

RGB | 5M

LAMPING

Source	LED strip
Total power	37,5W
Emission	Direct orientable
Tension	12VDC
Color temperature	RGB
Typ CRI	> 80
IP class	65
Dimensions	500x0,8x0,3cm
Materials	Resin
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 0,25m; driver not included
Accessories	Drivers 12VDC + DALI interface,
Net lamp weight	1,2 kg

Codes

MRIG04500065RE

Structure

transparent

PACKAGE

Package 01

Dimension: 32x30x12,5 cm / Gross weight: 1,32 kg

Certificazioni

