

# LUX SPOT

La collection LUX, caractérisée par de petits spots pour des applications extérieures, s'enrichit de versions plus puissantes pour répondre au besoin d'éclairage plus performant.

Lux Spot est un spot pour installation en surface disponible en différents flux lumineux dédiés aux besoins d'application spécifiques, finitions, températures de couleur et faisceau. Support pour installer le spot et régler l'orientation. Le spot peut également être installé à l'aide d'un piquet pour le sol.



4,2W | 3000K - 17°

## LAMPING

Source	LED
Total power	4.2W
Emission	orientable
Switching	according to driver
Tension	350mA
Color temperature	3000K
Luminous flux	366lm
Initial luminaire efficacy	87lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	Ø5x8.8x8.8
Materials	anodized aluminum
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	cable 2m, ped BLUXSPEG not included, driver not included. Compatible control 1-10V, DALI, DMX, Casambi
Customization options	2700K
Accessories	Drivers 350mA,   Peg Lux S,
Net lamp weight	0.35 kg

## Codes

BLUS1801N21WAA  
BLUS1801N21WAN

## Structure

grey  
black


## PACKAGE

Package 01 Dimension: 14,5x10x9,5 cm / Gross weight: 0,40 kg


## Certificazioni



LUX SPOT 4,2W



LUX SPOT 12W

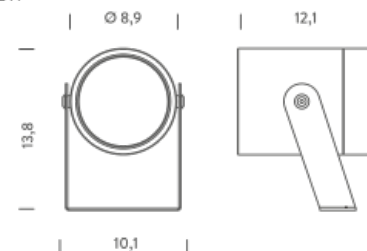

4,2W | 3000K - 46°

## LAMPING

Source	LED
Total power	4.2W
Emission	orientable
Switching	according to driver
Tension	350mA
Color temperature	3000K
Luminous flux	372lm
Initial luminaire efficacy	89lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	Ø5x8.8x8.8
Materials	anodized aluminum
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	cable 2m, ped BLUXSPEG not included, driver not included. Compatible control 1-10V, DALI, DMX, Casambi
Customization options	2700K
Accessories	Drivers 350mA,   Peg Lux S,
Net lamp weight	0.35 kg

## Codes

BLUS1801F21WAA  
BLUS1801F21WAN

## Structure

grey  
black

## PACKAGE

Package 01 Dimension: 14,5x10x9,5 cm / Gross weight: 0,40 kg


## Certificazioni



LUX SPOT 4,2W



LUX SPOT 12W

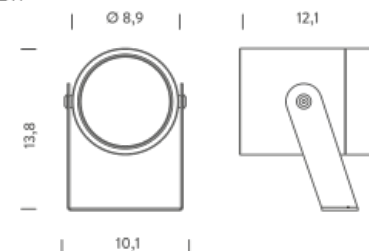

4,2W | 4000K - 17°

## LAMPING

Source	LED
Total power	4.2W
Emission	orientable
Switching	according to driver
Tension	350mA
Color temperature	4000K
Luminous flux	366lm
Initial luminaire efficacy	87lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	Ø5x8.8x8.8
Materials	anodized aluminum
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	cable 2m, ped BLUXSPEG not included, driver not included. Compatible control 1-10V, DALI, DMX, Casambi
Customization options	2700K
Accessories	Drivers 350mA,   Peg Lux S,
Net lamp weight	0.35 kg

## Codes

BLUS1801N21NAA  
BLUS1801N21NAN

## Structure

grey  
black

## PACKAGE

Package 01 Dimension: 14,5x10x9,5 cm / Gross weight: 0,40 kg


## Certificazioni



LUX SPOT 4,2W



LUX SPOT 12W

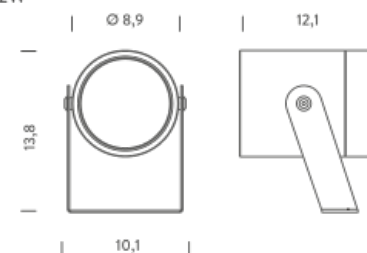

4,2W | 4000K - 46°

## LAMPING

Source	LED
Total power	4.2W
Emission	orientable
Switching	according to driver
Tension	350mA
Color temperature	4000K
Luminous flux	372lm
Initial luminaire efficacy	89lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	Ø5x8.8x8.8
Materials	anodized aluminum
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	cable 2m, ped BLUXSPEG not included, driver not included. Compatible control 1-10V, DALI, DMX, Casambi
Customization options	2700K
Accessories	Drivers 350mA,   Peg Lux S,
Net lamp weight	0.35 kg

## Codes

BLUS1801F21NAA  
BLUS1801F21NAN

## Structure

grey  
black

## PACKAGE

Package 01 Dimension: 14,5x10x9,5 cm / Gross weight: 0,40 kg


## Certificazioni



LUX SPOT 4,2W



LUX SPOT 12W

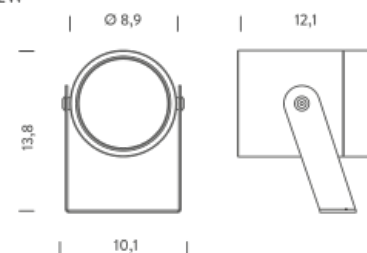

12W | 2700K - 14°

## LAMPING

Source	LED spot
Total power	12W
Emission	orientable
Switching	according to bulb
Tension	350mA
Color temperature	2700K
Luminous flux	1040lm
Initial luminaire efficacy	87lm/W
Initial chromaticity	SDCM<3
Typ CRI	>90
IP class	67
Dimensions	ø8,9x13,8
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	

Net lamp weight 1,10 kg

## Codes

BLUS1801N43DAA  
BLUS1801N43DAN

## Structure

grey  
black

## PACKAGE

Package 01 Dimension: 23,50x15x11 cm / Gross weight: 1,25 kg


## Certificazioni



## LUX SPOT 4,2W



## LUX SPOT 12W

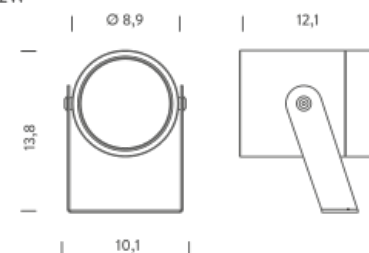

12W | 2700K - 53°

## LAMPING

Source	LED spot
Total power	12W
Emission	orientable
Switching	according to bulb
Tension	350mA
Color temperature	2700K
Luminous flux	900lm
Initial luminaire efficacy	75lm/W
Initial chromaticity	SDCM<3
Typ CRI	>90
IP class	67
Dimensions	ø8,9x13,8
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	

Net lamp weight 1,10 kg

## Codes

BLUS1801H43DAA  
BLUS1801H43DAN

## Structure

grey  
black


## PACKAGE

Package 01 Dimension: 23,50x15x11 cm / Gross weight: 1,25 kg


## Certificazioni



## LUX SPOT 4,2W

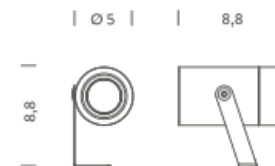

## LUX SPOT 12W

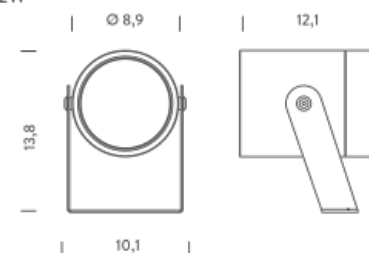

12W | 3000K - 14°

## LAMPING

Source	LED spot
Total power	12W
Emission	orientable
Switching	according to bulb
Tension	350mA
Color temperature	3000K
Luminous flux	1100lm
Initial luminaire efficacy	92lm/W
Initial chromaticity	SDCM<3
Typ CRI	>90
IP class	67
Dimensions	ø8,9x13,8
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	

Net lamp weight 1,10 kg

## Codes

BLUS1801N43WAA  
BLUS1801N43WAN

## Structure

grey  
black

## PACKAGE

Package 01 Dimension: 23,50x15x11 cm / Gross weight: 1,25 kg


## Certificazioni



LUX SPOT 4,2W



LUX SPOT 12W

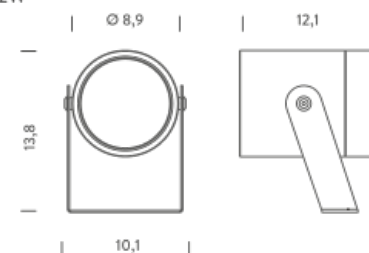



12W | 3000K - 53°

## LAMPING

Source	LED spot
Total power	12W
Emission	orientable
Switching	according to bulb
Tension	350mA
Color temperature	3000K
Luminous flux	950lm
Initial luminaire efficacy	80lm/W
Initial chromaticity	SDCM<3
Typ CRI	>90
Dimensions	ø8,9x13,8
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	

Net lamp weight 1,10 kg

## Codes

BLUS1801H43WAA  
BLUS1801H43WAN

## Structure

grey  
black

## PACKAGE

Package 01 Dimension: 23,50x15x11 cm / Gross weight: 1,25 kg


## Certificazioni



LUX SPOT 4,2W



LUX SPOT 12W

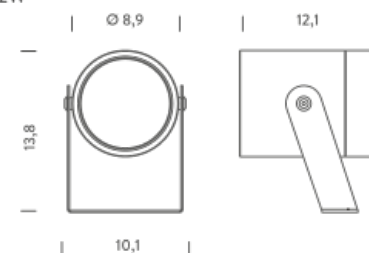

12W | 4000K - 14°

## LAMPING

Source	LED spot
Total power	12W
Emission	orientable
Switching	according to bulb
Tension	350mA
Color temperature	4000K
Luminous flux	1200lm
Initial luminaire efficacy	100lm/W
Initial chromaticity	SDCM<3
Typ CRI	>90
Dimensions	ø8,9x13,8
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	

Net lamp weight 1,10 kg

## Codes

BLUS1801N43NAA  
BLUS1801N43NAN

## Structure

grey  
black

## PACKAGE

Package 01 Dimension: 23,50x15x11 cm / Gross weight: 1,25 kg


## Certificazioni



## LUX SPOT 4,2W



## LUX SPOT 12W

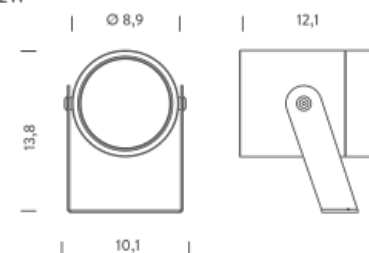

12W | 4000K - 53°

## LAMPING

Source	LED spot
Total power	12W
Emission	orientable
Switching	according to bulb
Tension	350mA
Color temperature	4000K
Luminous flux	1200lm
Initial luminaire efficacy	100lm/W
Initial chromaticity	SDCM<3
Typ CRI	>90
IP class	67
Dimensions	ø8,9x13,8
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	cable length 2m, BLUXSPEG and BLUXHC66 not included, driver not included. Compatible control: 1-10V, DALI, TRIAC series connection
Net lamp weight	1,10 kg

## Codes

BLUS1801H43NAA  
BLUS1801H43NAN

## Structure

grey  
black

## PACKAGE

Package 01 Dimension: 23,50x15x11 cm / Gross weight: 1,25 kg

## Certificazioni



LUX SPOT 4,2W



LUX SPOT 12W

