

LUX W-S

LUX W est une famille de spots avec fixation murale dédiée à l'éclairage ponctuel et décoratif de façade. La collection est en aluminium anodisé avec une finition naturelle ou noire.

LUX W est proposé en émission lumineuse simple ou double, avec deux températures de couleur et faisceaux optiques différents. Le corps des spots est orientable lors de la phase d'installation et permet ainsi de fixer le flux lumineux au choix. L'indice de rendu des couleurs est supérieur à 90 et la fixation au mur se fait grâce à une patère incluant l'alimentation.



3000K | 17°

LAMPING

Source	LED
Total power	4.2W
Emission	single direct
Switching	on/off
Tension	220/240V
Color temperature	3000K
Luminous flux	366lm
Initial luminaire efficacy	90lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	65
Dimensions	9.6xØ7.25x9.9
Materials	anodized aluminum
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	driver included
Net lamp weight	0.49 kg

Codes

BLUW4101N21WAA
BLUW4101N21WAN


Structure

grey
black

PACKAGE

Package 01 Dimension: 14,5x10x9,5 cm / Gross weight: 0,54 kg

Certificazioni

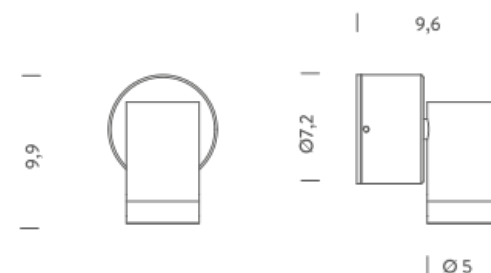

3000K | 46°

LAMPING

Source	LED
Total power	4.2W
Emission	single direct
Switching	on/off
Tension	220/240V
Color temperature	3000K
Luminous flux	372lm
Initial luminaire efficacy	90lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	65
Dimensions	9.6xØ7.25x9.9
Materials	anodized aluminum
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	driver included
Net lamp weight	0.49 kg

Codes

BLUW4101F21WAA
BLUW4101F21WAN


Structure

grey
black

PACKAGE

Package 01 Dimension: 14,5x10x9,5 cm / Gross weight: 0,54 kg

Certificazioni

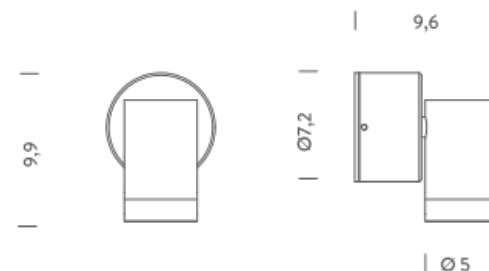

4000K | 17°

LAMPING

Source	LED
Total power	4.2W
Emission	single direct
Switching	on/off
Tension	220/240V
Color temperature	4000K
Luminous flux	366lm
Initial luminaire efficacy	90lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	65
Dimensions	9.6xØ7.25x9.9
Materials	anodized aluminum
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	driver included
Net lamp weight	0.49 kg

Codes

BLUW4101N21NAA
BLUW4101N21NAN


Structure

grey
black

PACKAGE

Package 01 Dimension: 14,5x10x9,5 cm / Gross weight: 0,54 kg

Certificazioni

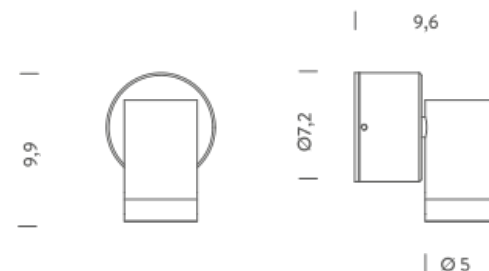

4000K | 46°

LAMPING

Source	LED
Total power	4.2W
Emission	single direct
Switching	on/off
Tension	220/240V
Color temperature	4000K
Luminous flux	372lm
Initial luminaire efficacy	90lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	65
Dimensions	9.6xØ7.25x9.9
Materials	anodized aluminum
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	driver included
Net lamp weight	0.49 kg

Codes

BLUW4101F21NAA
BLUW4101F21NAN

Structure

grey
black

PACKAGE

Package 01 Dimension: 14,5x10x9,5 cm / Gross weight: 0,54 kg

Certificazioni

