

WALKLINE WALL WASHER

WALKLINE est un système d'éclairage extérieur à LED linéaire de 24 V CC.

Proposé en deux versions dédiées respectivement à un éclairage homogène obtenu grâce à une surface en résine opale, ou wall-washer équipé d'une optique spécifique. La famille WALKLINE est proposée en différentes longueurs et températures de couleur.

Dimmable 1-10V, DALI ou DMX. Installation via le boîtier d'encastrement (inclus). WALKLINE et WALKLINE WALL-WASHER ont un indice de résistance élevé: ils sont à la fois piétonniers et carrossables. Ils trouvent leur application dans les environnements extérieurs pour du balisage ou éclairage décoratif.



0,50M | 3000K

LAMPING

Source	Linear LED
Total power	8W
Emission	wall washer
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	625lm
Typ CRI	90
IP class	67
Materials	aluminum
Mechanical impact protection code	IK10
Notes	driver not included, cable length 0,5m, certified 500kg static load, 3500kg dynamic load
Customization options	1-10V, DALI, DMX, Casambi, body length
Accessories	Drivers 24VDC + DALI interface,


Codes

BWLK0205226WAA

Structure

grey

Certificazioni

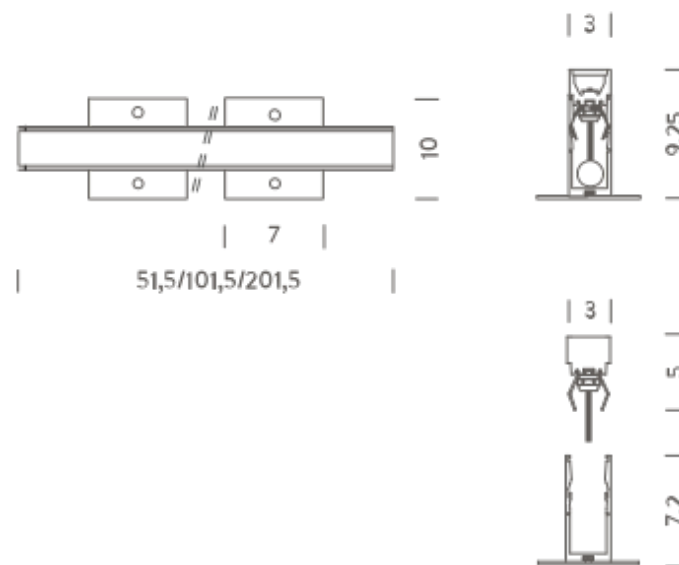

0,50M | 4000K

LAMPING

Source	Linear LED
Total power	8W
Emission	wall washer
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	650lm
Typ CRI	90
IP class	67
Materials	aluminum
Mechanical impact protection code	IK10
Notes	driver not included, cable length 0,5m, certified 500kg static load, 3500kg dynamic load
Customization options	1-10V, DALI, DMX, Casambi, body length
Accessories	Drivers 24VDC + DALI interface,


Codes

BWLK0205226NAA

Structure

grey

Certificazioni

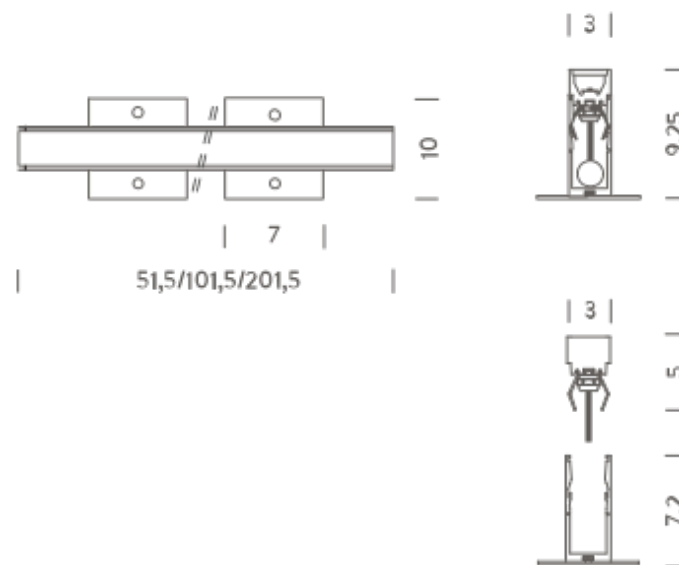

1M | 3000K

LAMPING

Source	Linear LED
Total power	16W
Emission	wall washer
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1250lm
Typ CRI	90
IP class	67
Materials	aluminum
Mechanical impact protection code	IK10
Notes	driver not included, cable length 0,5m, certified 500kg static load, 3500kg dynamic load
Customization options	1-10V, DALI, DMX, Casambi, body length
Accessories	Drivers 24VDC + DALI interface,


Codes

BWLK0210226WAA

Structure

grey

Certificazioni

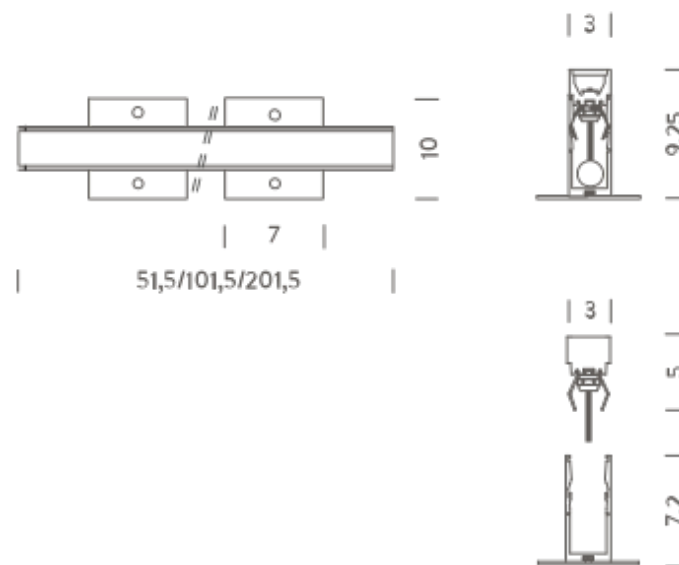

1M | 4000K

LAMPING

Source	Linear LED
Total power	16W
Emission	wall washer
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1300lm
Typ CRI	90
IP class	67
Materials	aluminum
Mechanical impact protection code	IK10
Notes	driver not included, cable length 0,5m, certified 500kg static load, 3500kg dynamic load
Customization options	1-10V, DALI, DMX, Casambi, body length
Accessories	Drivers 24VDC + DALI interface,


Codes

BWLK0210226NAA

Structure

grey

Certificazioni

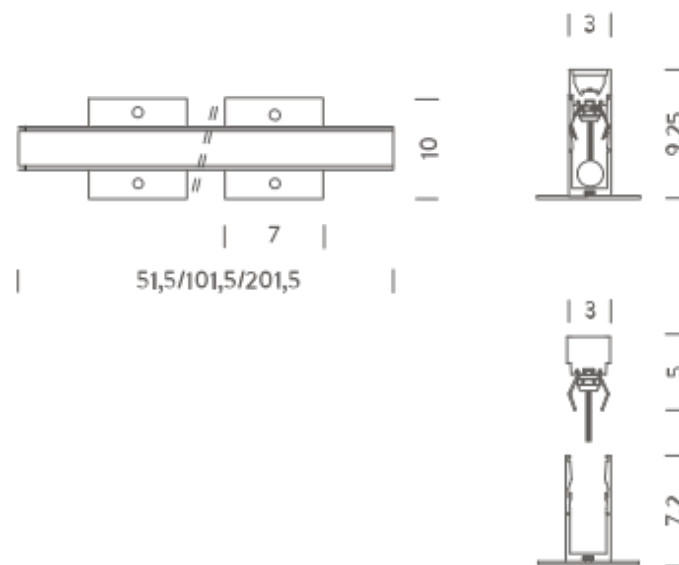

2M | 3000K

LAMPING

Source	Linear LED
Total power	32W
Emission	wall washer
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	2500lm
Typ CRI	90
IP class	67
Materials	aluminum
Mechanical impact protection code	IK10
Notes	driver not included, cable length 0,5m, certified 500kg static load, 3500kg dynamic load
Customization options	1-10V, DALI, DMX, Casambi, body length
Accessories	Drivers 24VDC + DALI interface,

Codes


BWLK0220226WAA

Structure

grey

Certificazioni

UK
CA

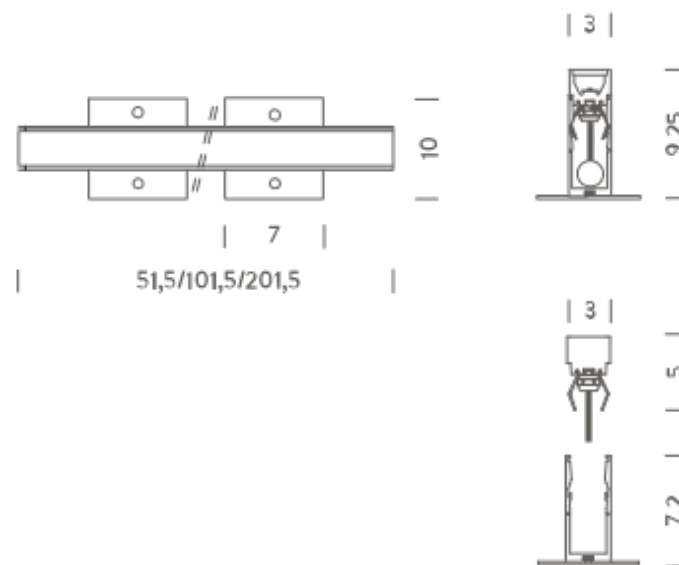

2M | 4000K

LAMPING

Source	Linear LED
Total power	32W
Emission	wall washer
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	2600lm
Typ CRI	90
IP class	67
Materials	aluminum
Mechanical impact protection code	IK10
Notes	driver not included, cable length 0,5m, certified 500kg static load, 3500kg dynamic load
Customization options	1-10V, DALI, DMX, Casambi, body length
Accessories	Drivers 24VDC + DALI interface,

Codes

BWLK0220226NAA

Structure

grey

Certificazioni

UK
CA

