

# ZIRKOL LINEAR UGR

Nouvelle lampe de la collection, ZIRKOL LINEAR UGR est équipée d'un bloc optique particulier qui permet une émission directe avec un indice d'éblouissement réduit (UGR <19). Structure en aluminium, disponible en deux finitions et deux températures de couleur.

Equippée d'une patère et d'un système de contrôle DALI, elle est particulièrement adaptée pour une utilisation dans les bureaux et les environnements de travail où un confort visuel élevé est requis.



# DOWNLIGHT | 3000K

## LAMPING

Source	LED linear
Total power	45W
Emission	Direct   UGR<19
Switching	DALI
Tension	220/240V
Color temperature	3000K
Luminous flux	3600lm
Initial luminaire efficacy	> 87lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
Energy class	F
IP class	20
Dimensions	140x2,6x5
Materials	Aluminium
Performance ambient temperature	20° C

Notes remote driver, RAL 9005 black, RAL 9016 white.

Included: 1 driver, 1 driver box (40x5x4,5cm), 1 electrical cable length 3m, 2 adjustable metal cable length 3m (including ceiling attachment)

Net lamp weight 3,2 kg

## Codes

BZRL1614I42WBO

BZRL1614I42WNE

## Structure

white


black

## PACKAGE

Package 01

Dimension: 204x11x11 cm / Gross weight: 5 kg

## Certificazioni

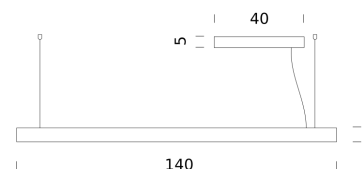



# UP-DOWNLIGHT | 3000K

## LAMPING

Source	LED linear
Total power	60W
Emission	Direct   UGR<19 - Indirect diffused
Switching	DALI
Tension	220/240V
Color temperature	3000K
Luminous flux	4700lm
Initial luminaire efficacy	> 75 lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
Energy class	F
IP class	20
Dimensions	140x2,6x5
Materials	Aluminium
Performance ambient temperature	20° C

Notes remote driver, RAL 9005 black, RAL 9016 white.

Included: 1 driver, 1 driver box (40x5x4,5cm), 1 electrical cable length 3m, 2 adjustable metal cable length 3m (including ceiling attachment)

Net lamp weight 3,2 kg

## Codes

BZRL1714I49WBO

BZRL1714I49WNE

## Structure

white


black

## PACKAGE

Package 01

Dimension: 204x11x11 cm / Gross weight: 5 kg

## Certificazioni



# UP-DOWNLIGHT | 4000K

## LAMPING

Source	LED linear
Total power	60W
Emission	Direct   UGR<19 - Indirect diffused
Switching	DALI
Tension	220/240V
Color temperature	4000K
Luminous flux	4900lm
Initial luminaire efficacy	> 75lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
Energy class	E
IP class	20
Dimensions	140x2,6x5
Materials	Aluminium
Performance ambient temperature	20° C

Notes remote driver, RAL 9005 black, RAL 9016 white.

Included: 1 driver, 1 driver box (40x5x4,5cm), 1 electrical cable length 3m, 2 adjustable metal cable length 3m (including ceiling attachment)

Net lamp weight 3,2 kg

## Codes

BZRL1714I49NBO

BZRL1714I49NNE

## Structure

white

black

## PACKAGE

Package 01

Dimension: 204x11x11 cm / Gross weight: 5 kg

## Certificazioni

