

ZIRKOL CEILING

Le purisme contemporain de la collection Zirkol s'étend maintenant au nouveau Zirkol Ceiling: pour la première fois, Nemo Studio propose une application au plafond du Zirkol C. Les bordures circulaires harmonieuses se confondent avec l'élément linéaire dissimulant le driver intégré à travers un boîtier magnétique. Disponible dans une variété de diamètres, Zirkol Ceiling répond aux besoins résidentiels et professionnels, évitant l'installation d'accessoires à distance.



Ø 0,85M | 2700K

LAMPING

Source	Linear LED
Total power	35W
Emission	Diffused
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	2000lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	ø 0,85m x 5cm
Materials	Aluminium
Notes	driver box with 1 x driver Superslim RAL 9005 black RAL 9016 white shipped assembled

Customization options

Lumen output, finish

Codes

BZRCD408G15DBO
BZRCD408G15DNE
BZRCD408G15DOR




Structure

white
black
matte gold

Certificazioni



ZIRKOL CEILING 0,85-1-1,5M

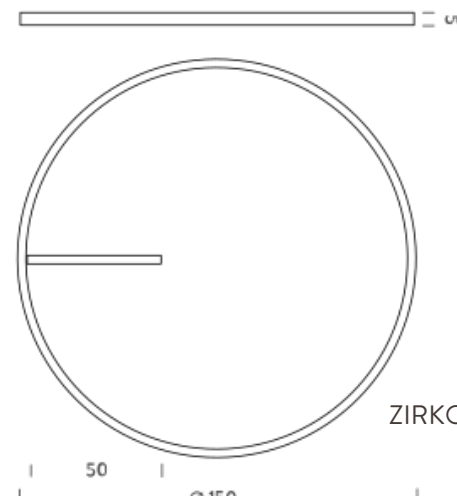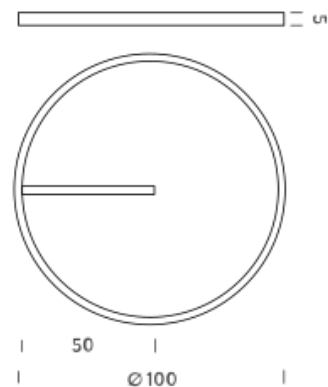

Ø 0,85M | 3000K

LAMPING

Source	Linear LED
Total power	35W
Emission	Diffused
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	2200lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	ø 0,85m x 5cm
Materials	Aluminium
Notes	driver box with 1 x driver Superslim RAL 9005 black RAL 9016 white shipped assembled
Customization options	Lumen output, finish

Codes

BZRCD408G15WBO
BZRCD408G15WNE
BZRCD408G15WOR




Structure

white
black
matte gold

Certificazioni



ZIRKOL CEILING 0,85-1-1,5M

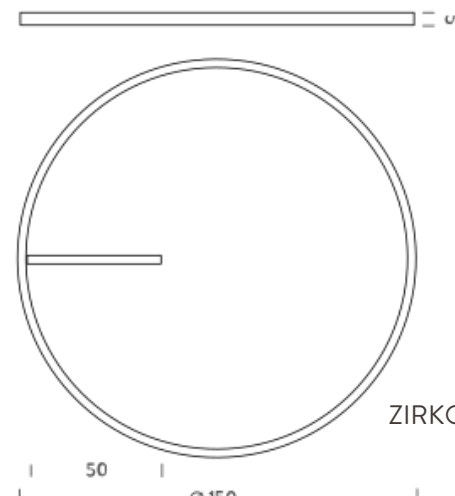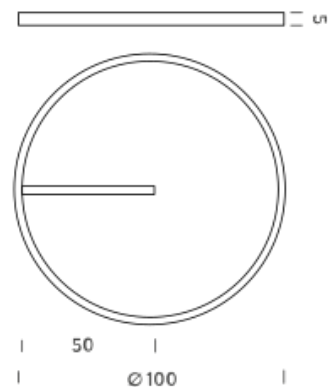

Ø 0,85M | 4000K

LAMPING

Source	Linear LED
Total power	35W
Emission	Diffused
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	2360lm
Typ CRI	90
Energy class	D
IP class	40
Dimensions	ø 0,85m x 5cm
Materials	Aluminium
Notes	driver box with 1 x driver Superslim RAL 9005 black RAL 9016 white shipped assembled
Customization options	Lumen output, finish

Codes

BZRCD408G15NBO
BZRCD408G15NNE
BZRCD408G15NOR



Structure

white
black
matte gold

Certificazioni



ZIRKOL CEILING 0,85-1-1,5M

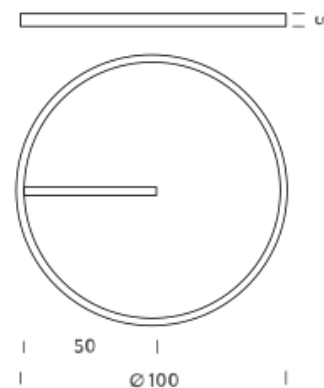

Ø 1M | 2700K

LAMPING

Source	Linear LED
Total power	45W
Emission	Diffused
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	2616lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	ø 1m x 5cm
Materials	Aluminium
Notes	driver box with 1 x driver Superslim RAL 9005 black RAL 9016 white shipped assembled

Customization options

Lumen output, finish

Codes

BZRCD410G15DBO
BZRCD410G15DNE
BZRCD410G15DOR




Structure

white
black
matte gold

Certificazioni



ZIRKOL CEILING 0,85-1-1,5M

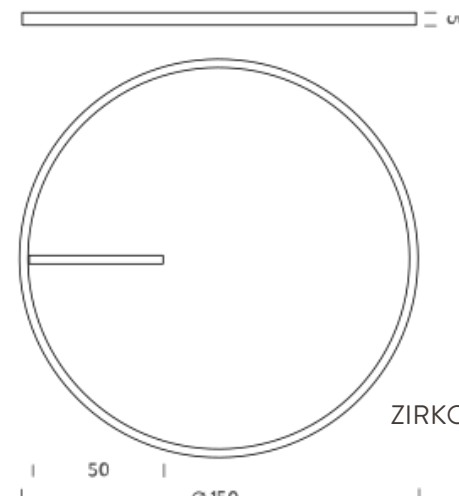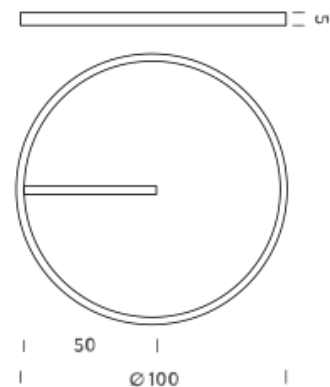

Ø 1M | 3000K

LAMPING

Source	Linear LED
Total power	45W
Emission	Diffused
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	2769lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	ø 1m x 5cm
Materials	Aluminimu
Notes	driver box with 1 x driver Superslim RAL 9005 black RAL 9016 white shipped assembled

Customization options

Codes

BZRCD410G15WBO
BZRCD410G15WNE
BZRCD410G15WOR



Structure

white
black
matte gold

Certificazioni



ZIRKOL CEILING 0,85-1-1,5M

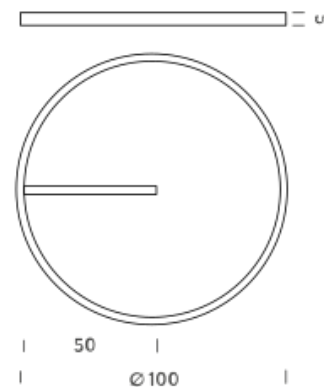

Ø 1M | 4000K

LAMPING

Source	Linear LED
Total power	45W
Emission	Diffused
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	3077lm
Typ CRI	90
Energy class	D
IP class	40
Dimensions	ø 1m x 5cm
Materials	Aluminium
Notes	driver box with 1 x driver Superslim RAL 9005 black RAL 9016 white shipped assembled

Customization options

Codes

BZRCD410G15NBO
BZRCD410G15NNE
BZRCD410G15NOR




Structure

white
black
matte gold

Certificazioni



ZIRKOL CEILING 0,85-1-1,5M

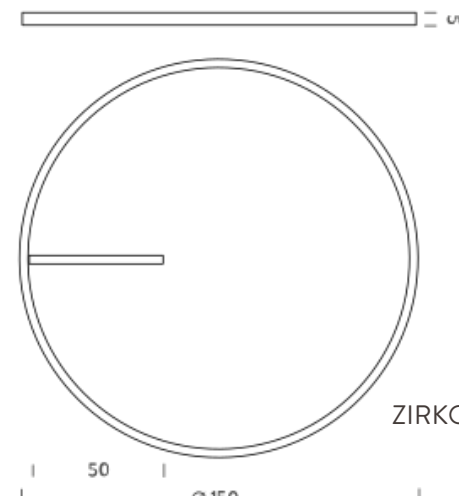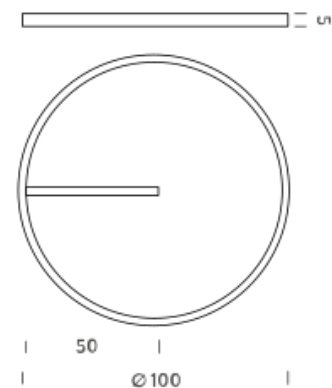

Ø 1,5M | 2700K

LAMPING

Source	Linear LED
Total power	68W
Emission	Diffused
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	3923lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	ø 1,5m x 5cm
Materials	Aluminium
Notes	

driver box with 1 x driver Superslim | RAL 9005 black |
RAL 9016 white | shipped assembled
Lumen output, finish

Customization options

Codes

BZRCD415G15DBO
BZRCD415G15DNE
BZRCD415G15DOR




Structure

white
black
matte gold

Certificazioni



ZIRKOL CEILING 0,85-1-1,5M

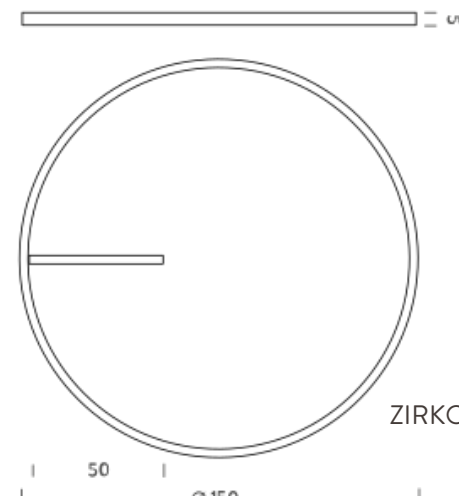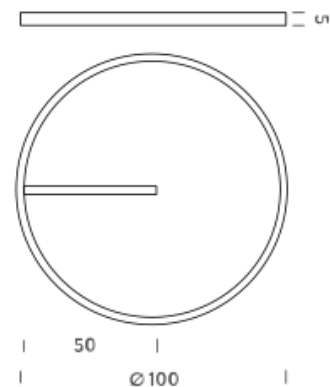

Ø 1,5M | 3000K

LAMPING

Source	Linear LED
Total power	68W
Emission	Diffused
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	4154lm
Typ CRI	90
Energy class	E
IP class	40
Dimensions	ø 1,5m x 5cm
Materials	Aluminium
Notes	driver box with 1 x driver Superslim RAL 9005 black RAL 9016 white shipped assembled
Customization options	Lumen output, finish

Codes

BZRCD415G15WBO
BZRCD415G15WNE
BZRCD415G15WOR




Structure

white
black
matte gold

Certificazioni



ZIRKOL CEILING 0,85-1-1,5M

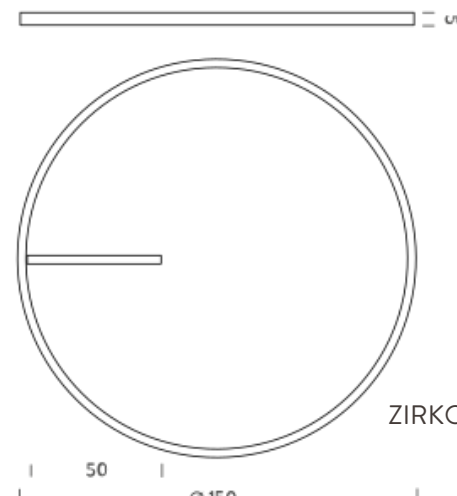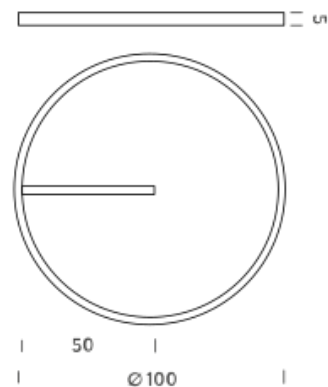

Ø 1,5M | 4000K

LAMPING

Source	Linear LED
Total power	68W
Emission	Diffused
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	4616lm
Typ CRI	90
Energy class	D
IP class	40
Dimensions	ø 1,5m x 5cm
Materials	Aluminium
Notes	driver box with 1 x driver Superslim RAL 9005 black RAL 9016 white shipped assembled

Customization options

Lumen output, finish

Codes

BZRCD415G15NBO
BZRCD415G15NNE
BZRCD415G15NOR

Structure

white
black
matte gold

Certificazioni



ZIRKOL CEILING 0,85-1-1,5M

