

LUX SURFACE

LUX est la collection des spots à performance élevée pour application en extérieur.

Lux Surface convient aux applications downlight et garantit un éclairage direct et homogène. Il est disponible en différentes finitions, températures de couleur et angles de faisceau. Chauffeur à bord.



SURFACE | 2700° - 14°

LAMPING

Source	LED
Total power	13,5W
Emission	14°
Tension	220/240V
Color temperature	2700K
Luminous flux	1040lm
Initial luminaire efficacy	77lm/W
Initial chromaticity	SDCM<3
Typ CRI	>90
Energy class	F
IP class	65
Dimensions	Ø8,9x13,8
Materials	Aluminium
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	Driver on board UGR<19
Net lamp weight	1,03 kg

Codes

BLUC0901N43DAA
BLUC0901N43DAN


Structure

grey
black

PACKAGE

Package 01 Dimension: 23,5x15x11 cm / Gross weight: 1,18 kg

Certificazioni

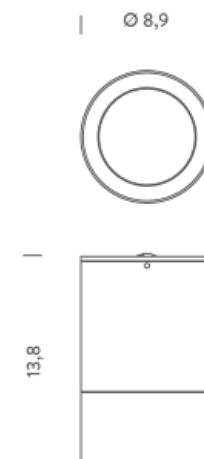

SURFACE | 2700° - 53°

LAMPING

Source	LED
Total power	13,5W
Emission	53°
Tension	220/240V
Color temperature	2700K
Luminous flux	900lm
Initial luminaire efficacy	67lm/W
Initial chromaticity	SDCM<3
Typ CRI	>90
Energy class	F
IP class	65
Dimensions	Ø8,9x13,8
Materials	Aluminium
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	Driver on board UGR<19
Net lamp weight	1,03 kg

Codes

BLUC0901H43DAA
BLUC0901H43DAN


Structure

grey
black

PACKAGE

Package 01 Dimension: 23,5x15x11 cm / Gross weight: 1,18 kg

Certificazioni

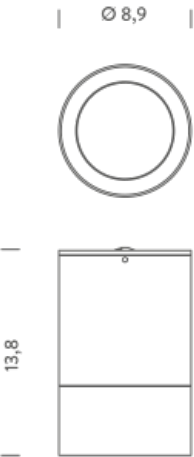

SURFACE | 3000° - 14°

LAMPING

Source	LED
Total power	13,5W
Emission	14°
Tension	220/240V
Color temperature	3000K
Luminous flux	1100lm
Initial luminaire efficacy	81lm/W
Initial chromaticity	SDCM<3
Typ CRI	>90
Energy class	F
IP class	65
Dimensions	Ø8,9x13,8
Materials	Aluminium
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	Driver on board UGR<19
Net lamp weight	1,03 kg

Codes

BLUC0901N43WAA
BLUC0901N43WAN


Structure

grey
black

PACKAGE

Package 01 Dimension: 23,5x15x11 cm / Gross weight: 1,18 kg

Certificazioni

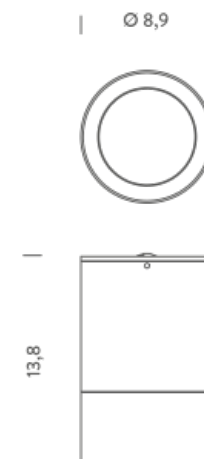

SURFACE | 3000° - 53°

LAMPING

Source	LED
Total power	13,5W
Emission	53°
Tension	220/240V
Color temperature	3000K
Luminous flux	950lm
Initial luminaire efficacy	70lm/W
Initial chromaticity	SDCM<3
Typ CRI	>90
Energy class	F
IP class	65
Dimensions	Ø8,9x13,8
Materials	Aluminium
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	Driver on board UGR<19
Net lamp weight	1,03 kg

Codes

BLUC0901H43WAA
BLUC0901H43WAN


Structure

grey
black

PACKAGE

Package 01 Dimension: 23,5x15x11 cm / Gross weight: 1,18 kg

Certificazioni

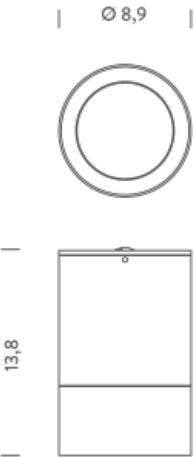

SURFACE | 4000° - 14°

LAMPING

Source	LED
Total power	13,5W
Emission	14°
Tension	220/240V
Color temperature	4000K
Luminous flux	1200lm
Initial luminaire efficacy	89lm/W
Initial chromaticity	SDCM<3
Typ CRI	>90
Energy class	F
IP class	65
Dimensions	Ø8,9x13,8
Materials	Aluminium
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	Driver on board UGR<19
Net lamp weight	1,03 kg

Codes

BLUC0901N43NAA
BLUC0901N43NAN


Structure

grey
black

PACKAGE

Package 01 Dimension: 23,5x15x11 cm / Gross weight: 1,18 kg

Certificazioni

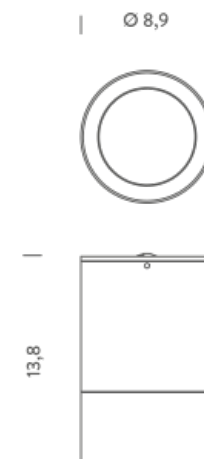

SURFACE | 4000° - 53°

LAMPING

Source	LED
Total power	13,5W
Emission	53°
Tension	220/240V
Color temperature	4000K
Luminous flux	1050lm
Initial luminaire efficacy	78lm/W
Initial chromaticity	SDCM<3
Typ CRI	>90
Energy class	F
IP class	65
Dimensions	Ø8,9x13,8
Materials	Aluminium
Ambient temperature range	-20°C/35°C
Performance ambient temperature	25°C
Notes	Driver on board UGR<19
Net lamp weight	1,03 kg

Codes

BLUC0901H43NAA
BLUC0901H43NAN

Structure

grey
black

PACKAGE

Package 01 Dimension: 23,5x15x11 cm / Gross weight: 1,18 kg

Certificazioni

