


LINESCAPES

PENDANT HORIZONTAL

Un tratto di luce chiaro e compatto definisce un classico nel mondo dell'illuminazione. Ispirato a un progetto speciale per una collezione privata di arte contemporanea, Linescapes si presenta versatile e con un'elevata efficacia luminosa garantita dal suo sviluppo lineare multidirezionale.

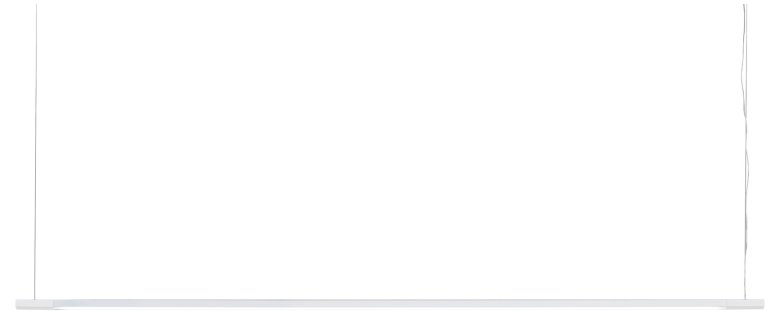

L130 - 2700K

LAMPING

Source	linear LED
Total power	19W
Emission	diffused side emission
Switching	dimnable 1-10V
Tension	110-240V
Color temperature	2700K
Luminous flux	1125lm
Typ CRI	85
IP class	20
Materials	Aluminium + PC + ABS
Notes	metal cable length 3m, electrical cable length 3m, 360° orientable

Codes

LIN LW2 5D

LIN LN2 5D

Structure

white

black

PACKAGE


Package 01

Package 02

Dimension: 65x18x23 cm / Gross weight: 2,5 kg

Dimension: 110x5x5 cm / Gross weight: 1 kg

Certificazioni

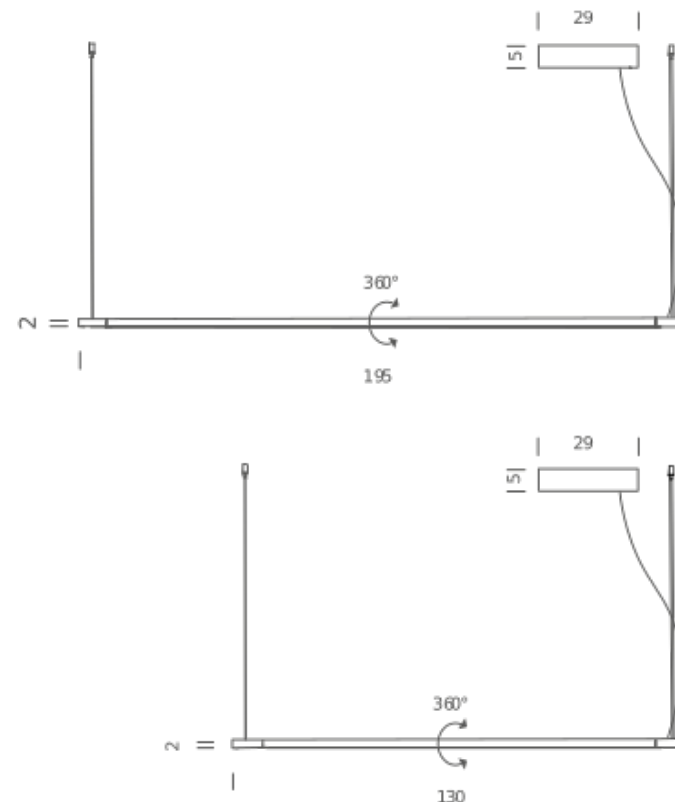

L130 - 3000K

LAMPING

Source	linear LED
Total power	19W
Emission	diffused side emission
Switching	dimmable 1-10V
Tension	110-240V
Color temperature	3000K
Luminous flux	1125lm
Typ CRI	85
IP class	20
Materials	Aluminium + PC + ABS
Notes	metal cable length 3m, electrical cable length 3m, 360° orientable

Codes

LIN LWW 5D

LIN LNN 5D

Structure

white

black

PACKAGE


Package 01

Dimension: 65x18x23 cm / Gross weight: 2,5 kg

Package 02

Dimension: 110x5x5 cm / Gross weight: 1 kg

Certificazioni

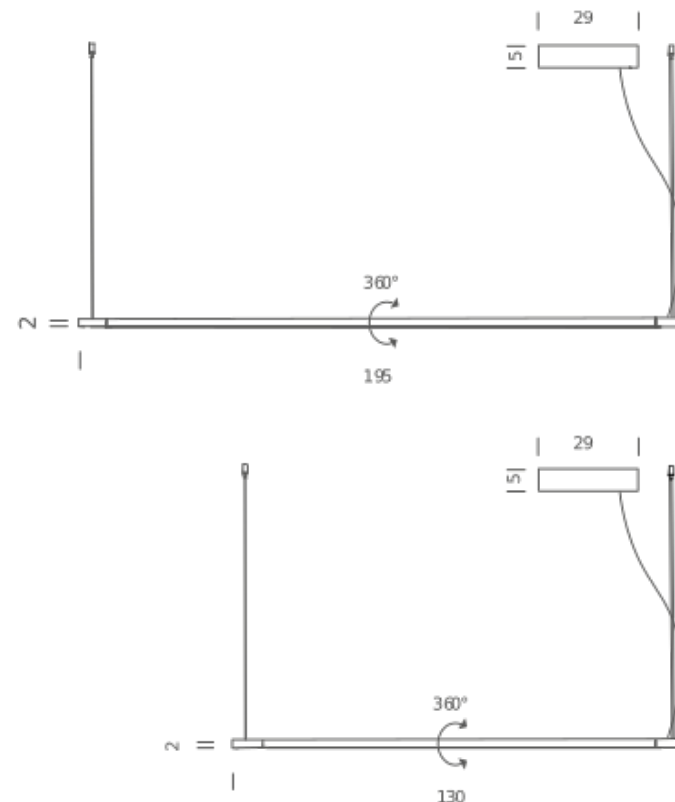

L200 - 2700K

LAMPING

Source	linear LED
Total power	33W
Emission	diffused side emission
Switching	dimmable 1-10V
Tension	110-240V
Color temperature	2700K
Luminous flux	1765lm
Typ CRI	85
IP class	20
Materials	Aluminium + PC + ABS
Notes	metal cable length 3m, electrical cable length 3m, 360° orientable

Codes

LIN LW2 5E

LIN LN2 5E

Structure

white

black

PACKAGE


Package 01

Package 02

Dimension: 65x18x23 cm / Gross weight: 2,5 kg

Dimension: 175x5x5 cm / Gross weight: 1 kg

Certificazioni

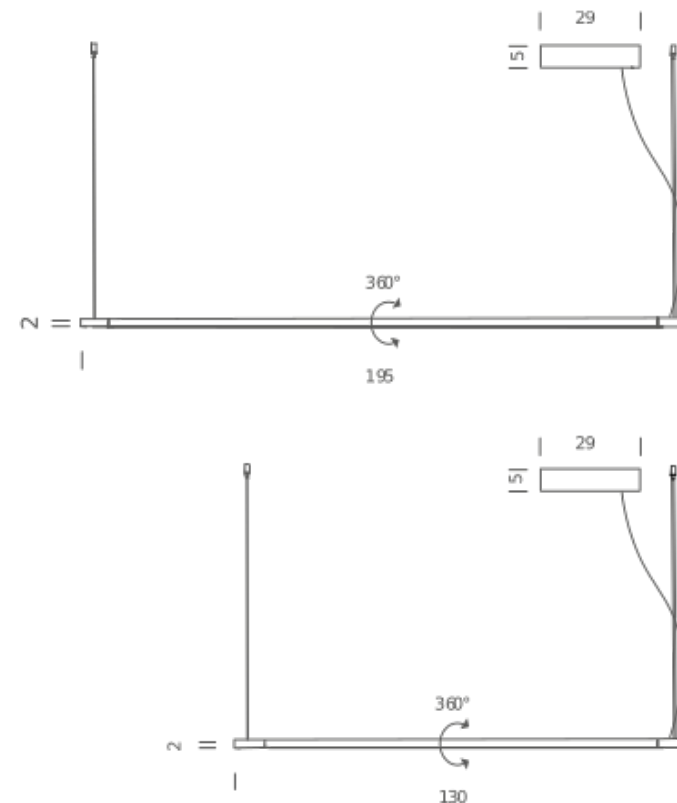

L200 - 3000K

LAMPING

Source	linear LED
Total power	33W
Emission	diffused side emission
Switching	dimnable 1-10V
Tension	110-240V
Color temperature	3000K
Luminous flux	1765lm
Typ CRI	85
IP class	20
Materials	Aluminium + PC + ABS
Notes	metal cable length 3m, electrical cable length 3m, 360° orientable

Codes

LIN LWW 5E

LIN LNN 5E

Structure

white

black

PACKAGE

Package 01

Dimension: 65x18x23 cm / Gross weight: 2,5 kg

Package 02

Dimension: 175x5x5 cm / Gross weight: 1 kg

Certificazioni

